LIFETIME

OUTDOOR STORAGE

# MODEL N° 60026

CONSISTS OF MODEL N° 6417
AND EXTENSION KIT MODEL N° 6426

COPY

**Keep this Identification Number in case you need to contact our Customer Service Department.**

LIFETIME

OUTDOOR STORAGE

## MODEL N° 6417

# *OWNER'S MANUAL*

Copy

**Keep this Identification Number in case you need to contact our Customer Service Department.**

Dear Valued Customer,

We would like to congratulate you on your purchase of a Lifetime© Outdoor Storage Shed! We are confident that you have made the perfect choice and you will be very pleased with your new storage solution.

Lifetime© Outdoor Storage is part of the family of products created and manufactured by Lifetime® Products, Inc. Like all of our products, you can be assured that the quality of your Lifetime Outdoor Storage Shed is the best in the world! And, we back that quality up by offering the best warranty in the business—A 10-year warranty that fully covers the Shed!

All of our Sheds are built with the highest-quality steel and high-density polyethylene (HDPE) parts. The design and construction of our steel-reinforced double-Wall Panels is second to none. All of our exposed steel parts and gables are powder coated and we use high-density polyethylene plastic. What makes polyethylene so special? It has superior strength and durability, and, it won't crack or degrade outdoors.

So now that you know the quality you are getting in a Lifetime Outdoor Storage Shed, please take the time to READ THIS INSTRUCTION MANUAL!

We have taken great care in providing the best possible form of instructions to help you put your new Outdoor Storage Shed together. Before you get started, PLEASE read the following preparation tips to help you get started!

We can assure you, your construction experience will be a lot more enjoyable if you do!

PREPARATION TIPS:

- The first step is simple… RELAX! You have made a great purchase, but Rome was not built in a day. Plan to spend a good part of your weekend putting together your fine Outdoor Storage Shed. Our philosophy is, if it comes together quickly and easily, it surely will come apart quickly and easily! Your Lifetime© Outdoor Storage Shed will surely last a long, long time, if you are patient, and take all the time necessary to put it together as we have instructed.

- Grab a friend to join in on the fun! This is not a one-person endeavor. We have found that not only will things go smoother if you have two or more people participating in the construction of the Shed, but it will go quicker as well. So, the more the merrier!

- Make sure you have all the tools necessary for constructing your new Shed. There is a "Tools Required For This Assembly" list on page five of this Owner's Manual.

- The plastic pieces of your Shed may become damaged by over tightening the screws. To avoid this damage, we strongly recommend the use of a low-powered power screwdriver or a drill that has an adjustable clutch that is set on a low-torque setting. If neither is available, use a hand screwdriver. If a hand screwdriver is all you have, take several breaks… your wrist will need it!

- You will also need two small ladders (when it comes time to do the roof!).

COPY

## IMPORTANT! PLEASE READ BEFORE BEGINNING ASSEMBLY

- Before beginning assembly, remove the Parts List from the center of this Owner's Manual and take an inventory of the parts included with your Outdoor Storage Shed. Also, read through the entire instruction manual. It's always a great practice to get a feel for the flow of the process and to familiarize yourself with the parts involved. But, try not to get ahead of yourself and start the process out of order.

- FOLLOW THE INSTRUCTIONS IN ORDER! Everything goes together in a certain order, and we have learned what that correct order should be. In our state-of-the-art research and testing facility, we have painstakingly created these instructions. The order of construction is there for a reason, and some parts simply will not fit if built out of order. Just follow along with the order in the instructions and everything will fit together and things will go very smooth.

- YOUR SHED MUST BE BUILT ON A LEVEL SURFACE! If the spot you have chosen to place your wonderful new Outdoor Storage Shed is not level, the Shed will not assemble correctly! We recommend a concrete patio, a wood platform or creating a pad with pea gravel. Your Shed is meant to last a lifetime, so provide the proper foundation for it before you start to build.

- Before you build it, make sure you are allowed to build it! Consult all building codes, as well as city and county ordinances, to ensure that you do not require a building permit to construct your Outdoor Storage Shed. Proper building permit documentation may be required in your neighborhood, and it would be quite unfortunate to learn this after your Outdoor Storage Shed is already built!

Now that you're ready to begin the construction of your wonderful new Outdoor Storage Shed, step back, take a deep breath, get yourself a large cold beverage and enjoy yourself. We guarantee that after spending the right amount of time in building your Shed, you will be able to enjoy it for years to come.

Thanks for choosing Lifetime©, and have fun!

## ABOUT LIFETIME PRODUCTS, INC.

Lifetime Products, Inc., has applied innovation and cutting-edge technology in plastics and metals to create a family of affordable lifestyle products that feature superior strength and durability. The world's leading manufacturer of folding tables and chairs, Lifetime was founded in 1986 as the maker of portable basketball systems that revolutionized the industry with patented technology. With diverse offerings such as outdoor storage sheds and steel utility trailers, Lifetime continues to develop innovative products that outfit the way you live.

Lifetime makes the things you need for the lifestyle you want. By innovating products in and around the home, Lifetime simplifies your everyday life and enables you to get the most out of your free time.

LIFETIME®

OUTDOOR STORAGE

## REGISTER YOUR PRODUCT ONLINE AT WWW.LIFETIME.COM

**At Lifetime, we are committed to providing innovative and quality products. While registering, you will have the opportunity to give us your feedback. Your input is valuable to us.**

- You can also opt in to receive new product notifications or promotions.
- In the unlikely event of a product recall or safety modification, your registration provides the information we need to notify you directly.
- Registration is fast, easy, and completely voluntary.

**LIFETIME'S PROMISE TO YOU:**

*Maintaining your privacy is our long-standing policy at Lifetime. And you can rest assured that Lifetime will not sell or provide your personal data to other third parties, or allow them to use your personal data for their own purposes.*

We invite you to read our privacy policy at www.lifetime.com

**REGISTER today!**

****U.S. and Canada customers ONLY****

IF ASSISTANCE IS NEEDED,

## DO NOT CONTACT THE STORE!

**CALL OUR CUSTOMER SERVICE DEPARTMENT at 1 (800) 225-3865**

HOURS: 7:00 a.m. to 5:00 p.m. Monday through Friday (Mountain Standard Time)

**Call, or visit our Web site for Saturday hours**

**For customers outside the U.S. or Canada, please contact the store for assistance.**

## SAFETY INSTRUCTIONS

**FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN SERIOUS INJURY OR PROPERTY DAMAGE AND WILL VOID WARRANTY.**

To ensure safety, do not attempt to assemble this product without following the instructions carefully. Check entire box and inside all packing material for parts and/or additional instruction material. Before beginning assembly, read the instructions and identify parts using the hardware identifier and parts list in this document. Proper and complete assembly, use and supervision are essential to reduce the risk of accident or injury.

- Do not use or store hot objects such as grills, blowtorches, welding equipment, etc. near the product.
- If using a ladder during assembly, use extreme caution.
- Two capable adults are required for assembly. (It is also recommended that a third adult function as an instruction reader.)

*Most injuries are caused by misuse and/or not following instructions. Use caution when using this product.*

## BEFORE BEGINNING ASSEMBLY

Keep the hardware bags and their contents separate. If any parts are missing, call our Customer Service Department.

Read the "Congratulations" letter on page 2-3. Identify and inventory all parts and hardware using the parts and hardware lists and identifiers in this document.

## *Two adults required to complete assembly*

**Only adults should set up the product. Do not allow children in the set-up area until assembly is complete.**

## TOOLS REQUIRED FOR THIS ASSEMBLY

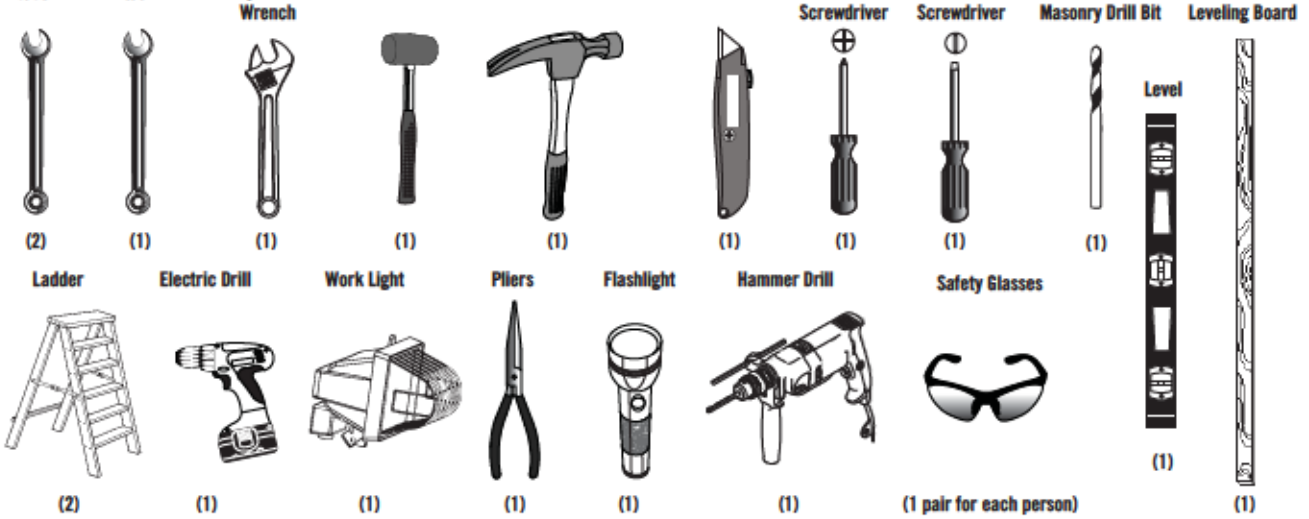


*Read the "Screwdriver Notice" on page 7.

# ASSEMBLY GUIDES

***Refer to the following areas throughout the instructions to assist in the assembly process:***

**This area is located at the top, left-hand corner of the page and indicates which tools and hardware are needed to complete the assembly steps on a page.**

**This area is located at the top, right-hand corner of the page and shows an image of the product with shaded parts indicating which section is being assembled.**

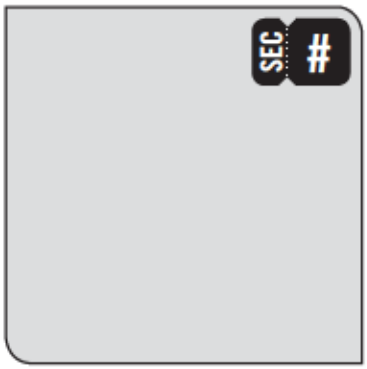


**This area is usually located in the bottom, left-hand corner of a step and indicates that special attention is needed to perform a particular part of a step.**

**These areas are usually located in the bottom, right-hand corner of a step and indicate that damage to the product or serious injury may occur if the caution or warning is not heeded.**

**Throughout the Parts & Hardware List, Part & Hardware Identifiers, and instructions are three-letter IDs. These IDs are below the images of the parts and hardware to help you locate and identify the parts and hardware during assembly. These IDs are not necessarily on the parts themselves.**



**ADZ** (x10)
1/4" x 5/8" Pan-Head Screw

## Level Surface Notice:

Surface must be leveled before installation. We recommend building a level work space with a concrete or patio style surface. If the surface is not properly leveled, the Outdoor Shed will not assemble correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.

## Building Code Notice:

Consult all local building codes, as well as city and county ordinances, to ensure that the construction of the Outdoor Shed does not require a building permit. Proper building permit documentation may be required in your neighborhood, and it would be unfortunate to learn this after constructing the Shed.

## Screwdriver Notice:

You may use a #2 Phillips head screwdriver bit and a power screwdriver or drill, instead of a hand screwdriver. However, be aware that the plastic pieces of your Shed can be damaged by overtightening of screws. To avoid damage we strongly recommend the use of a low-powered power screwdriver or a drill that has an adjustable clutch that is set on a low torque setting. If neither is available, use a hand screwdriver. In any case use caution to avoid overtightening the screws.

## Floor Puncture Notice:

Sharp objects may damage your floor. If resting sharp, heavy objects on your Shed floor, place a block of wood between the sharp object and floor.

## ⚠ CAUTION:

If more than six (6) inches of snow accumulate on the roof of the shed, carefully remove the snow to avoid possible roof collapse. While standing on the ground, remove the snow from the roof with a broom or snow shovel. Do not stand on the roof to remove snow.

***Snow Load Kit available from Customer Service for high snow areas.***

# PARTS & HARDWARE LIST

## BOX 1

| ID | Description | Qty |
|---|---|---|
| AGI | Right Gable | 2 |
| AGH | Left Gable | 2 |
| AGU | Outer Roof Panel A | 2 |
| AGV | Outer Roof Panel B | 2 |
| AGS | Outer Floor Panel A | 2 |
| AGT | Outer Floor Panel B | 2 |
| AGE | End Roof Cap | 2 |
| AFT | 14" x 30" Shelf | 2 |
| AFB | Door Brace | 8 |
| BLG | Extended Door Brace | 1 |
| BLI | Corner Frame Bracket | 2 |
| AFF | Gable Truss Brace | 2 |
| **BNM** | **METAL PARTS KIT 1** | |
| BLK | Left Hinge Assembly | 1 |
| BMG | Right Hinge Assembly | 1 |
| BKZ | Center Hinge Assembly | 1 |
| **BNN** | **METAL PARTS KIT 2** | |
| AFQ | Wall Support Channel | 6 |
| AFJ | Long Vertical Extension Channel | 2 |
| AFN | Short Vertical Extension Channel | 2 |
| AFH | Truss Gutter Channel | 2 |
| AFR | Corner Channel | 2 |
| AFG | Truss Brace Channel | 1 |
| BLH | Extended Door End Channel | 2 |
| AFP | Truss Support Strip | 2 |
| BLL | Long Glider Track | 1 |
| BLM | Short Glider Track | 1 |
| BLN | Glider Track Extension | 1 |

## BOX 2

| | | |
|---|---|---|
| AFY | Center Roof Cap | 2 |
| AGQ | Center Roof Panel | 3 |
| AHB | Roof Panel for Skylight | 1 |
| AHD | Wall Panel | 3 |
| AGB | Domed Skylight | 1 |
| AHH | Window Wall Panel | 1 |
| AHG | Window Frame | 2 |
| AGJ | Inner Floor Panel | 4 |
| AHF | Window | 2 |
| AFL | Roof Support Strip | 14 |
| **BNL** | **METAL PARTS KIT 1** | |
| AFP | Truss Support Strip | 4 |
| AFH | Truss Gutter Channel | 4 |
| AFG | Roof Truss Brace | 2 |
| **BNK** | **METAL PARTS KIT 2** | |
| AFQ | Wall Support Channel | 4 |
| **BNJ** | **HARDWARE BOX** | |
| **BNI** | **TRUSS FRAME & WALL SUPPORT INSTALLATION HARDWARE** | |
| ADZ | 1/4" x 5/8" Pan-Head Screw | 110 |
| ADJ | 1/4" Cap Nut | 20 |
| AAK | 1/4" x 1 1/2" Hex Bolt | 20 |
| AHT | Floor Bracket | 8 |
| ACD | #10 x 3/8" Flat-Head Screw | 4 |
| ADK | #10 Cap Nut | 4 |
| **BGV** | **TRUSS FRAME ASSEMBLY HARDWARE (x4)** | |
| AIP | Truss Connector | 1 |
| AAK | 1/4" x 1.5" Hex Bolt | 10 |
| ADJ | 1/4" Cap Nut | 10 |
| AHT | Floor Bracket | 2 |

| ID | Description | Qty |
|---|---|---|
| **BNH** | **GABLE BRACE & ROOF INSTALLATION HARDWARE** | |
| ADZ | 1/4" x 5/8" Pan-Head Screw | 185 |
| AED | #10 x 1" Fender Washer | 16 |
| ACJ | #10 x 5/8" Pan-Head Screw | 16 |
| AJA | Foam Cube | 20 |
| ADX | #10 x 1/2" Pan-Head Screw | 4 |
| ACF | #10 x 5/16" Pan-Head Screw | 1 |
| ADK | #10 Cap Nut | 1 |

## BOX 3

| | | |
|---|---|---|
| AFY | Center Roof Cap | 1 |
| AGQ | Center Roof Panel | 1 |
| AHB | Roof Panel for Skylight | 1 |
| AGB | Domed Skylight | 1 |
| AHH | Window Wall Panel | 1 |
| AHD | Wall Panel | 1 |
| AHG | Window Frame | 2 |
| AGJ | Inner Floor Panel | 2 |
| AHF | Window | 2 |
| AFL | Roof Support Strip | 6 |
| **BNG** | **METAL PARTS KIT 1** | |
| AFG | Roof Truss Brace | 1 |
| AFH | Truss Gutter Channel | 2 |
| **BNF** | **METAL PARTS KIT 2** | |
| AFP | Truss Support Strip | 2 |
| AFQ | Wall Support Channel | 2 |
| **BNB** | **HARDWARE BOX** | |
| **BGU** | **WINDOW ASSEMBLY & INSTALLATION HARDWARE (x2)** | |
| ADZ | 1/4" x 5/8" Pan-Head Screw | 4 |
| ADW | #10 x 3/4" Pan-Head Screw | 4 |
| ADX | #10 x 1/2" Pan-Head Screw | 22 |
| AEE | #10 x 1/2" Flat Washer | 2 |
| ACF | #10 x 5/16" Pan-Head Screw | 2 |
| ACB | #10 x 1 1/4" Pan-Head Screw | 4 |
| ADK | #10 Cap Nut | 2 |
| ACD | #10 x 3/8" Flat Head Screw | 2 |
| AIV | Window Stay Bracket | 2 |
| AIE | Mounted Window Stay | 2 |
| AIN | Sliding Window Stay | 2 |
| AIR | Window Hinge | 4 |
| AIT | Window Latch | 4 |
| AIU | Window Latch Bearing | 4 |
| **BEC** | **DOMED SKYLIGHT ASSEMBLY HARDWARE (x2)** | |
| ACR | #10 x 5/8" Carriage Bolt | 12 |
| AEE | #10 x 1/2" Flat Washer | 12 |
| ADK | #10 Cap Nut | 12 |
| AHI | Butyl Tape | 1 |

## BOX 4

| | | |
|---|---|---|
| AHD | Wall Panel | 6 |
| BLJ | Corner Door Frame | 2 |
| AQX | Corner Trim | 4 |
| **BNO** | **Parts & Hardware Box** | |
| AHA | Roof Cap Cover | 2 |
| AFU | Pegboard Strip | 2 |
| AIZ | 14" Shelf Bracket | 4 |
| **BHC** | **PEGBOARD STRIP INSTALLATION HARDWARE** | |
| ADW | #10 x 3/4" Pan-Head Screw | 10 |
| **BHD** | **Tool Clip Assortment** | |
| AIH | Pegboard J-Hook | 3 |
| AII | Pegboard L-Hook | 3 |
| AIJ | Pegboard Toolholder | 2 |
| AIF | Pegboard 2" Double Arm Hook | 1 |
| AIG | Pegboard 4' Double Arm Hook | 1 |

# PARTS & HARDWARE LIST (CONT.)

| ID | Description | Qty |
|---|---|---|
| ***BNA*** | ***GABLE ASSEMBLY HARDWARE (x2)*** | |
| AGP | Louvered Vent | 1 |
| AIQ | Vent Screen | 1 |
| ADW | #10 x 3/4" Pan-Head Screw | 5 |
| AEE | #10 x 1/2" Flat Washer | 5 |
| ADZ | 1/4" x 5/8" Pan-Head Screw | 4 |
| ***BMZ*** | ***GABLE INSTALLATION HARDWARE*** | |
| ADZ | 1/4" x 5/8" Pan-Head Screw | 30 |
| ***BMX*** | ***WALL INSTALLATION HARDWARE*** | |
| ADZ | 1/4" x 5/8" Pan-Head Screw | 116 |
| ADC | #2 Phillips Bit | 1 |
| ***BMY*** | ***14" SHELF INSTALLATION HARDWARE (x2)*** | |
| ADX | #10 x 1/2" Pan-Head Screw | 4 |
| AEE | #10 x 1/2" Flat Washer | 4 |
| ***BMW*** | ***LEFT DOOR HARDWARE*** | |
| ADZ | 1/4" x 5/8" Pan-Head Screw | 9 |
| ABU | 1/4" x 1 1/2" Carriage Bolt | 2 |
| ADJ | 1/4" Cap Nut | 2 |
| AHM | Deadbolt Latch | 2 |
| AEB | 1/4" Flat Washer | 2 |
| ***BMV*** | ***CENTER DOOR HARDWARE*** | |
| ADW | #10 x 3/4" Pan-Head Screw | 3 |
| ADX | #10 x 1/2" Pan-Head Screw | 2 |
| AEE | #10 x 1/2" Flat Washer | 1 |
| BLA | Inside Handle | 1 |
| AHZ | Center Handle | 1 |
| BQP | 1/4" x 1 1/4" Carriage Bolt | 2 |
| ADJ | 1/4" Cap Nut | 2 |
| AIA | Center Door Lock Bracket | 1 |
| AIB | Center Door Extended Strike Plate | 1 |
| ADZ | 1/4" x 5/8" Pan-Head Screw | 9 |
| AHM | Deadbolt Latch | 1 |
| BBH | End Plug | 2 |
| ***BMU*** | ***RIGHT DOOR HARDWARE*** | |
| ADZ | 1/4" x 5/8" Pan-Head Screw | 9 |
| AEE | #10 x 1/2" Flat Washer | 3 |
| ADW | #10 x 3/4" Pan-Head Screw | 4 |
| BQQ | 1/4" x 2 1/4" Carriage Bolt | 2 |
| AHY | Latch Spring | 1 |
| AHW | Thumb Lever Extension | 1 |
| AEB | 1/4" Flat Washer | 2 |
| ADJ | 1/4" Cap Nut | 2 |
| ADB | 3/8" x .64" Steel Spacer | 2 |
| AIL | Right Door Lock Bracket | 1 |
| AHV | Extended Door Latch | 1 |
| AHX | Latch Cover Plate | 1 |
| AIO | Thumb Lever | 1 |
| AIK | Right Handle | 1 |
| ***BND*** | ***TRIM INSTALLATION HARDWARE*** | |
| ACK | #8 x 1" Pan-Head Screw | 4 |
| ADX | #10 x 1/2" Pan-Head Screw | 34 |
| AGA | Black, Plastic Corner Trim Bracket | 12 |
| BMH | Metal Corner Trim Bracket | 10 |

| ID | Description | Qty |
|---|---|---|
| ***BNE*** | ***DOOR FRAME & DOOR INSTALLATION HARDWARE*** | |
| ADX | #10 x 1/2" Pan-Head Screw | 4 |
| ACA | 1/4" x 1/2" Carriage Bolt | 8 |
| ADJ | 1/4" Cap Nut | 16 |
| ADZ | 1/4" x 5/8" Pan-Head Screw | 13 |
| AEB | 1/4" Flat Washer | 8 |
| BBE | Glider Wheel | 2 |
| BBF | 1/4" x 5x16" x 1/2" Shoulder Screw | 2 |
| ABU | 1/4" x 1 1/2" Carriage Bolt | 6 |
| BBG | 5/16" x 2 1/2" Hex Bolt | 1 |
| AAV | 5/16" Jam Nut | 2 |
| BBJ | 4" Floor Strike Plate | 1 |
| BBK | Carriage Bracket | 1 |
| BBL | 1/4" x 3/4" Hex Bolt | 6 |
| BBM | 1/4" x 1/2" Thread-Cutting Screw | 4 |
| BBN | Carriage Latch | 1 |
| AHL | Dead Bolt Strike Plate | 2 |
| CJR | Door Frame Support Bracket | 2 |
| AID | L-Key with Phillips Head | 1 |
| ***BNC*** | ***DOOR WINDOW INSTALLATION HARDWARE*** | |
| ADZ | 1/4" x 5/8" Pan-Head Screw | 39 |

## *BOX 5*

| | | |
|---|---|---|
| AGZ | Right & Center Door | 2 |
| AGO | Left Door | 1 |
| BLO | Door Window | 3 |

***Note: Throughout the Parts & Hardware List, Part & Hardware Identifiers, and instructions are three-letter IDs. These IDs are below the images of the parts and hardware to help you locate and identify the parts and hardware during assembly. These IDs are not necessarily on the parts themselves.***

# PARTS & HARDWARE IDENTIFIER

## BOX 1

Parts shown at 8% of actual size

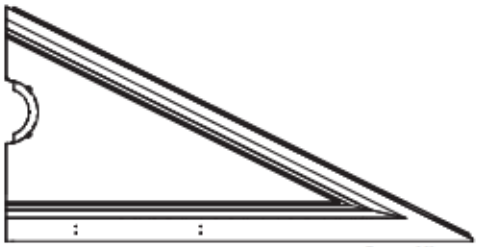


**AGH** (x2)
Left Gable

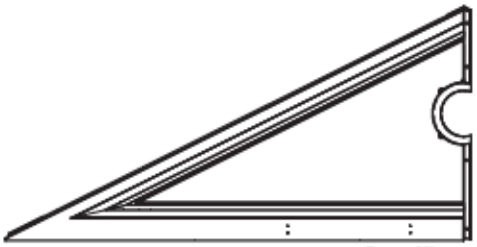


**AGI** (x2)
Right Gable

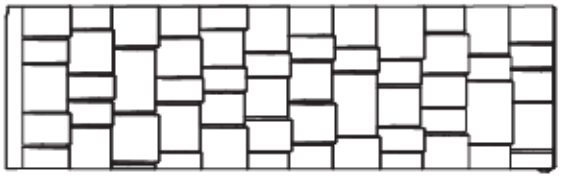

**AGU** (x2)
Outer Roof Panel A

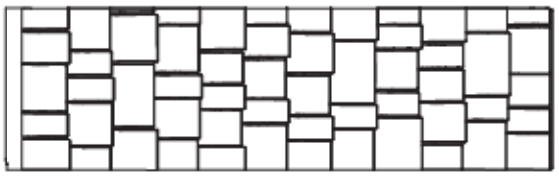

**AGV** (x2)
Outer Roof Panel B



**AGS** (x2)
Outer Floor Panel A



**AGT** (x2)
Outer Floor Panel B




**AFB** (x8)
Door Brace



**BLG** (x1)
Extended Door Brace




**AFF** (x2)
Gable Truss Brace

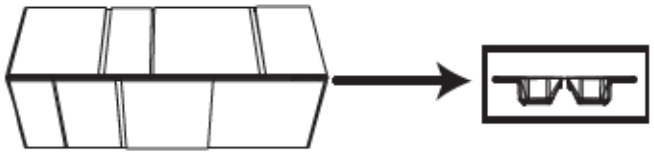

**AGE** (x2)
End Roof Cap

Part shown at 15% of actual size

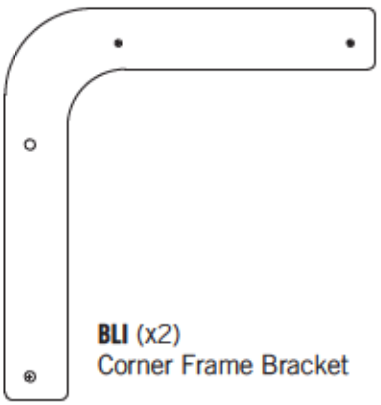

**BLI** (x2)
Corner Frame Bracket

Part shown at 4% of actual size

**AFT** (x2)
14" x 30" Shelf

# BOX 1 (CONT.)

## METAL PARTS KIT 1 [BNM]

Parts shown at 8% of actual size



**BKZ** (x1)
Center Hinge Assembly

**Top** **Bottom**



**BMG** (x1)
Right Hinge Assembly

**Top** **Bottom**






**BLK** (x1)
Left Hinge Assembly

## METAL PARTS KIT 2 [BNN]

Parts shown at 8% of actual size






**AFQ** (x6)
Wall Support Channel







**AFJ** (x2)
Long Vertical Extension Channel

**AFN** (x2)
Short Vertical Extension Channel






**AFH** (x2)
Truss Gutter Channel






**AFR** (x2)
Corner Channel



**AFG** (x1)
Truss Brace Channel

## BOX 1 (CONT.)

Parts shown at 8% of actual size

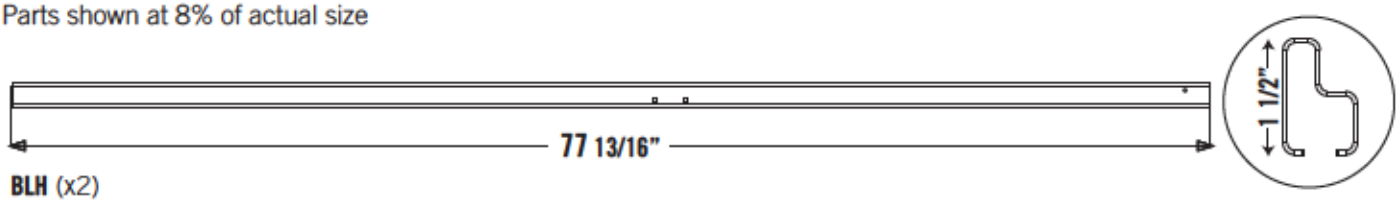


**BLH** (x2)
Extended Door End Channel




**AFP** (x2)
Truss Support Strip






**BLM** (x1)
Short Glider Track






**BLL** (x1)
Long Glider Track

**BLN** (x1)
Glider Track Channel

## BOX 2

Parts shown at 4% of actual size

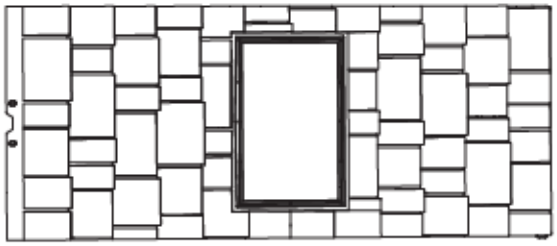

**AHB** (x1)
Roof Panel for Skylight

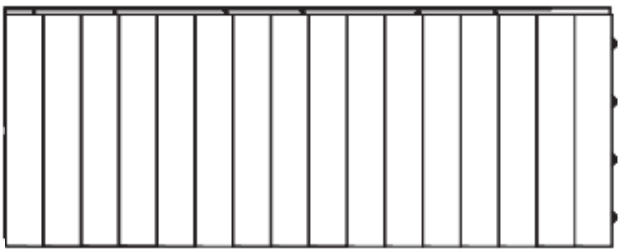

**AHD** (x3)
Wall Panel

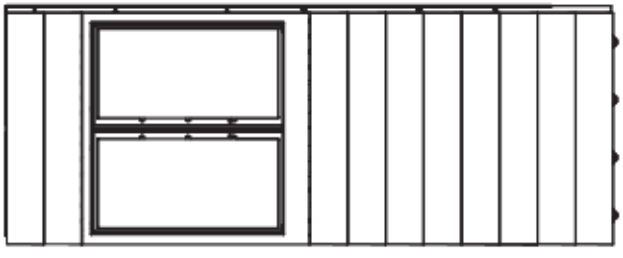

**AHH** (x1)
Window Wall Panel

**AGJ** (x4)
Inner Floor Panel

# PARTS & HARDWARE IDENTIFIER

## BOX 2

Parts shown at 4% of actual size

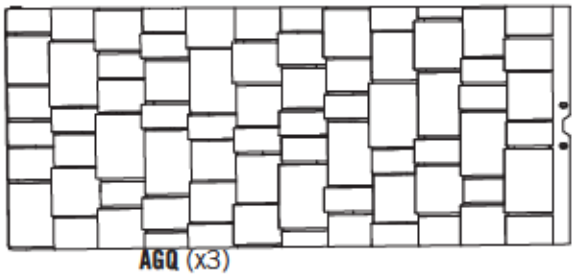

**AGQ** (x3)
Center Roof Panel




**AFL** (x14)
Roof Support Strip

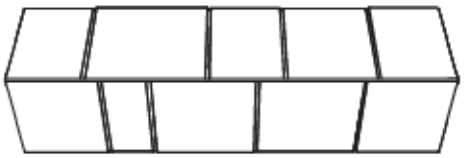

**AFY** (x2)
Center Roof Cap

Parts shown at 8% of actual size

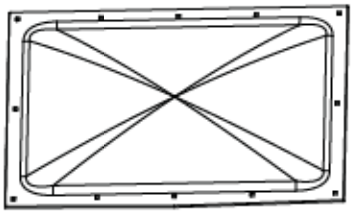

**AGB** (x1)
Domed Skylight

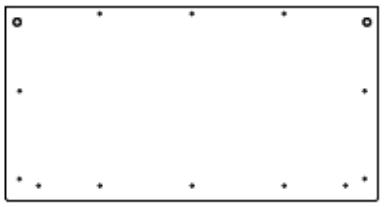

**AHF** (x2)
Window

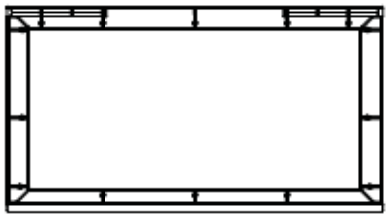

**AHG** (x2)
Window Frame

## METAL PARTS KIT 1 [BNL]

Parts shown at 8% of actual size






**AFH** (x4)
Truss Gutter Channel



**AFG** (x2)
Roof Truss Brace




**AFP** (x4)
Truss Support Strip

## METAL PARTS KIT 2 [BNK]

Part shown at 8% of actual size






**AFQ** (x4)
Wall Support Channel

# BOX 2 (CONT.)

## HARDWARE BOX [BNJ]

### TRUSS FRAME & WALL SUPPORT INSTALLATION HARDWARE [BNI]

Hardware shown at actual size (*Unless otherwise noted)

**ADZ** (x110)
1/4" x 5/8" Pan-Head Screw

**ADJ** (x20)
1/4" Cap Nut



**AAK** (x20)
1/4" x 1 1/2" Hex Bolt

**AHT** (x8)*
Floor Bracket



**ACD** (x4)
#10 x 3/8" Flat-Head Screw

**ADK** (x4)
#10 Cap Nut

### TRUSS FRAME ASSEMBLY HARDWARE [BGV] (x4)

Hardware shown at actual size (*Unless otherwise noted)



**AAK** (x10)
1/4" x 1 1/2" Hex Bolt

**ADJ** (x10)
1/4" Cap Nut

**AHT** (x2)*
Floor Bracket



**AIP** (x1)*
Truss Connector

### GABLE BRACE & ROOF INSTALLATION HARDWARE [BNH]

Hardware shown at actual size (*Unless otherwise noted)



**ADZ** (x185)
1/4" x 5/8" Pan-Head Screw
(Not all are used)

**ADX** (x4)
#10 x 1/2" Pan-Head Screw



**AED** (x16)
#10 x 1" Fender Washer

**ACF** (x1)
#10 x 5/16" Pan-Head Screw

**ACJ** (x16)
#10 x 5/8" Pan-Head Screw

**ADK** (x1)
#10 Cap Nut

**AJA** (x20)*
Foam Cube

## BOX 3

Parts shown at 4% of actual size

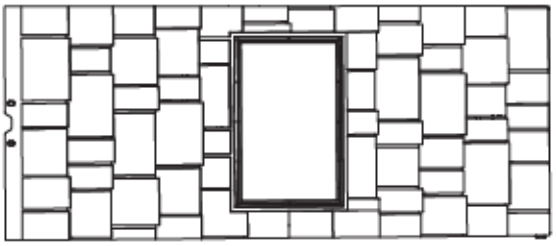

**AHB** (x1)
Roof Panel for Skylight

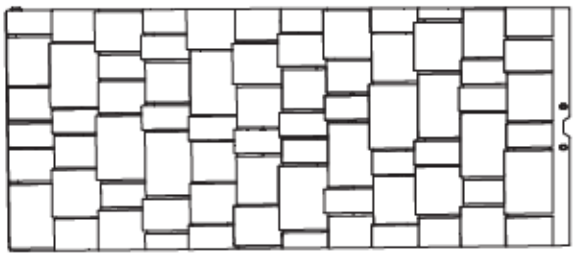

**AGQ** (x1)
Center Roof Panel

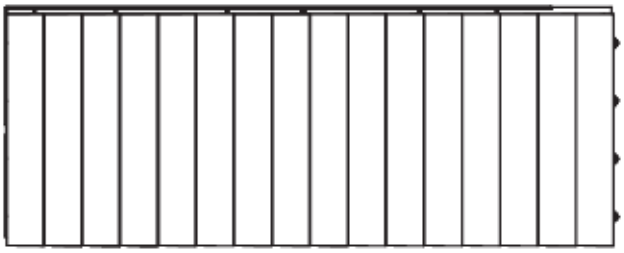

**AHD** (x1)
Wall Panel

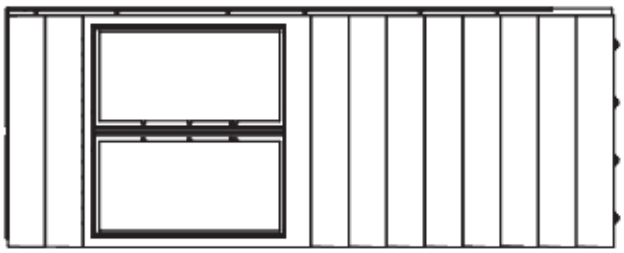

**AHH** (x1)
Window Wall Panel

**AGJ** (x2)
Inner Floor Panel

Parts shown at 8% of actual size

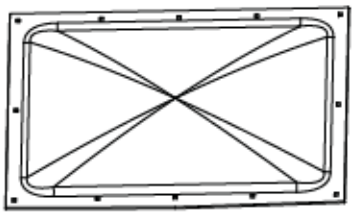

**AGB** (x1)
Domed Skylight

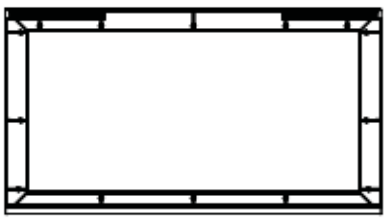

**AHG** (x2)
Window Frame

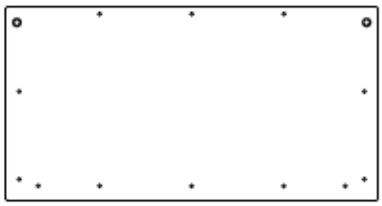

**AHF** (x2)
Window

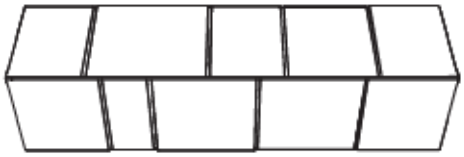

**AFY** (x1)
Center Roof Cap




**AFL** (x6)
Roof Support Strip

## BOX 3 (CONT.)

### METAL PARTS KIT 1 [BNG]

Parts shown at 8% of actual size






**AFH** (x2)
Truss Gutter Channel



**AFG** (x1)
Roof Truss Brace

### METAL PARTS KIT 2 [BNF]

Part shown at 8% of actual size






**AFQ** (x2)
Wall Support Channel




**AFP** (x2)
Truss Support Strip

### HARDWARE BOX [BNB]

#### WINDOW ASSEMBLY & INSTALLATION HARDWARE [BGU] (x2)

Hardware shown at actual size



**ADZ** (x4)
1/4" x 5/8" Pan-Head Screw

**ADW** (x4)
#10 x 3/4" Pan-Head Screw

**ADX** (x22)
#10 x 1/2" Pan-Head Screw

**AEE** (x2)
#10 x 1/2" Flat Washer

**ACF** (x2)
#10 x 5/16" Pan-Head Screw

**ACB** (x4)
#10 x 1 1/4" Pan-Head Screw



**ACD** (x2)
#10 x 3/8" Flat-Head Screw
(Not used in this model)

**ADK** (x2)
#10 Cap Nut
(Not used in this model)

## BOX 3 (CONT.)

### WINDOW ASSEMBLY & INSTALLATION HARDWARE [BGU] (x2) (CONT.)

Parts shown at 25% of actual size

**AIR** (x4)
Window Hinge

**AIE** (x2)
Mounted Window Stay

**AIN** (x2)
Sliding Window Stay

**AIV** (x2)
Window Stay Bracket

Parts shown at 50% of actual size



**AIU** (x4)
Window Latch Bearing

**AIT** (x4)
Window Latch

### DOMED SKYLIGHT ASSEMBLY HARDWARE BAG [BEC] (x2)

Hardware shown at actual size (*unless otherwise noted)



**ACR** (x12)
#10 x 5/8" Carriage Bolt

**ADK** (x12)
#10 Cap Nut

**AEE** (x12)
#10 x 1/2" Flat Washer

**AHI** (x1)
Butyl Tape

## BOX 4

Part shown at 4% of actual size

**AHD** (x6)
Wall Panel

Part shown at 4% of actual size

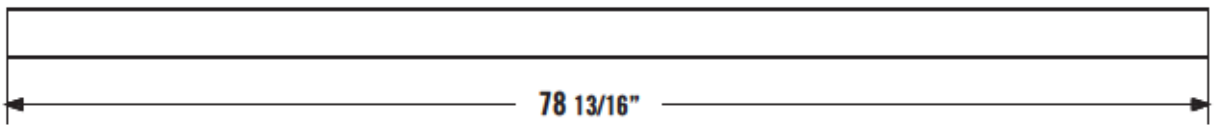




**AQX** (x4)
Corner Trim

**BLJ** (x2)
Corner Door Frame

# BOX 4 (CONT.)

## PARTS & HARDWARE BOX [BNO]

Parts shown at 15% of actual size



**AHA** (x2)
Roof Cap Cover



**AFU** (x2)
Pegboard Strip

**AIZ** (x4)
14" Shelf Bracket

## PEGBOARD STRIP INSTALLATION HARDWARE [BHC]

Hardware shown at actual size

**ADW** (x10)
#10 x 3/4" Pan-Head Screw

## *TOOL CLIP ASSORTMENT [BHD]*

Parts shown at 50% of actual size



**AIJ** (x2)
Toolholder

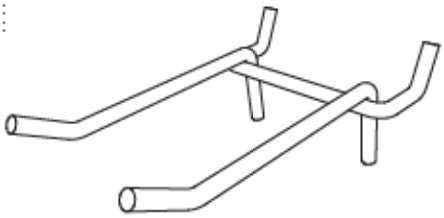

**AIF** (x1)
2" Double-Arm Hook

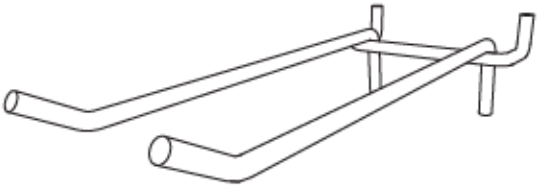

**AIG** (x1)
4" Double-Arm Hook

**AIH** (x3)
J-Hook



**AII** (x3)
L-Hook

## GABLE ASSEMBLY HARDWARE [BNA] (x2)

Hardware shown at actual size

**ADW** (x5)
#10 x 3/4" Pan-Head Screw

**AEE** (x5)
#10 x 1/2" Flat Washer



**ADZ** (x4)
1/4" x 5/8" Pan-Head Screw



**AGP** (x1)
Louvered Vent



**AIQ** (x1)
Vent Screen

## BOX 4 (CONT.)

### GABLE INSTALLATION HARDWARE [BMZ]

Hardware shown at actual size



**ADZ** (x30)
1/4" x 5/8" Pan-Head Screw

### WALL INSTALLATION HARDWARE [BMX]

Hardware shown at actual size



**ADZ** (x116)
1/4" x 5/8" Pan-Head Screw

**ADC** (x1)
#2 Phillips Bit

### 14" SHELF INSTALLATION HARDWARE [BMY] (x2)

Hardware shown at actual size

**ADX** (x4)
#10 x 1/2" Pan-Head Screw

**AEE** (x4)
#10 x 1/2" Flat Washer

### LEFT DOOR HARDWARE [BMW]

Hardware shown at actual size (*Unless otherwise noted)



**ADZ** (x9)
1/4" x 5/8" Pan-Head Screw

**ABU** (x2)
1/4" x 1 1/2" Carriage Bolt

**ADJ** (x2)
1/4" Cap Nut

**AHM** (x2)
Dead Bolt Latch



**AEB** (x2)
1/4" Flat Washer

## BOX 4 (CONT.)

### CENTER DOOR HARDWARE [BMV]

Hardware shown at actual size

**ADW** (x3)
#10 x 3/4" Pan-Head Screw

**AEE** (x1)
#10 x 1/2" Flat Washer

**ADX** (x2)
#10 x 1/2" Pan-Head Screw

**ADJ** (x2)
1/4" Cap Nut



**BQP** (x2)
1/4" x 1 1/4" Carriage Bolt



**ADZ** (x9)
1/4" x 5/8" Pan-Head Screw



**BBH** (x2)
End Plug

Hardware shown at 50% of actual size



**BBI** (x1)
Inside Handle

Hardware shown at 15% of actual size

**AHZ** (x1)
Center Handle

Hardware shown at 25% of actual size

**AIA** (x1)
Center Door Lock Bracket

**AHM** (x1)
Dead Bolt Latch

**AIB** (x1)
Center Door Extended Strike Plate

### RIGHT DOOR HARDWARE [BMU]

Hardware shown at actual size



**ADZ** (x9)
1/4" x 5/8" Pan-Head Screw

**AEE** (x3)
#10 x 1/2" Flat Washer

**ADW** (x4)
#10 x 3/4" Pan-Head Screw

**AEB** (x2)
1/4" Flat Washer



**BQQ** (x2)
1/4" x 2 1/4" Carriage Bolt

**ADB** (x2)
3/8" x .64 Steel Spacer



**AHY** (x1)
Latch Spring

**ADJ** (x2)
1/4" Cap Nut

Parts shown at 25% of actual size

**AHV** (x1)
Extended Door Latch



**AHX** (x1)
Latch Cover Plate



**AIL** (x1)
Right Door Lock Bracket



**AIO** (x1)
Thumb Lever

# BOX 4 (CONT.)

## RIGHT DOOR HARDWARE [BMU] (CONT.)

Hardware shown at 15% of actual size



**AIK** (x1)
Right Door Handle

Hardware shown at 50% of actual size



**AHW** (x1)
Thumb Lever Extension

## TRIM INSTALLATION HARDWARE [BND]

Hardware shown at actual size

**ADX** (x34)
#10 x 1/2" Pan-Head Screw

**ACK** (x4)
#8 x 1" Pan-Head Screw

Hardware shown at 25% of actual size



**AGA** (x12)
Black, Plastic Corner Trim Bracket

**BMH** (x10)
Metal Corner Trim Bracket

## DOOR FRAME & DOOR INSTALLATION HARDWARE [BNE]

Hardware shown at actual size

**ADX** (x4)
#10 x 1/2" Pan-Head Screw



**ACA** (x8)
1/4" X 1/2" Carriage Bolt

**ADJ** (x16)
1/4" Cap Nut



**ADZ** (x13)
1/4" x 5/8" Pan-Head Screw



**AEB** (x8)
1/4" Flat Washer



**BBF** (x2)
1/4" x5/16" x 1/2" Shoulder Screw

**ABU** (x6)
1/4" x 1 1/2" Carriage Bolt

**AAV** (x2)
5/16" Jam Nut



**BBG** (x1)
5/16" x 2 1/2" Hex Bolt



**BBM** (x4)
1/4" x 1/2" Thread Cutting Screw



**BBL** (x6)
1/4" x 3/4" Hex Bolt

**AID** (x1)
L-Key with Phillips Head

Hardware shown at 50% of actual size

**BBJ** (x1)
4" Floor Strike Plate

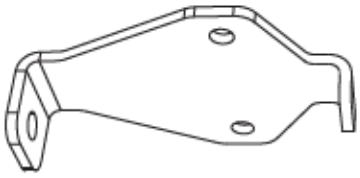

**BBK** (x1)
Carriage Bracket



**AHL** (x2)
Dead Bolt Strike Plate

**BBE** (x2)
Glider Wheel

## BOX 4 (CONT.)

### DOOR FRAME & DOOR INSTALLATION HARDWARE [BNE] (CONT.)

Hardware shown at 50% of actual size



**CJR** (x2)
Door Frame Support Bracket

Hardware shown at 25% of actual size



**BBN** (x1)
Carriage Latch

### DOOR WINDOW INSTALLATION HARDWARE [BNC]

Hardware shown at actual size



**ADZ** (x39)
1/4" x 5/8" Pan-Head Screw

## BOX 5

Parts shown at 4% of actual size

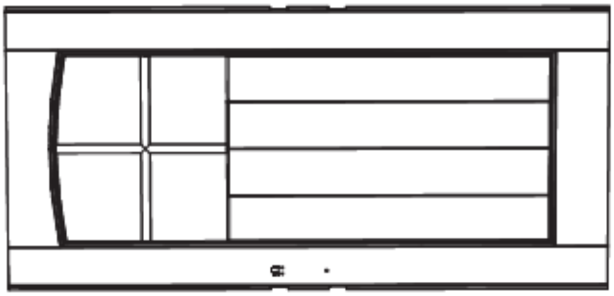

**AGZ** (x2)
Right & Center Doors

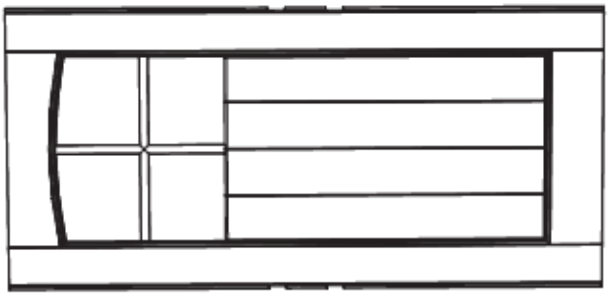

**AGO** (x1)
Left Door



**BLO** (x3)
Door Window

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

Concrete (1 cu. yd.)

SEC 1

SEC 1.1

## SITE PREPARATION - CONCRETE PLATFORM PREPARATION

The actual dimensions of your shed (at its widest and longest points) are 11' x 11'. Be sure to select a site that will accommodate these measurements. The base of the shed is slightly smaller than this, so you will need to create a level surface that is 123 1/2" x 123 1/2"". The floor of the shed will have a slight overhang to help prevent water from pooling under the floor. We recommend using a level concrete or patio style surface. This will provide the best long-term performance for your shed.

! *Note: Shed Extension Kits are available for this shed. Please consider possible shed expansion when planning the site for your shed. See inside the back cover of this manual for information on ordering Extension Kits.*

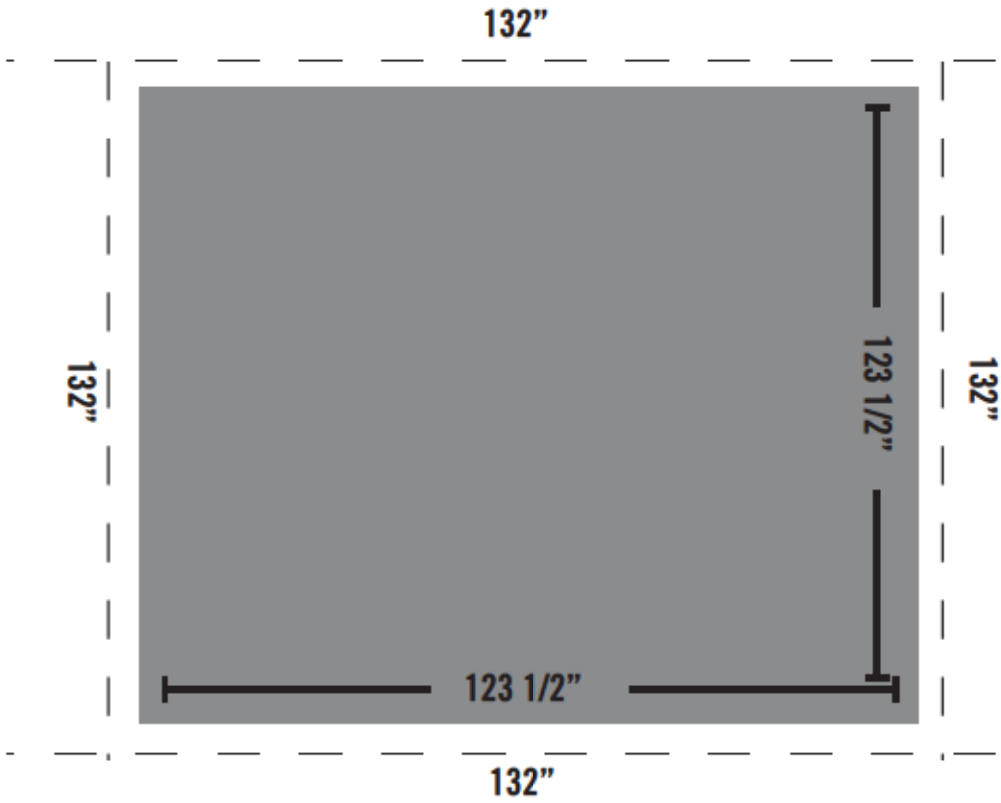


! *Note: Surface must be leveled before installation. If the surface is not properly leveled, the Outdoor Shed will not assemble or function correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.*

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**2" x 4" x 123 1/2"** (x2)

**2" x 4" x 120 1/2"** (x9)



**16d 3" Common Nail** (x36)

SEC 1

SEC 1.2

## ALTERNATIVE SITE PREPARATION: OPTION 1 - WOOD PLATFORM ASSEMBLY

Ensure you use lumber that is treated and approved for **outdoor** use. Build outside frame to 123 1/2" by 123 1/2" outside dimensions.

***Note: All lumber must be rated for outdoor use.***

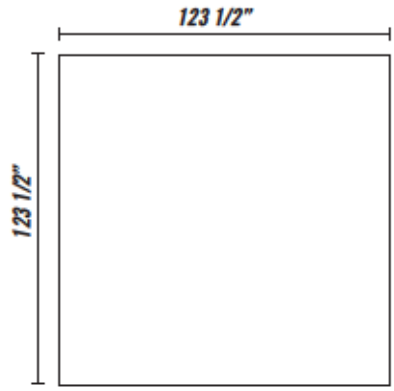


To ensure studs are in the correct location for nailing to plywood in the next step, start measuring here, and then measure from center to center.

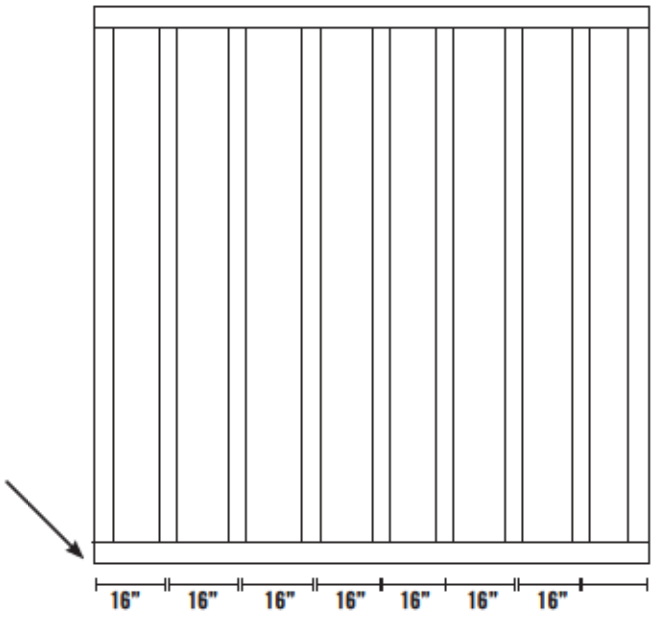


***Note: Surface must be leveled before installation. If the surface is not properly leveled, the Outdoor Shed will not assemble or function correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.***

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**48" x 96" x 3/4" Treated Plywood** (x2)

**27 1/2" x 96" x 3/4" Treated Plywood** (x2)



**8d 1 1/2" Common Nail** (x63)

**27 1/2" x 27 1/2" x 3/4" Treated Plywood** (x1)

SEC 1

SEC 1.3

### ALTERNATIVE SITE PREPARATION: OPTION 1 - WOOD PLATFORM ASSEMBLY (CONT)

Square up the frame by measuring from corner to corner. Measurement A should equal Measurement B.

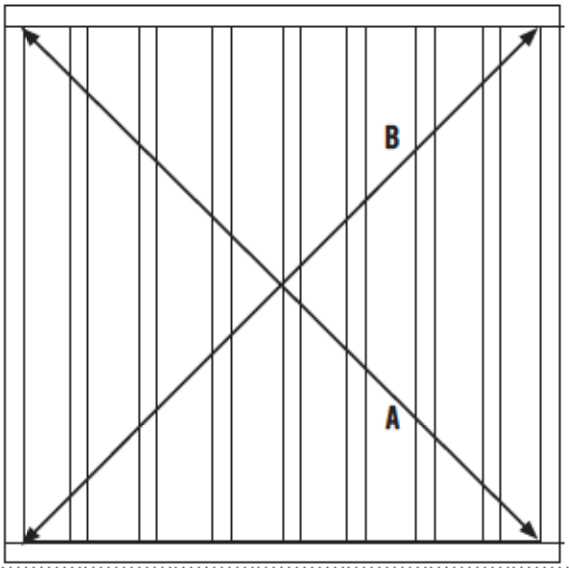


! *Note: All lumber must be rated for outdoor use.*

SEC 1.4

Cut Plywood into sizes called for on previous page. Arrange the Plywood according to the diagram and nail into place with 8d x 1 1/2" nails. Place platform in the desired location. If platform does not rest level on the ground, build up low points with loose dirt until platform is stable.

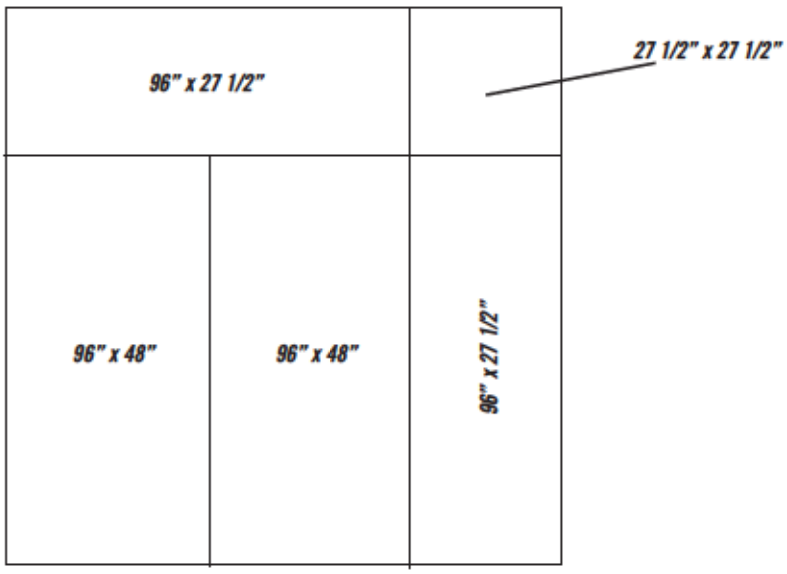

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 1

**2" x 4" x 123 1/2"** (x2)

**2" x 6" x 117"** (x2)

**L-Bracket** (x4)



**8d 1 1/2" Common Nail** (x16)

**Pea Gravel** (13.4 Cubic Feet)

## SEC 1.5 ALTERNATIVE SITE PREPARATION: OPTION 2 - FILLED WOOD FRAME ASSEMBLY

Cut outside frame to 123 1/2" by 123 1/2" outside dimensions. Lay boards flat so widest part faces up. Ensure frame is level. Square up the frame by measuring from corner to corner. Measurement A should equal Measurement B. Nail an L-Bracket on each corner of the frame with 8d nails. Place platform in the desired location. If platform does not rest level on the ground, build up low points with loose dirt or "Pea" gravel, until platform is stable.

! *Note: Whenever possible you should use the surfaces described on Page 7.*

! *Note: All lumber must be rated for outdoor use.*

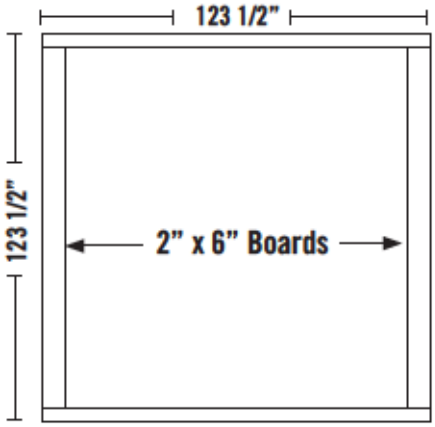


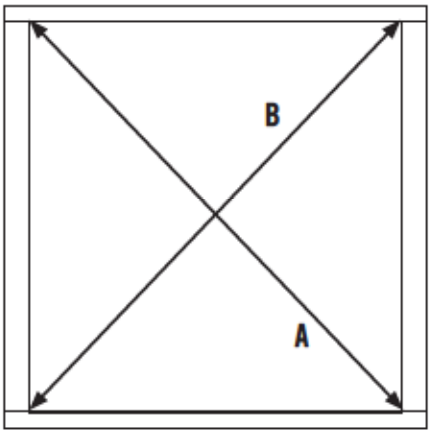


## SEC 1.6

Once all boards are level and do not wobble, pack "Pea" gravel around the outside of the frame, and slope away from frame.

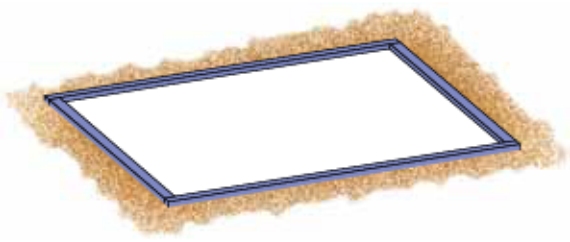

## SEC 1.7

Now fill the inside of the frame with "Pea" gravel. Use a leveling board to scrape off extra fill material and to level the surface.

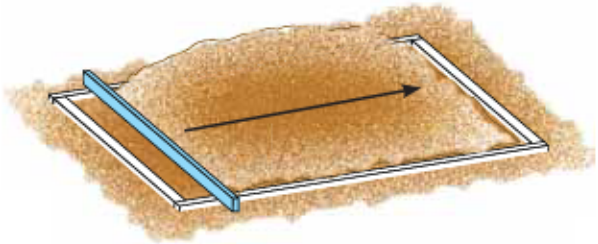

2" x 4" x 11' Leveling Board (x1)

# SEC 2 FLOOR ASSEMBLY

## PLASTIC PARTS REQUIRED — LOCATED IN BOXES: 1, 2, 3

Parts shown at 4% of actual size



**AGS** (x2)
Outer Floor Panel A



**AGT** (x2)
Outer Floor Panel B

**AGJ** (x6)
Inner Floor Panel

## TOOLS REQUIRED

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 2

**NO HARDWARE REQUIRED FOR THIS PAGE**

SEC 2.1

### FLOOR PANEL ASSEMBLY

Hold one (1) **Outer Floor Panel "B" (AGT)** at an angle against one (1) **Outer Floor Panel "A" (AGS)** so the tabs on Panel "B" fit underneath Panel "A", and the tabs on Panel A fit underneath Panel "B". Then, lay Panel "B" flat.

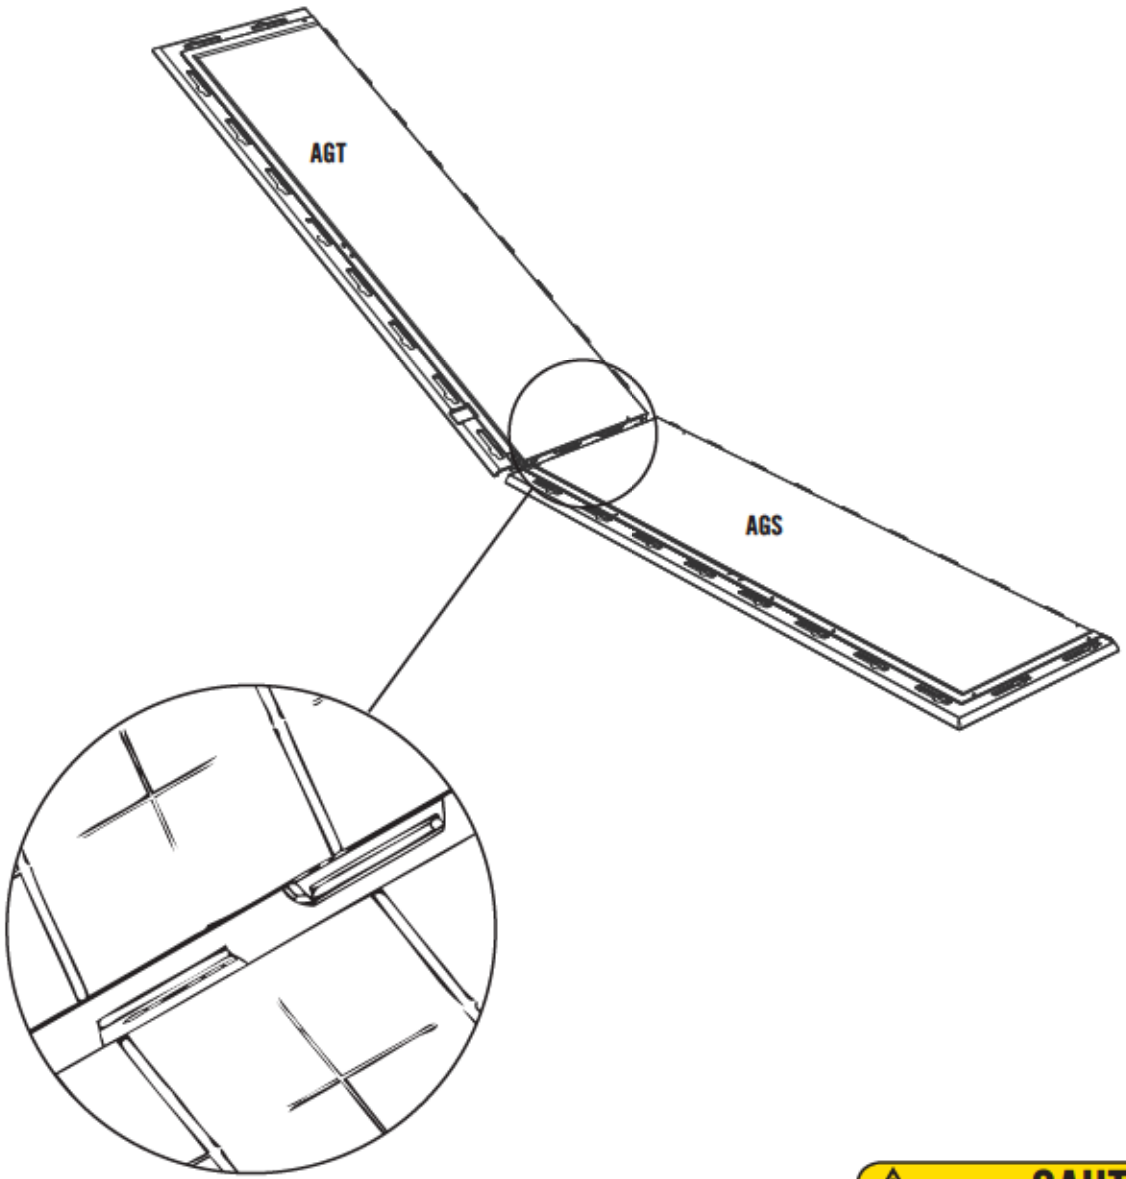


**⚠ CAUTION**

Sharp objects may damage your floor. If resting sharp, heavy objects on your shed floor, place a block of wood between the sharp object and floor.

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 2

**NO HARDWARE REQUIRED FOR THIS PAGE**

**SEC 2.2**

Hold an **Inner Floor Panel (AGJ)** at an angle against another Inner Floor Panel so the tabs on each Panel fit underneath the other Panel. Then, lay the Panel flat. Connect the Inner Floor Panels to the Outer Floor Panels using the same procedure.

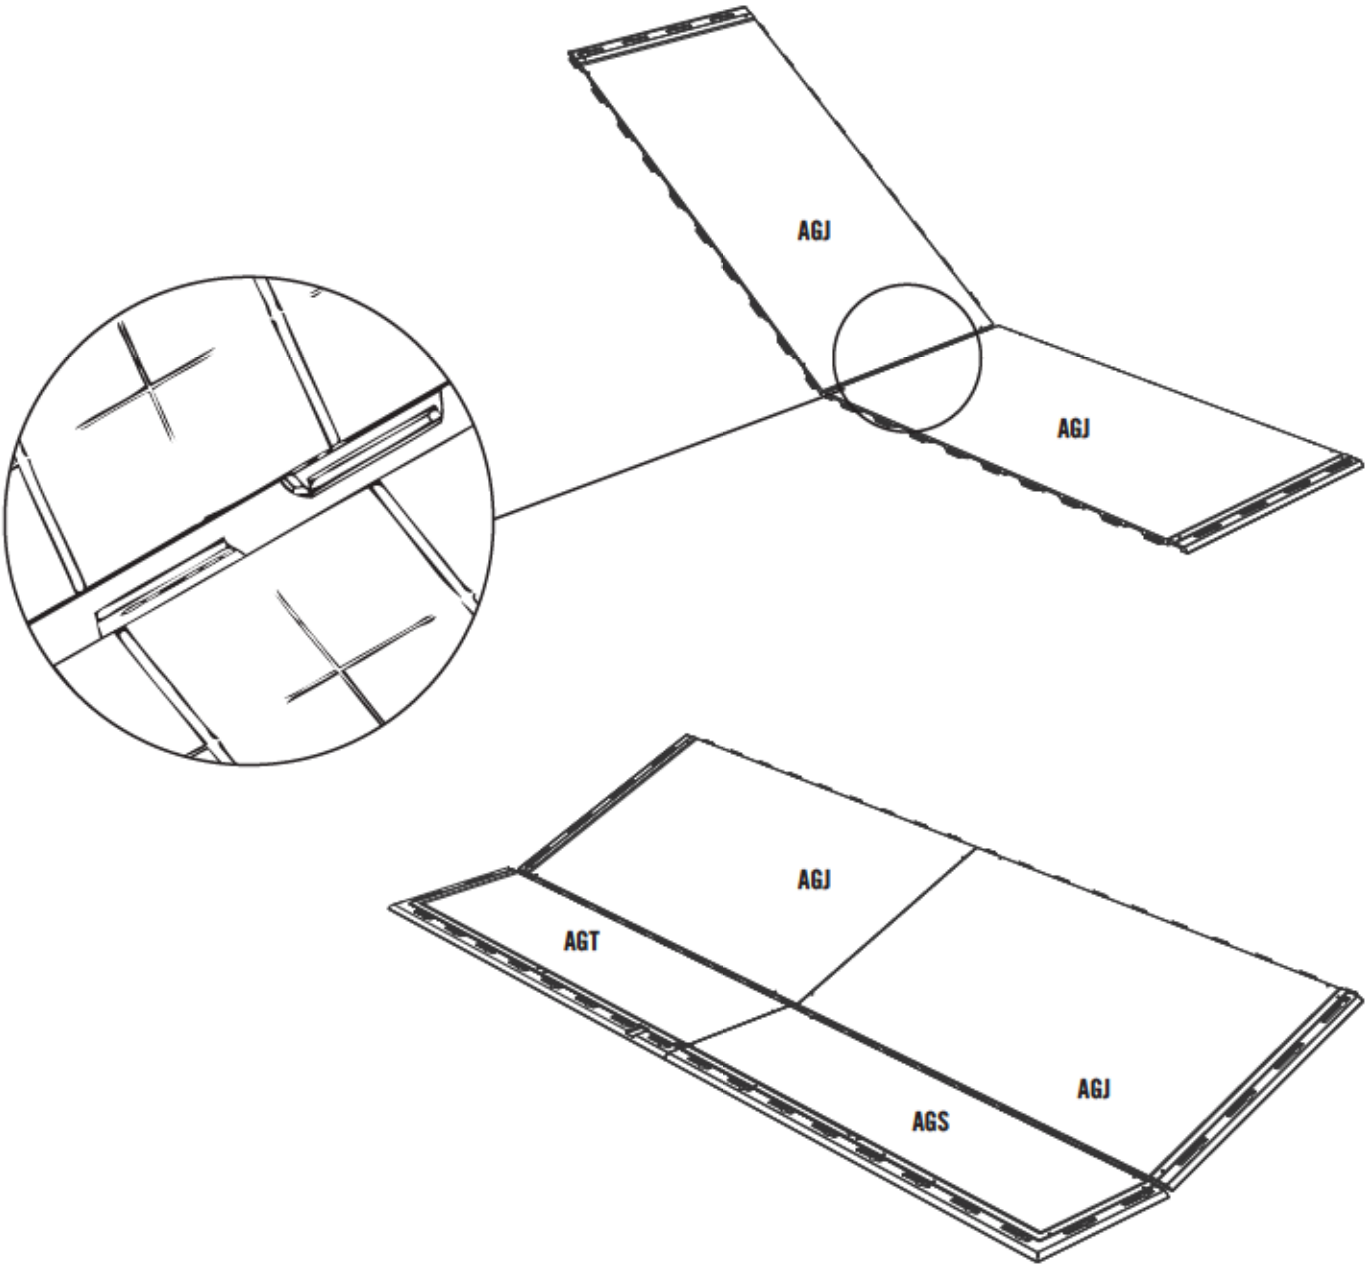

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 2

**NO HARDWARE REQUIRED FOR THIS PAGE**

**SEC 2.3**

Repeat the previous step to connect all the **Inner Floor Panels (AGJ)** to each other. Finally, connect the last two **Outer Floor Panels (AGS & AGT)** to the Inner Floor Panels.

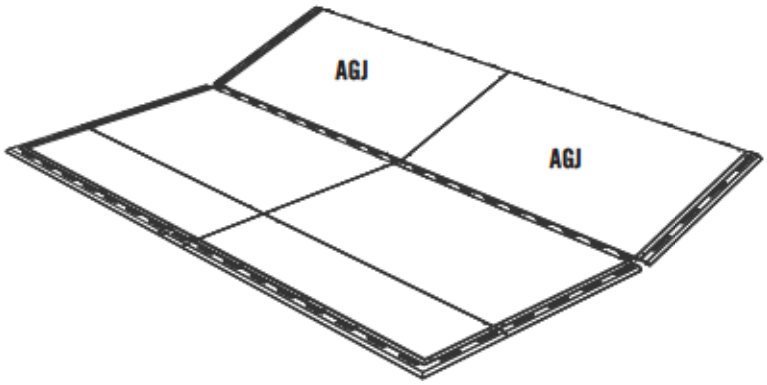


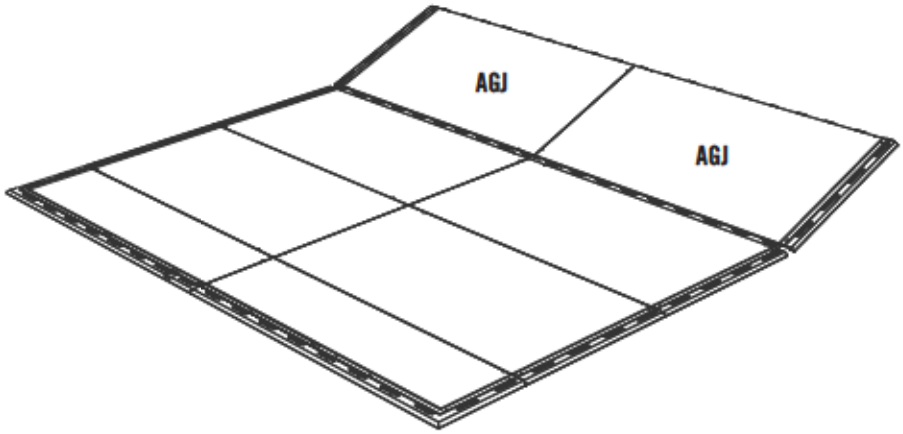


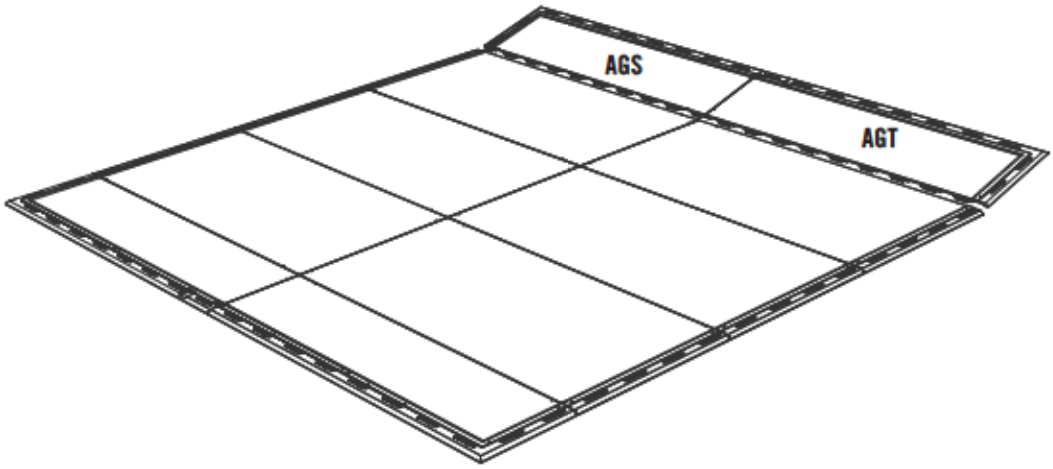

# SEC 3 TRUSS & WALL CHANNEL ASSEMBLY

## HARDWARE REQUIRED — HARDWARE BOX REQUIRED: BGV (x4)

Hardware shown at actual size



**AAK** (x40)
1/4" x 1 1/2" Hex Bolt

**ADJ** (x40)
1/4" Cap Nut

Hardware shown at 50% of actual size



**AIP** (x4)
Truss Gutter Connector

**AHT** (x8)
Floor Bracket

## METAL PARTS REQUIRED — METAL PARTS KITS REQUIRED: BNN, BNF, BNG, BNL, BNK

Parts shown at 8% of actual size






**AFH** (x8)
Truss Gutter Channel






**AFG** (x4)
Truss Brace Channel






**AFQ** (x8)
Wall Support Channel




**AFP** (x8)
Truss Support Strip

## TOOLS REQUIRED

**7/16" Wrench** (x2)

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 3








SEC 3.1

### TRUSS ASSEMBLY

Fit two **Truss Support Strips (AFP)** together. Bolt Truss Support Strips, **Truss Gutter Connector (AIP)**, and two **Truss Gutter Channels (AFH)** as shown using the required hardware.

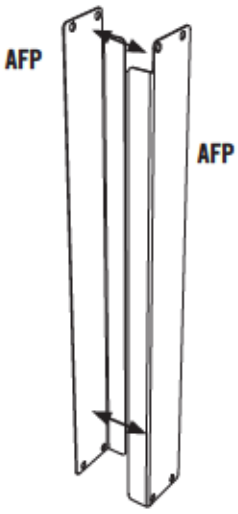


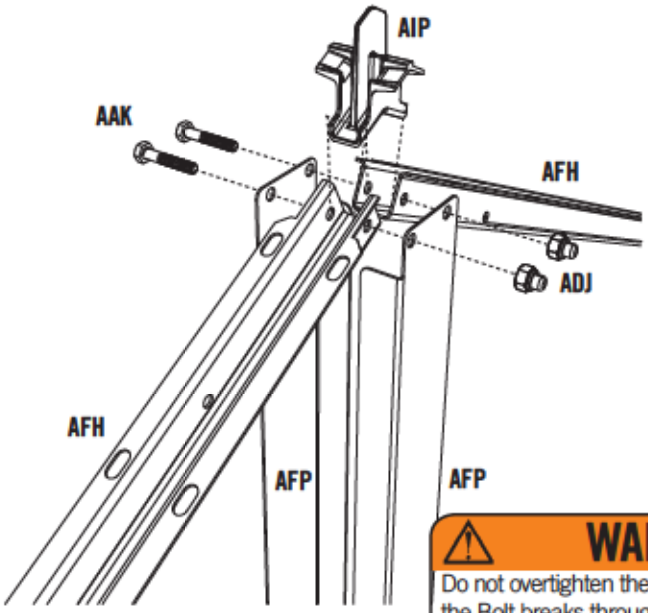


**Note: Only finger tighten hardware.**

**WARNING**

Do not overtighten the Cap Nut. If the end of the Bolt breaks through the plastic cap, call our Customer Service Department. Exposed threads on the end of the Bolt may cause serious injuries.

SEC 3.2

Attach **Truss Support Strips (AFP)** to the center of a **Truss Brace Channel (AFG)** (Truss Support Strips fit inside the Truss Brace Channel). Attach each end of the Truss Brace Channel to the **Truss Gutter Channels (AFH)** using the required hardware. Tighten all hardware.

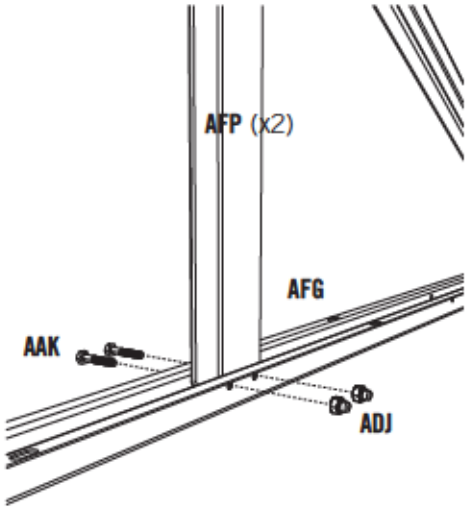


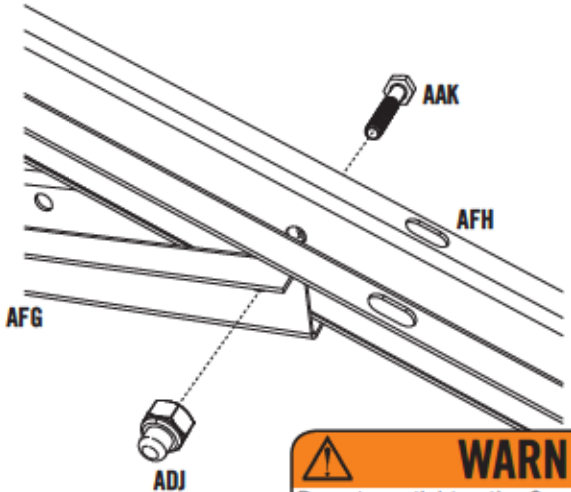


**WARNING**

Do not overtighten the Cap Nut.

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 3



### SEC 3.3

Attach Truss Assembly to two **Wall Support Channels (AFQ)** using **1/4" x 1 1/2" Hex Bolts (AAK)** and **1/4" Cap Nuts (ADJ)**. Do not completely tighten the Cap Nut until after Truss is secured to the Wall.

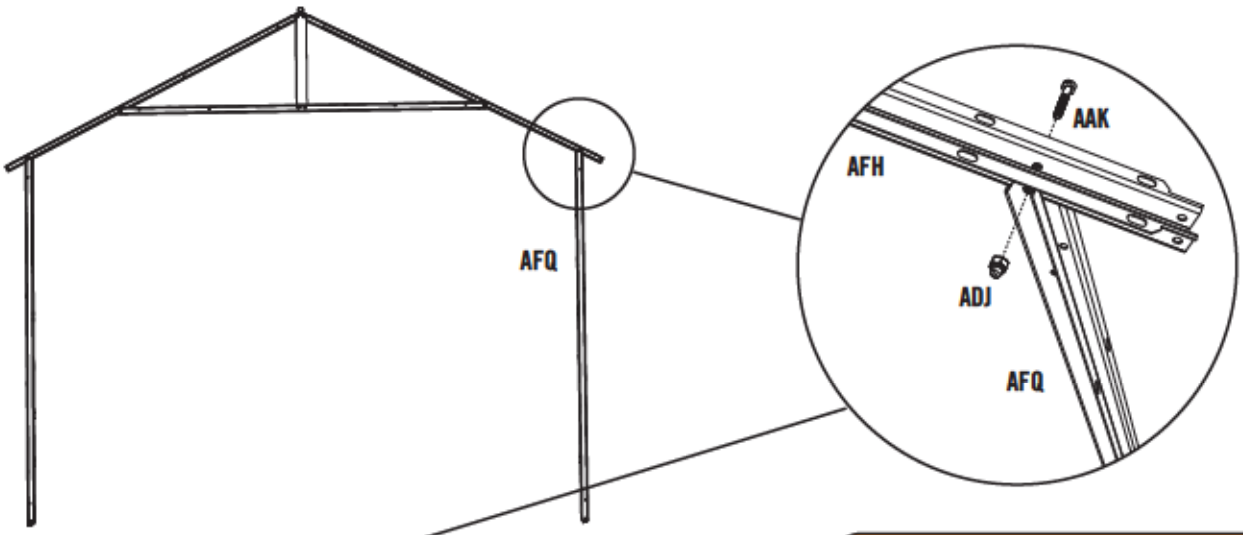


**WARNING**
Do not overtighten the Cap Nut.

*Note: Only finger tighten hardware.*

### SEC 3.4

Attach one **Floor Bracket (AHT)** to the bottom of each Wall Support Channel and to the Floor. Tighten all hardware. You need only do this step if you plan to anchor your Shed. See the "Anchoring the Shed" step at the end of your Owner's Manual.

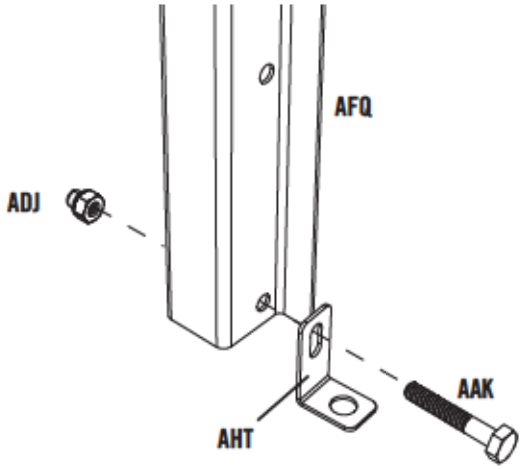


**WARNING**
Do not overtighten the Cap Nut.

**REPEAT THIS SECTION FOR REMAINING TRUSSES**

# SEC 4 WALL PANEL INSTALLATION

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BMX

Hardware shown at actual size

**ADZ** (x78)
1/4" x 5/8" Pan-Head Screw

**ADC** (x1)
#2 Phillips Bit

## METAL PARTS REQUIRED — METAL PARTS KIT REQUIRED: BNN

Part shown at 8% of actual size






**AFR** (x2)
Corner Channel

## PLASTIC PARTS REQUIRED — LOCATED IN BOXES: 2, 3, 4

Part shown at 4% of actual size

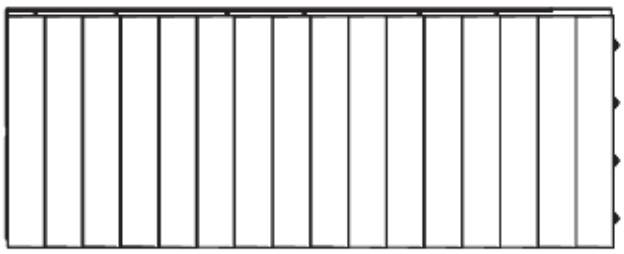

**AHD** (x10)
Wall Panel

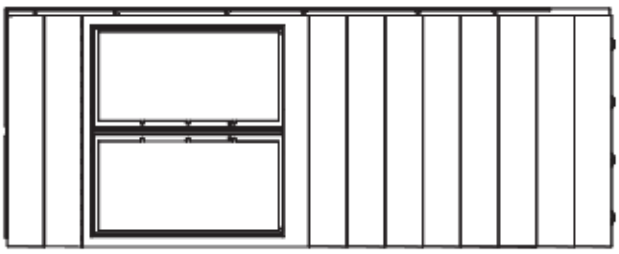

**AHH** (x2)
Window Wall Panel

## TOOLS REQUIRED — HARDWARE BAG REQUIRED: BMX



**Phillips Screwdriver**

**ADC** (x1)
#2 Phillips Bit (Included)

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 4



**ADZ** (x18)

SEC 4.1

### WALL ASSEMBLY

Lock a **Wall Panel (AHD)** into the right front corner position by inserting the tabs at the bottom of the Wall Panel into the slots on the Shed Floor. After inserting the tabs, slide the Wall Panel to the right to lock it in place. Install a **Window Wall Panel (AHH)** and secure with six (6) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**.

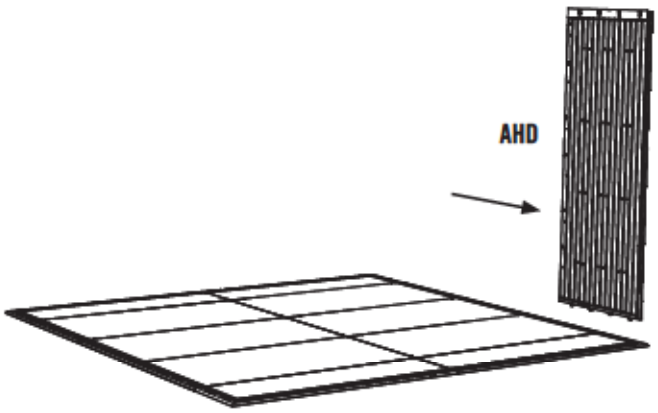


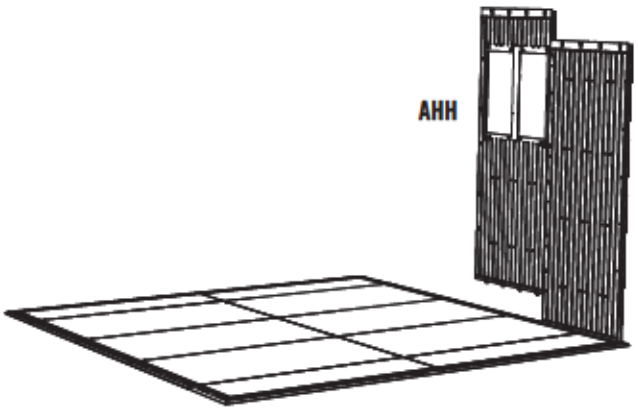


SEC 4.2

Install two more **Wall Panels (AHD)** and secure with twelve (12) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**.

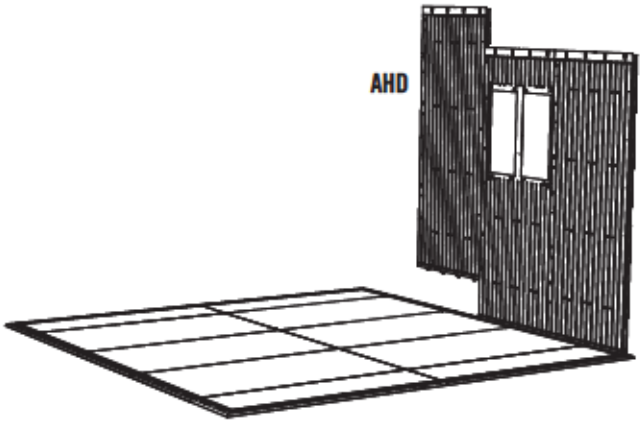


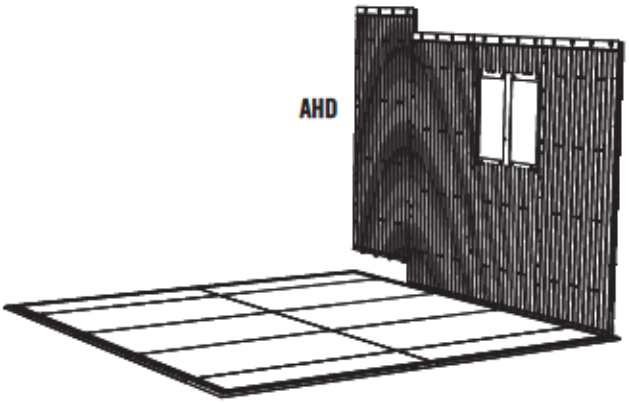


***Note: A second adult should apply pressure to the opposite side of the wall for easy insertion of screws.***

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**ADZ** (x12)

**SEC 4.3**

Install next **Wall Panel (AHD)** at the right, rear corner of the Shed.

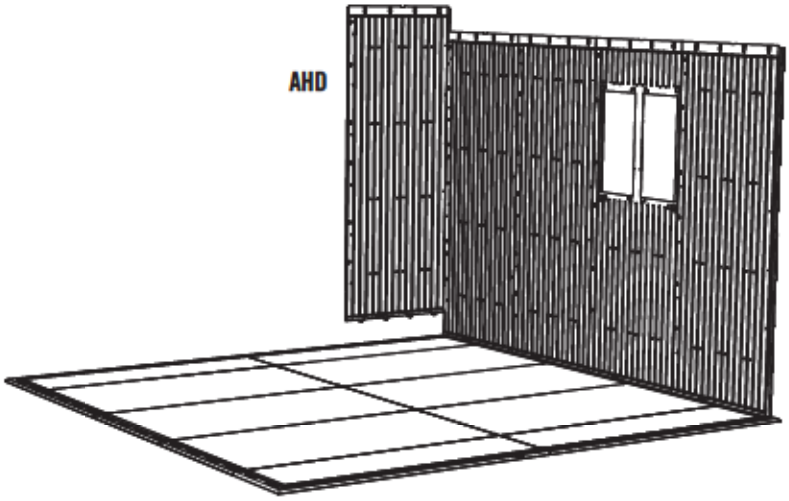


**SEC 4.4**

Align the holes in a **Corner Channel (AFR)** with the holes in two corner Wall Panels and secure the Corner Channel to the Wall Panels with twelve (12) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**.

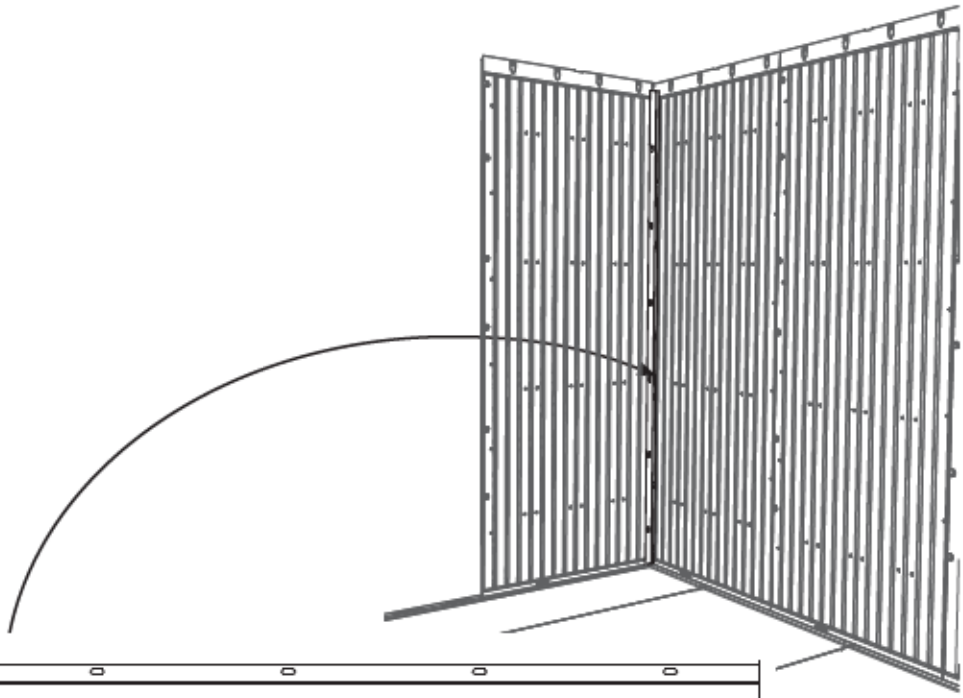

**AFR** (x1)



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**ADZ** (x18)

**SEC 4.5**

Assemble next three **Wall Panels (AHD)**. Secure the Wall Panels together with eighteen (18) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**.

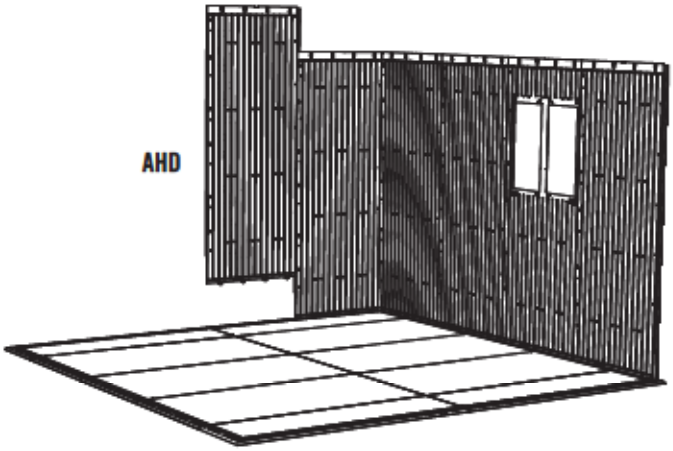


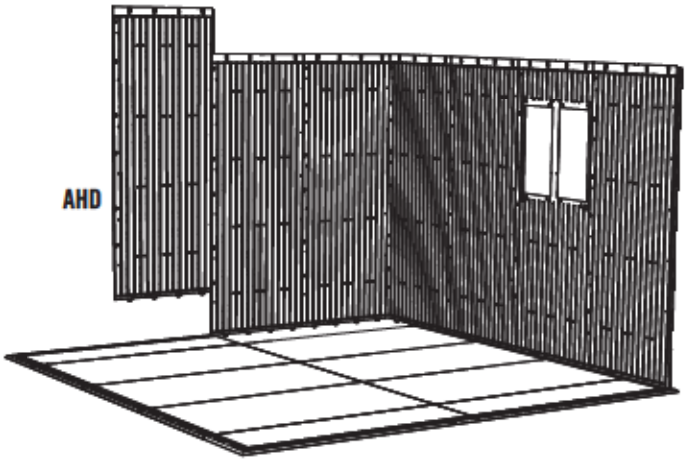


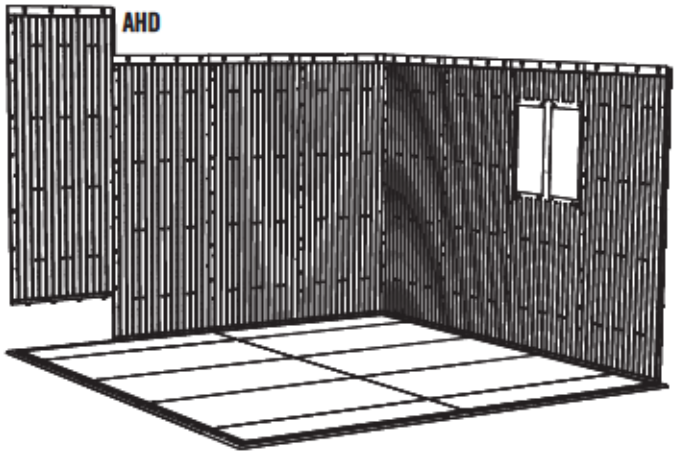


! *Note: A second adult should apply pressure to the opposite side of the wall for easy insertion of screws.*

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**ADZ** (x30)

### SEC 4.6

Install the next Wall Panel at the left, rear corner of the Shed and connect the two rear, corner **Wall Panels (AHD)** with a Corner Channel and twelve (12) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**. Connect the next Wall Panel using six (6) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**.

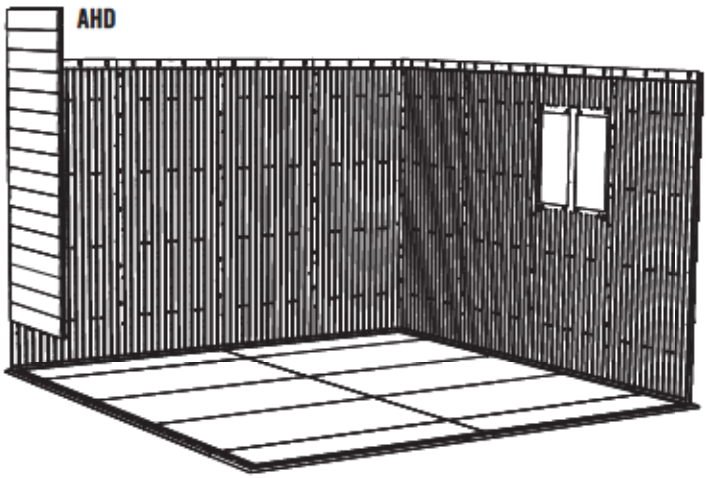


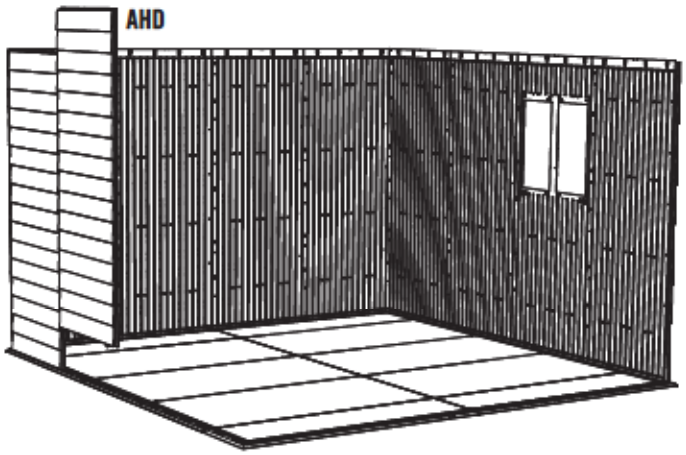


### SEC 4.7

Finally, install the last **Window Wall Panel (AHH)** and **Wall Panel (AHD)** to the Shed using twelve (12) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**.

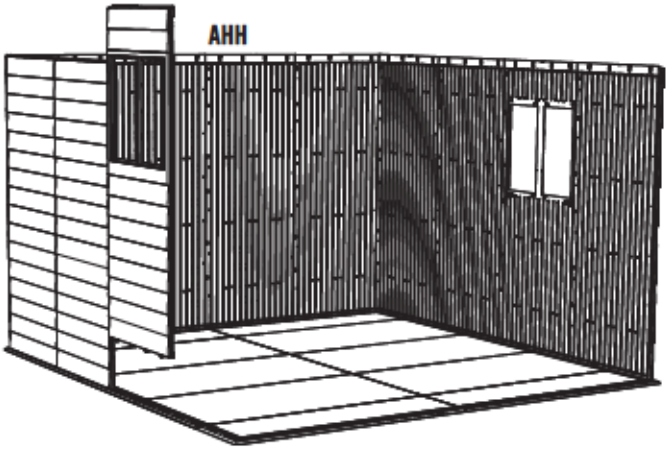


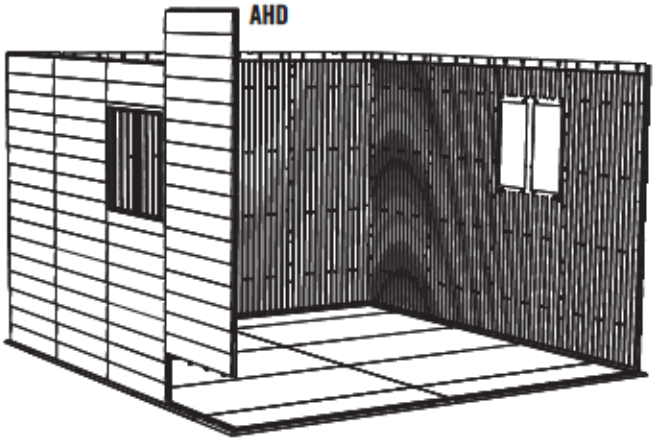


***Note: A second adult should apply pressure to the opposite side of the wall for easy insertion of screws.***

# SEC 5 TRUSS FRAME & WALL SUPPORT INSTALLATION

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BNI

Hardware shown at actual size (*Unless otherwise noted)

**ADZ** (x96)
1/4" x 5/8" Pan-Head Screw



**AAK** (x18)
1/4" x 1 1/2" Hex Bolt
(Not all are used)

**ADJ** (x18)
1/4" Cap Nut
(Not all are used)

**AHT** (x6)*
Floor Bracket
(Not used)

**ADK** (x4)
#10 Cap Nut

**ACD** (x4)
#10 x 3/8" Flat-Head Screw

## METAL PARTS REQUIRED — METAL PARTS KIT REQUIRED: BNN, BNK, BNF

Parts shown at 8% of actual size




**AFN** (x2)
Short Vertical Extension Channel




**AFJ** (x2)
Long Vertical Extension Channel






**AFQ** (x4)
Wall Support Channel

## TOOLS REQUIRED

7/16" Wrench (x2)

7/16" Socket Wrench

Phillips Screwdriver

Safety Glasses

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 5



3/8" (x2)

**ADZ** (x64)

**ADK** (x4)

**ACD** (x4)

SEC 5.1

### TRUSS INSTALLATION

Starting at the back of the Shed, secure a Truss Frame Assembly to the center of each Left and Right Wall Panel with the **1/4" x 5/8" Pan-Head Screws (ADZ)**. **DO NOT** use the 1/4" x 5/8" Pan-Head Screws (ADZ) to secure the Truss Frame Assembly to the center divider in the Window Wall Panel.

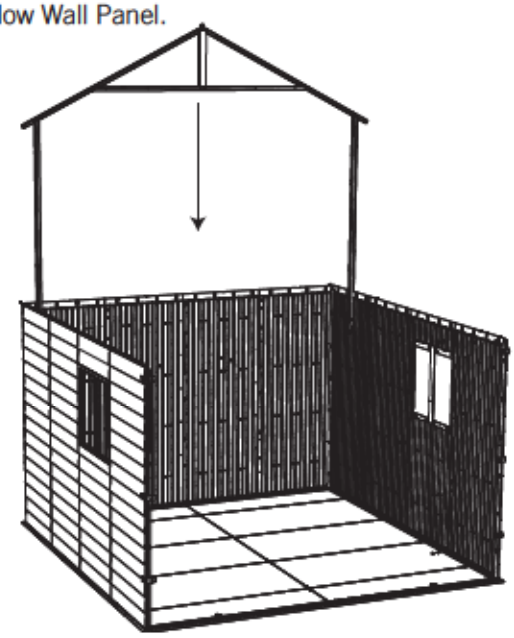

SEC 5.2

Secure the Truss Frame Assembly to the center divider in the Window Wall Panel with two (2) **#10 x 3/8" Flat-Head Screws (ACD)** through the holes in the center of the Window Wall Panels, and secure the Truss Frame Assembly to the center divider with two (2) **#10 Cap Nuts (ADK)**. Repeat this step for second Window Wall Panel.

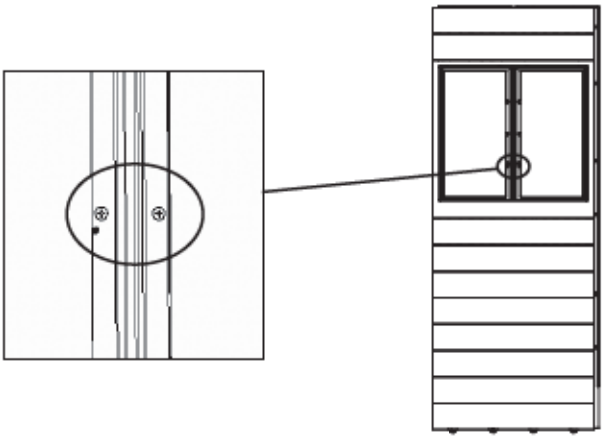

***Note: After installing Truss Assembly, tighten nuts completely.***

**WARNING**

Do not overtighten the Cap Nut. If the end of the Bolt breaks through the plastic cap, call our Customer Service Department. Exposed threads on the end of the Bolt may cause serious injuries.

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE









SEC 5

## REAR GABLE SUPPORT INSTALLATION

**SEC 5.3**

Attach a **Long Vertical Extension Channel (AFJ)** to a **Wall Support Channel (AFQ)**. Repeat.

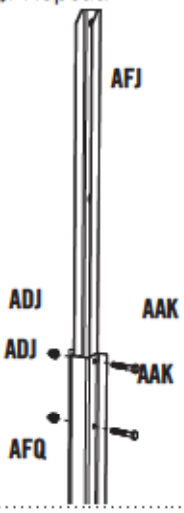


**SEC 5.4**

Attach a **Short Vertical Extension Channel (AFN)** to a Wall Support Channel. Ensure Extension Channel is installed in the correct direction. Repeat.




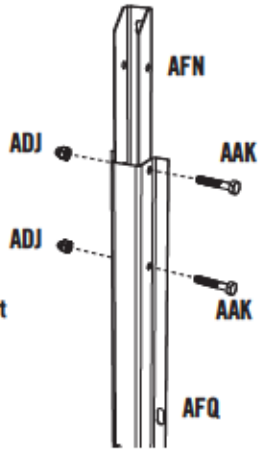


**SEC 5.5**

Secure Wall Supports to rear Wall using thirty-two (32) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**. Position the shorter Supports with Channels at the far left and far right Wall Panels. The long Supports are placed in the middle positions. Do not completely tighten the Screws until after the rear Gable is installed.

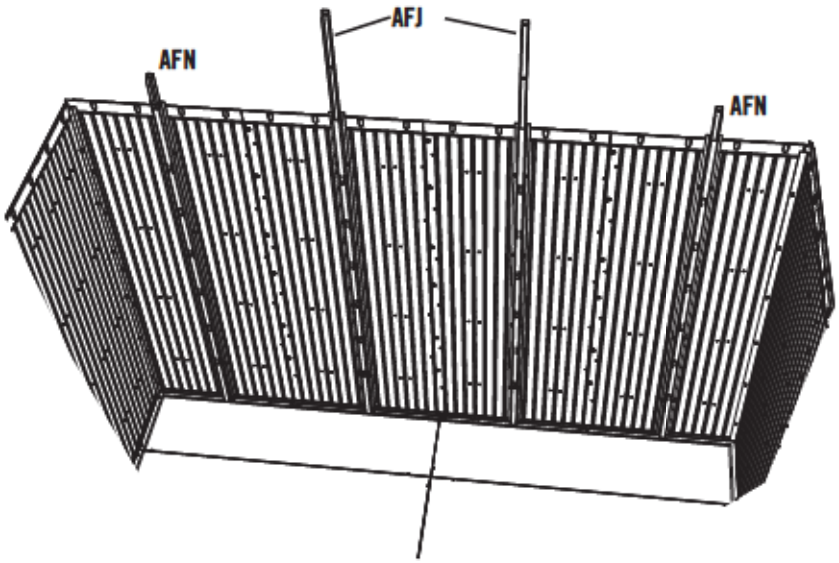


**⚠ WARNING**

Do not overtighten the Cap Nut.

***Note: A second adult should apply pressure to the opposite side of the wall for easy insertion of screws.***

# SEC 6 GABLE ASSEMBLY

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BNA (x2)

Hardware shown at actual size

**AEE** (x10)
#10 x 1/2" Flat Washer

**ADW** (x10)
#10 x 3/4" Pan-Head Screw

**ADZ** (x8)
1/4" x 5/8" Pan-Head Screw

Parts shown at 15% of actual size



**AGP** (x2)
Louvered Vent



**AIQ** (x2)
Vent Screen

## PLASTIC PARTS REQUIRED — LOCATED IN BOX: 1

Parts shown at 4% of actual size

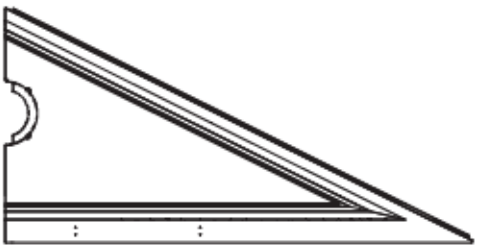

**AGH** (x2)
Gable Half 1

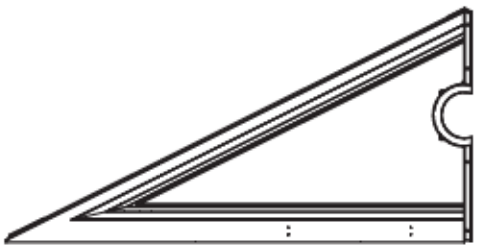

**AGI** (x2)
Gable Half 2

## TOOLS REQUIRED

**Phillips Screwdriver**

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**ADZ** (x8)

SEC 6

SEC 6.1

### GABLE ASSEMBLY

Set the edge of **Gable Half 2 (AGI)** over the edge of **Gable Half 1 (AGH)** as shown.

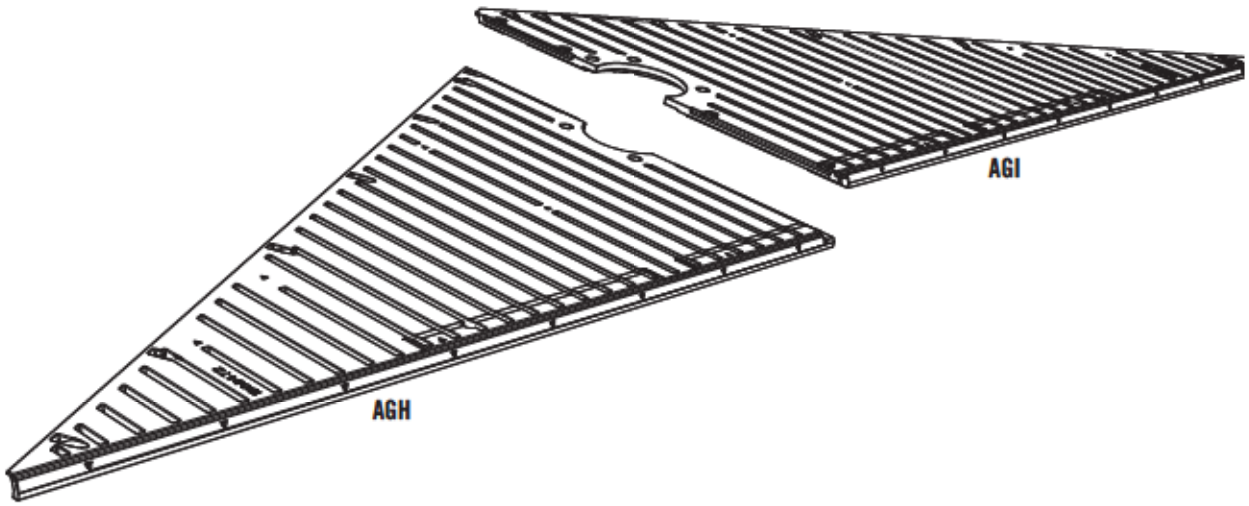


SEC 6.2

Secure the two Gable Halves together using four (4) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

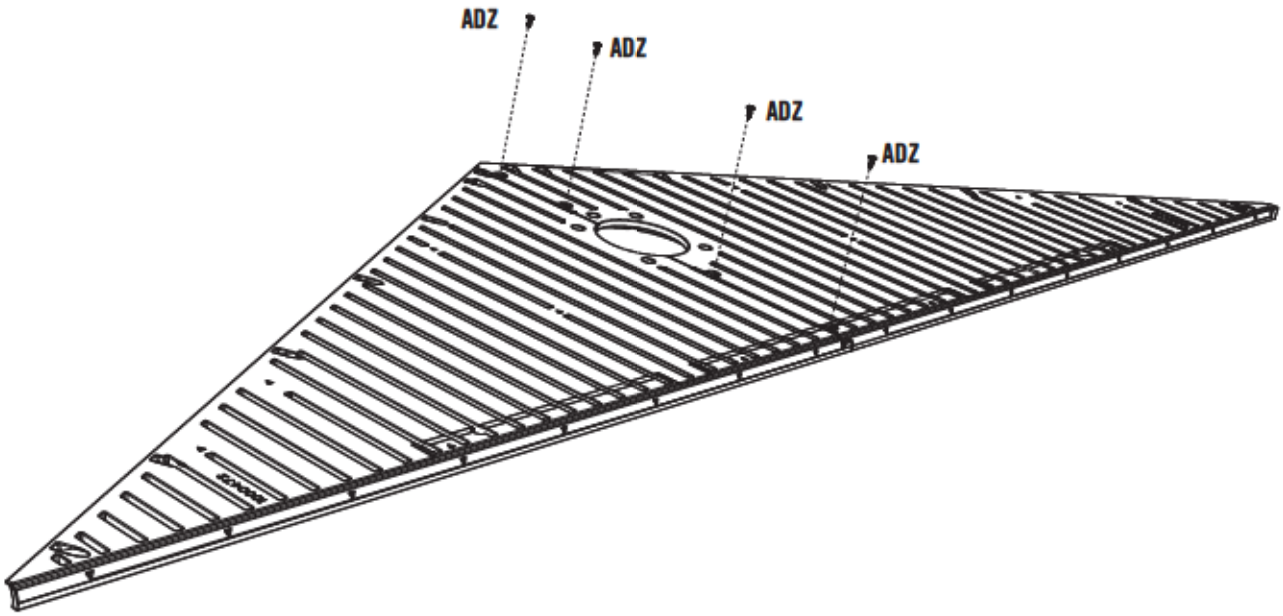

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**AEE** (x10)

**ADW** (x10)

SEC 6

SEC 6.3

Attach the **Louvered Vent (AGP)** and **Vent Screen (AIQ)** to the Gable Assembly using five (5) **#10 x 1/2" Flat Washers (AEE)** and five (5) **#10 x 3/4" Phillips Pan-Head Screws (ADW)**. Set the Gable Assembly aside until later. **Repeat this section for the second Gable.**

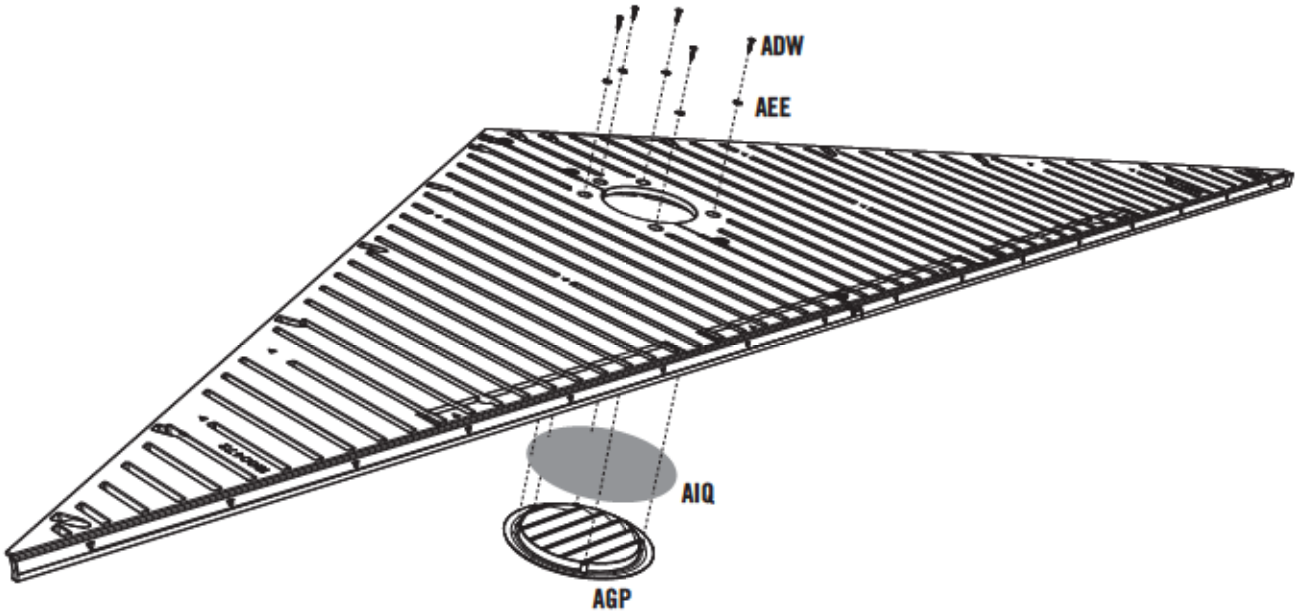

# SEC 7 LEFT DOOR ASSEMBLY

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BMW

Hardware shown at actual size

**ABU** (x2)
1/4" x 1 1/2" Carriage Bolt

**ADJ** (x2)
1/4" Cap Nut



**ADZ** (x9)
1/4" x 5/8" Pan-Head Screw



**AEB** (x2)
1/4" Flat Washer

Hardware shown at 25% of actual size

**AHM** (x2)
Dead Bolt Latch

## METAL PARTS REQUIRED — LOCATED IN BOX 1 AND METAL PARTS KIT: BNM

Part shown at 8% of actual size



**BKZ** (x1)
Center Hinge Assembly




**AFB** (x3)
Door Brace

## PLASTIC PARTS REQUIRED — LOCATED IN BOX: 5

Part shown at 4% of actual size

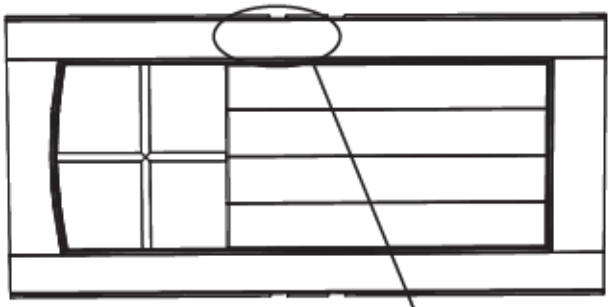

**AGO** (x1)
Left Door

**Note: The Left Door is slightly different from the other two; there are no holes for a handle.**

## TOOLS REQUIRED

Phillips Screwdriver

7/16" Wrench

Safety Glasses

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**ADZ** (x9)

**AHM** (x1)
(Not to scale)

SEC 7

SEC 7.1

### LEFT DOOR ASSEMBLY

Secure three (3) **Door Braces (AFB)** to the inside of the **Left Door (AGO)** using the required hardware.

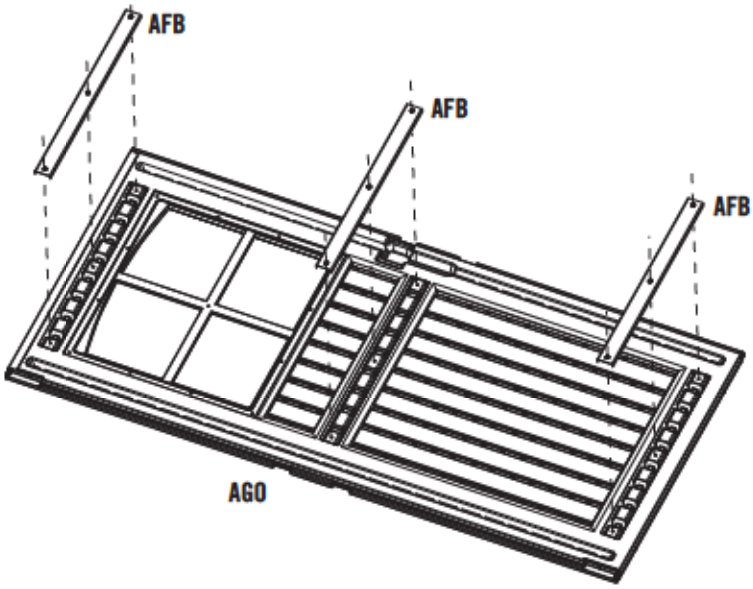


SEC 7.2

Place a **Dead Bolt Latch (AHM)** in the notch at the top of the door as shown. Orient a **Center Hinge Assembly (BKZ)** as shown, and slide the Center Hinge Assembly down over the bottom lip of the Dead Bolt Latch and the end of the Left Door.

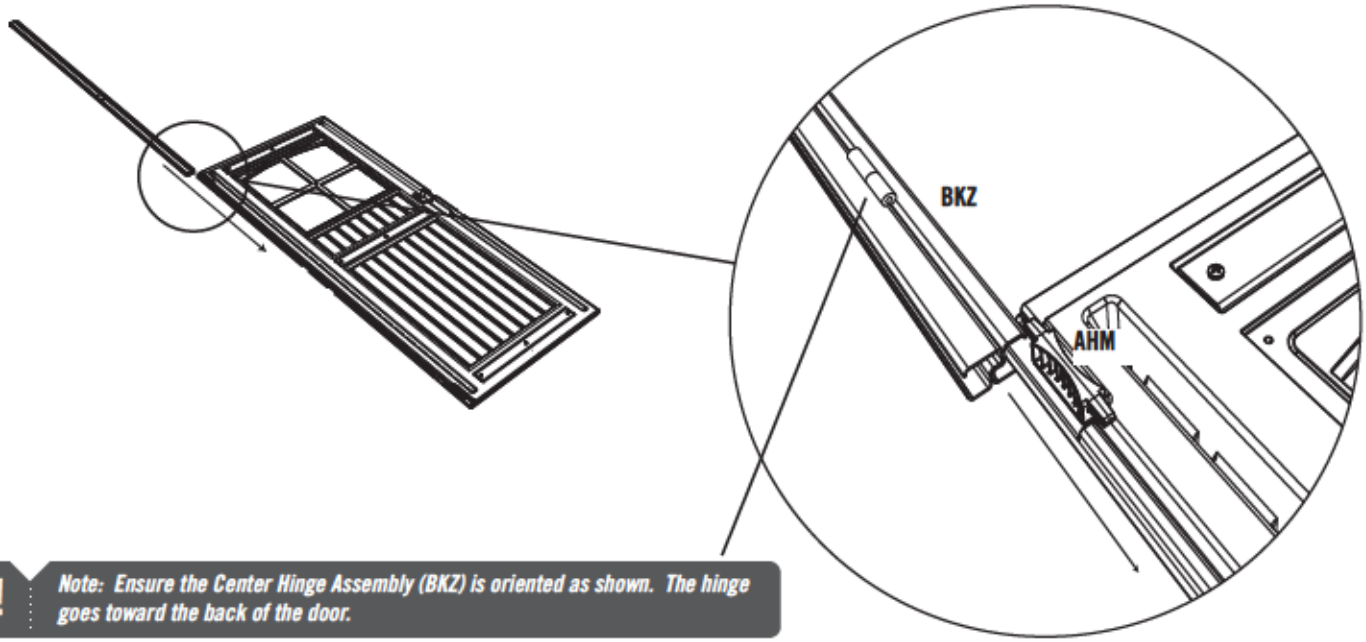


! ***Note: Ensure the Center Hinge Assembly (BKZ) is oriented as shown. The hinge goes toward the back of the door.***

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 7



**ABU** (x2)

**ADJ** (x2)



**AEB** (x2)

**AHM** (x1)
(Not to scale)

### SEC 7.3

Place a second **Dead Bolt Latch (AHM)** in the notch at the bottom of the Left Door, and continue sliding the **Center Hinge Assembly (BKZ)** over the Left Door and over bottom lip of the second Dead Bolt Latch.

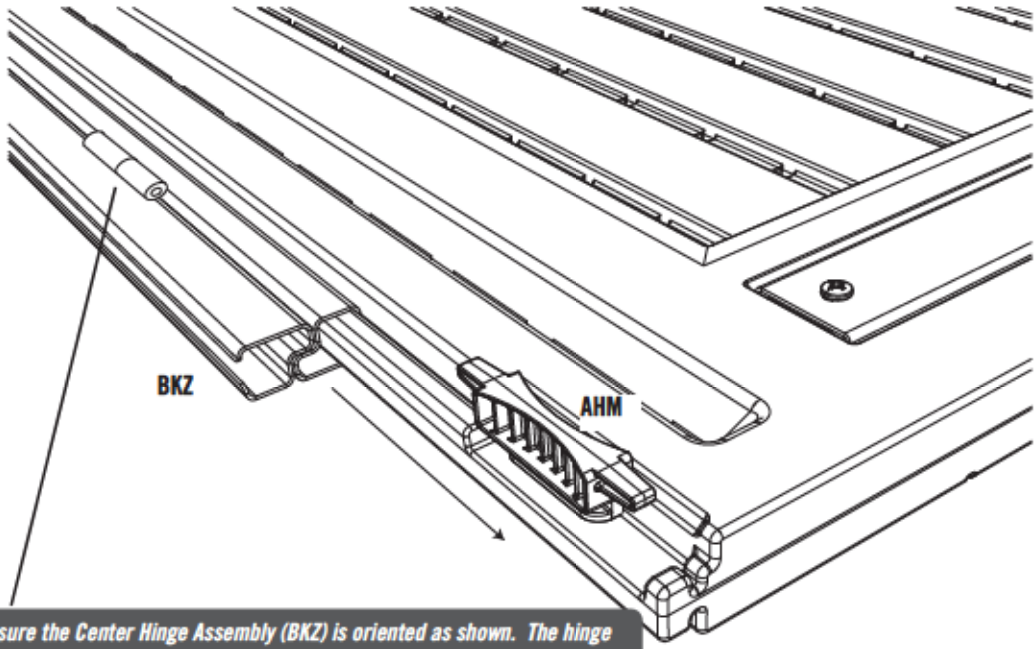


! ***Note: Ensure the Center Hinge Assembly (BKZ) is oriented as shown. The hinge goes toward the back of the door.***

### SEC 7.4

Align the holes in the center of the Center Hinge Assembly with the notch in the edge of the Left Door. Secure The Center Hinge Assembly to the Left Door using the required hardware.

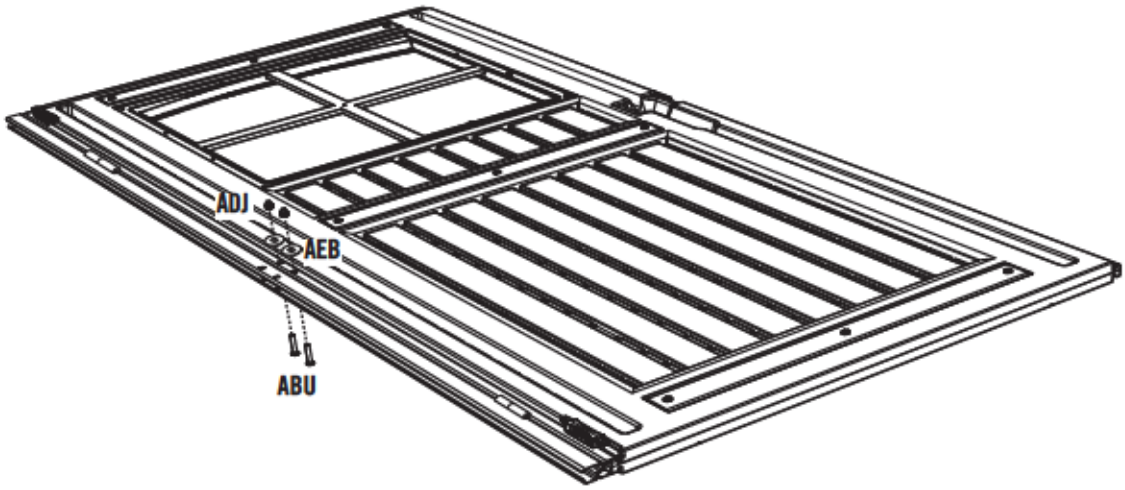

# SEC 8 CENTER DOOR ASSEMBLY

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BMV

Hardware shown at actual size

**ADZ** (x9)
1/4" x 5/8" Pan-Head Screw

**AEE** (x1)
#10 x 1/2" Flat Washer

**ADW** (x3)
#10 x 3/4" Pan-Head Screw



**BBH** (x2)
End Plug



**BQP** (x2)
1/4" x 1 1/4" Carriage Bolt

**ADJ** (x2)
1/4" Cap Nut

**ADX** (x2)
#10 x 1/2" Pan-Head Screw

Hardware shown at 15% of actual size

**AHZ** (x1)
Center Door Handle

Hardware shown at 25% of actual size

**AHM** (x1)
Dead Bolt Latch

**AIB** (x1)
Extended Strike Plate

**AIA** (x1)
Center Door Lock Bracket

Hardware shown at 50% of actual size



**BBI** (x1)
Inside Center Door Handle

## METAL PARTS REQUIRED — LOCATED IN BOX 1 AND METAL PARTS KIT: BNN

Part shown at 8% of actual size

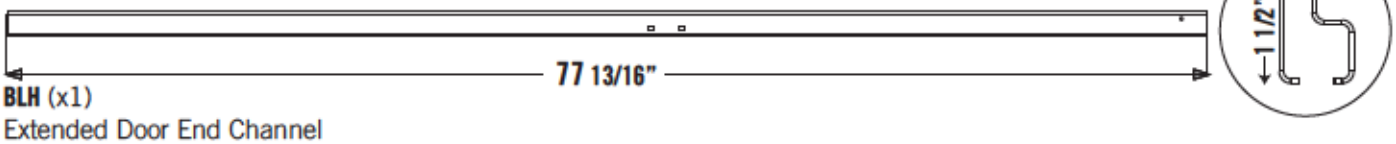


**BLH** (x1)
Extended Door End Channel



**BLG** (x1)
Extended Door Brace




**AFB** (x2)
Door Brace

## PLASTIC PARTS REQUIRED — LOCATED IN BOX: 5

Part shown at 4% of actual size

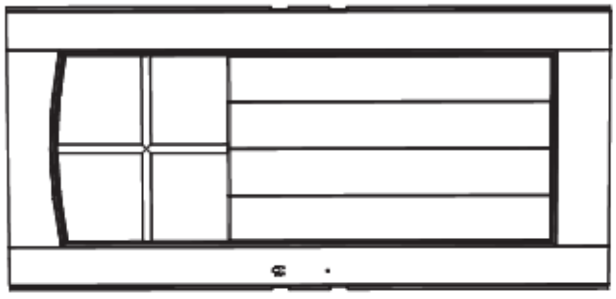

**AGZ** (x1)
Center Door
(The Center and Right Doors are the same part)

## TOOLS REQUIRED

Phillips Screwdriver

7/16" Wrench

Safety Glasses

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 8

**ADZ** (x9)



**BBH** (x2)

## SEC 8.1 CENTER DOOR ASSEMBLY

Insert an **End Plug (BBH)** into each end of the **Extended Door Brace (BLG)**, as shown.

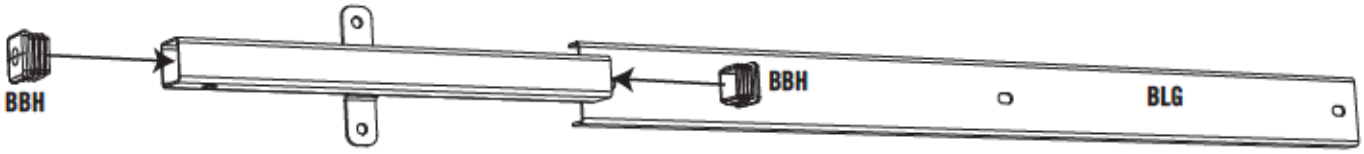


## SEC 8.2

Secure two (2) **Door Braces (AFB)** and the **Extended Door Brace (BLG)** to the inside of the **Center Door (AGZ)**, as shown, using the required hardware.

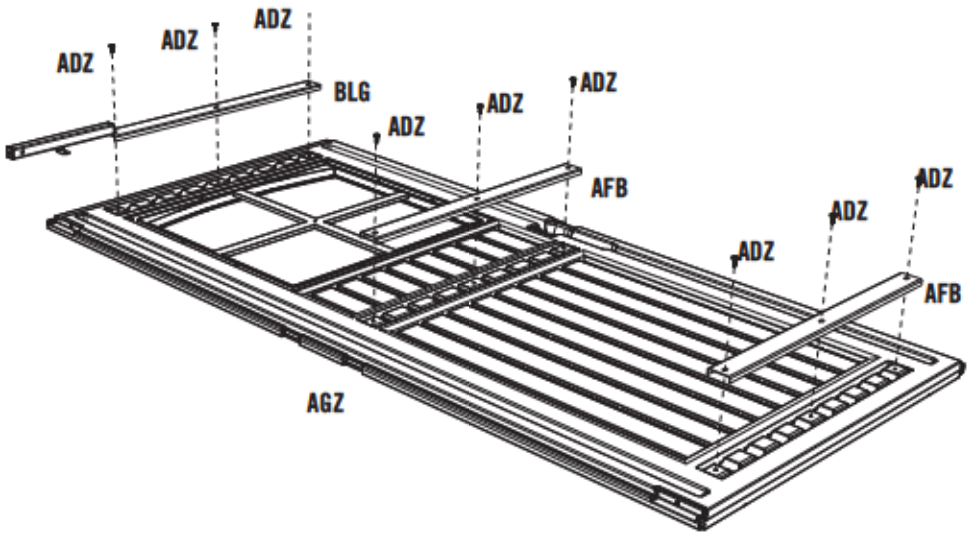

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**AHZ** (x1)
(Not to scale)

**ADW** (x3)



**BBI** (x1)
(Not to scale)

**AHM** (x1)
(Not to scale)

**AEE** (x1)

**SEC 8.3**

Connect the **Center Door Handle (AHZ)** and the **Inside Center Door Handle (BBI)** to the Center Door using the hardware shown.

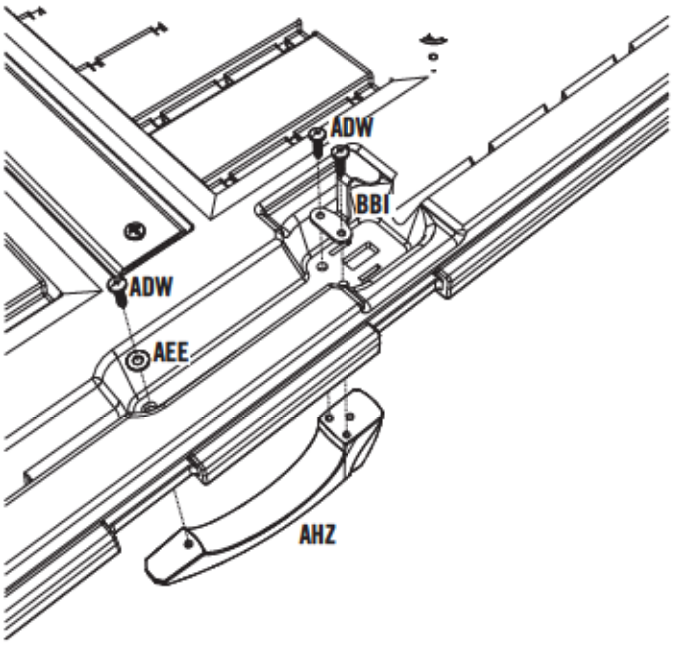


**SEC 8.4**

Orient the **Extended Door End Channel (BLH)**, as shown, and slide the Channel down over the edge of the Center Door. Insert a **Dead Bolt Latch (AHM)** into the notch at the bottom of the Center Door, as shown. Slide the Extended Door End Channel over the Latch.

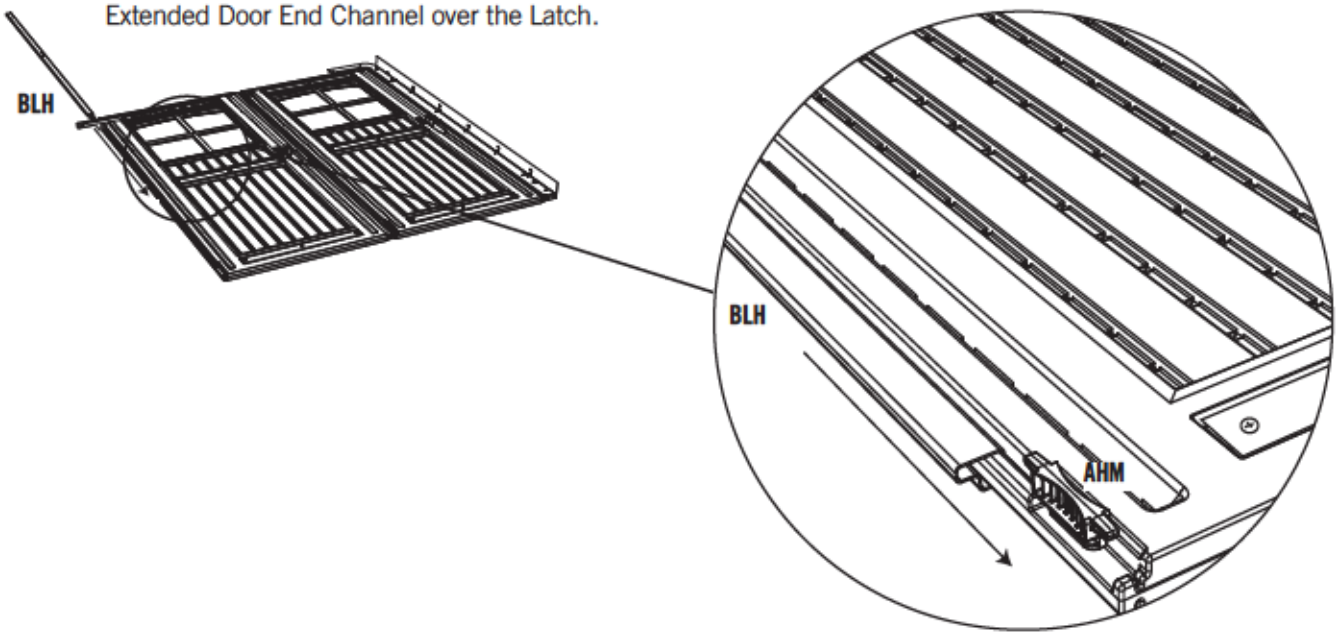

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 8

**AIB** (x1)
(Not to scale)



**BQP** (x2)

**ADJ** (x2)

**AIA** (x1)
(Not to scale)

### SEC 8.5

Orient the **Extended Strike Plate (AIB)** and slide it over the holes in the Extended Door End Channel, as shown.

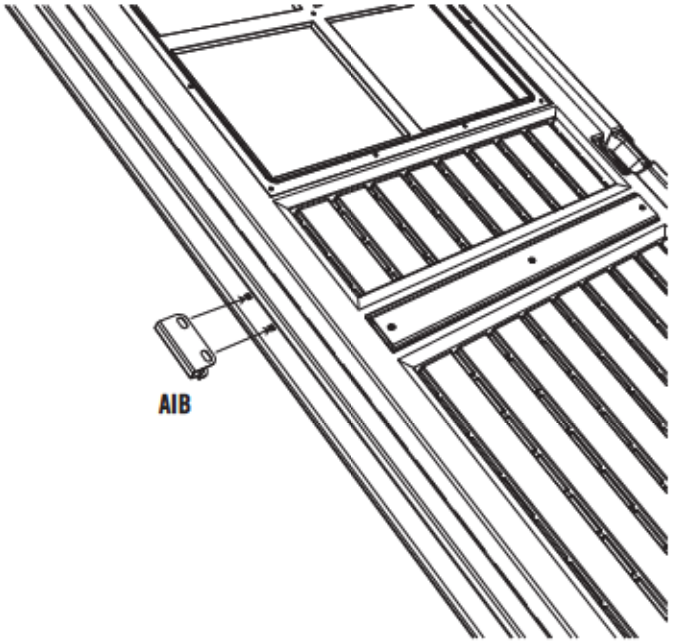


### SEC 8.6

Secure the Extended Strike Plate, Extended Door End Channel, and **Center Door Lock Bracket (AIA)** to the Center Door using the required hardware.

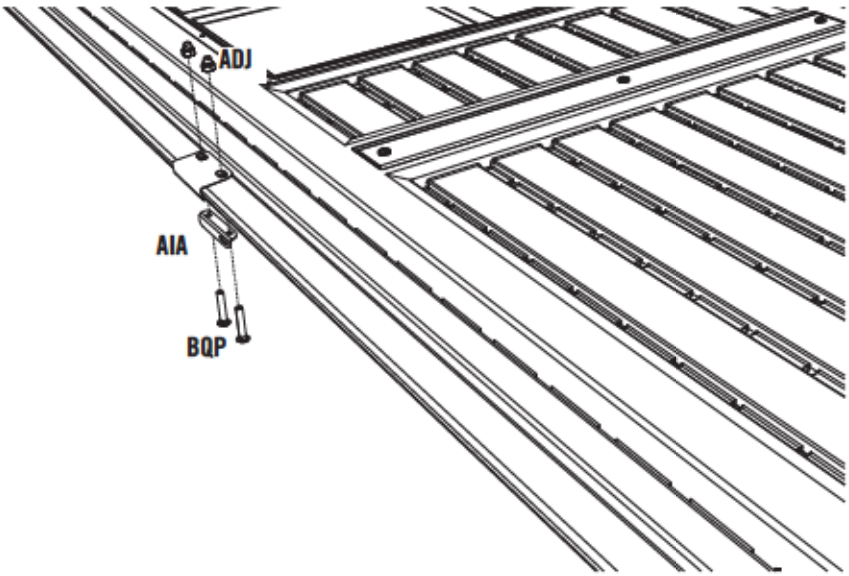


**⚠ WARNING**

Do not overtighten the Cap Nut. If the end of the Bolt breaks through the plastic cap, call our Customer Service Department. Exposed threads on the end of the Bolt may cause serious injuries.

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**ADX** (x2)

**SEC 8.7**

Align the holes in the Extended Door Brace with those in the Extended Door End Channel, and secure using the required hardware.

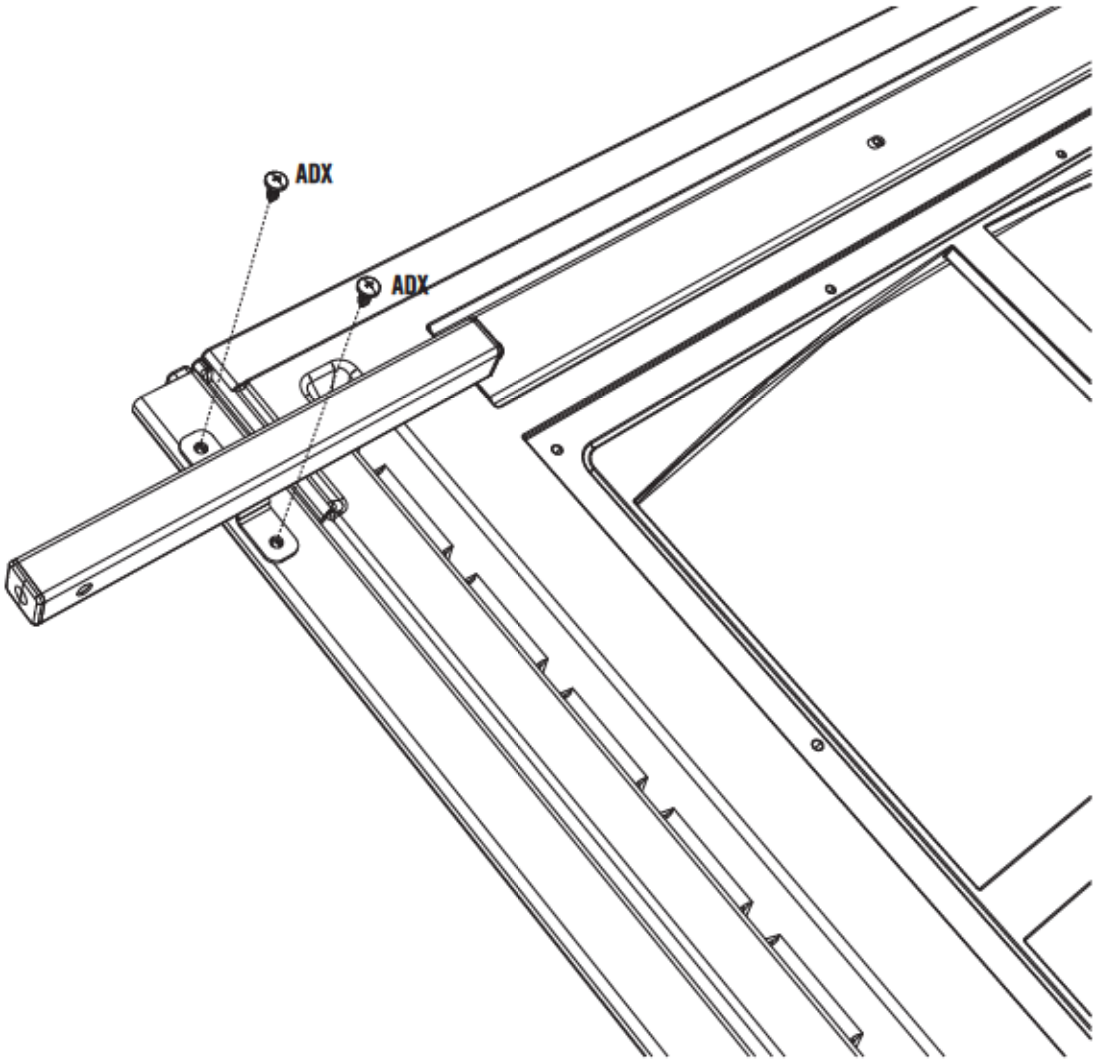

# SEC 9 RIGHT DOOR ASSEMBLY

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BMU

Hardware shown at actual size

**BQQ** (x2)
1/4" x 2 1/4" Carriage Bolt

**ADJ** (x2)
1/4" Cap Nut

**AEE** (x3)
#10 x 1/2" Flat Washer



**AEB** (x2)
1/4" Flat Washer

**ADB** (x2)
3/8" x 1/2" Spacer



**AHY** (x1)
Latch Spring

**ADW** (x4)
#10 x 3/4" Phillips Pan-Head Screw

**ADZ** (x9)
1/4" x 5/8" Phillips Pan-Head Screw

Hardware shown at 25% of actual size

**AHV** (x1)
Extended Door Latch

**AIL** (x1)
Right Door Lock Bracket



**AHX** (x1)
Latch Cover Plate



**AIO** (x1)

Hardware shown at 15% of actual size

**AIK** (x1)
Right Door Handle

Hardware shown at 50% of actual size



**AHW** (x1)
Thumb Lever Extension

## METAL PARTS REQUIRED — LOCATED IN BOX 1 AND METAL PARTS KIT: BNN

Part shown at 8% of actual size




**BLH** (x1)
Extended Door End Channel




**AFB** (x3)
Door Brace

## PLASTIC PARTS REQUIRED — LOCATED IN BOX: 5

Part shown at 4% of actual size

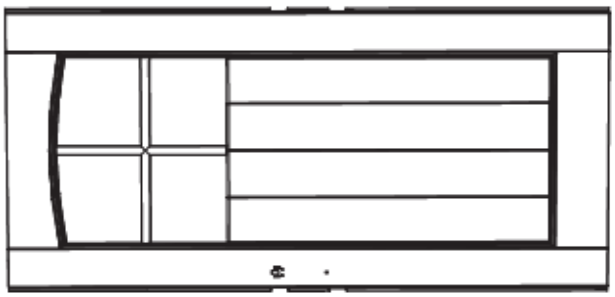

**AGZ** (x1)
Right Door
(The Right and Center Doors are the same part)

## TOOLS REQUIRED

**#2 Phillips Screwdriver**

**7/16" Wrench**

**Needle-Nosed Pliers**

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**ADZ** (x9)

## SEC 9.1 RIGHT DOOR ASSEMBLY

Secure three (3) **Door Braces (AFB)** to the inside of the **Right Door (AGZ)** using the required hardware.

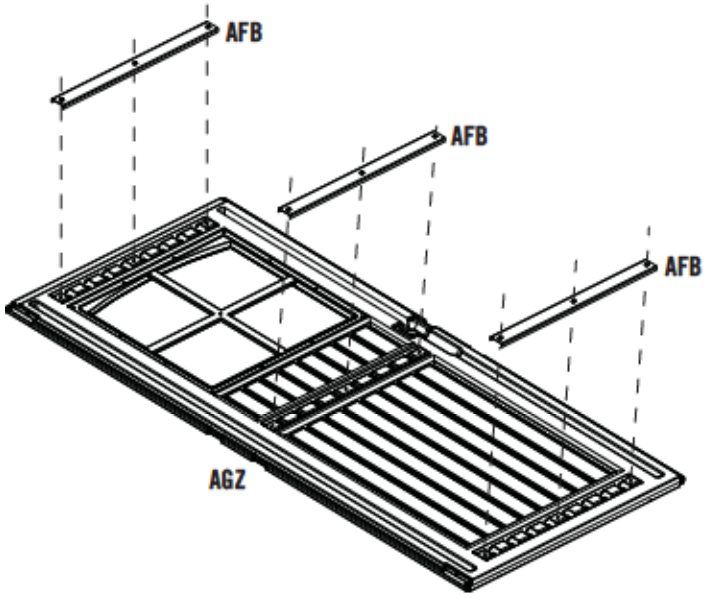


## SEC 9.2

Slide a **Extended Door End Channel (BLH)** down over the edge of the Right Door as shown.

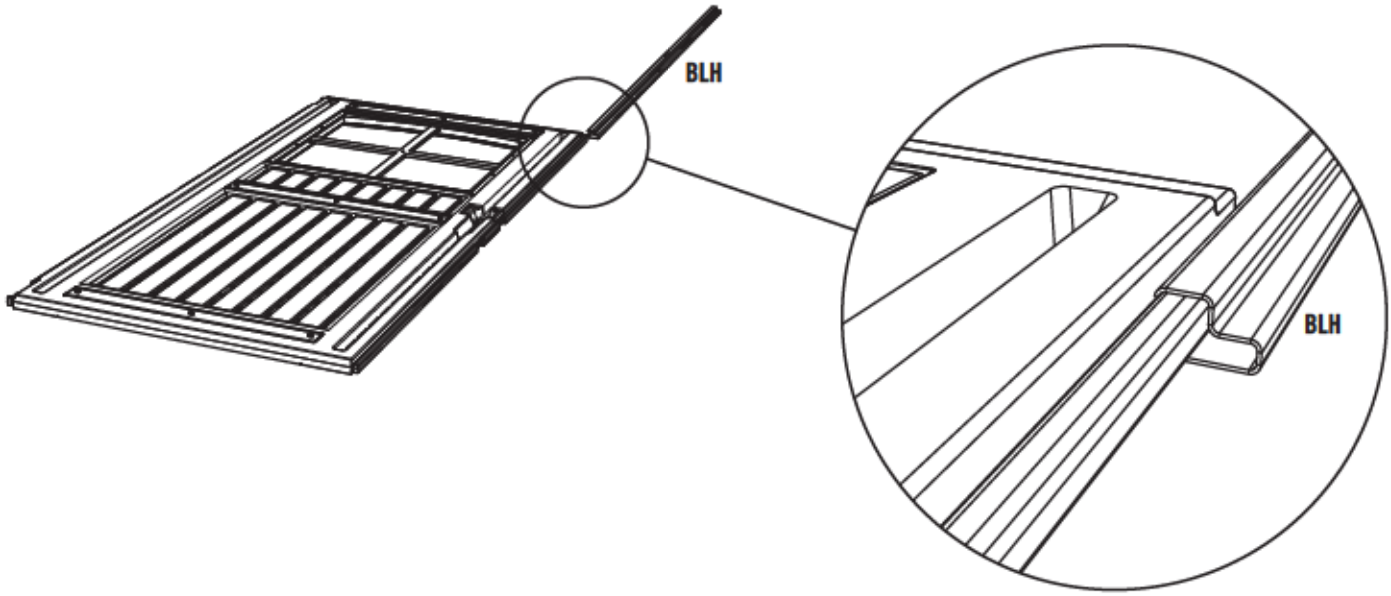

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**AHZ** (x1)
(Not to scale)

**ADW** (x3)



**AIO** (x1)
(Not to scale)

**AEE** (x3)

**SEC 9.3**

Slide the nubs of the **Thumb Lever (AIO)** down the slots and into the holes of the **Right Door Handle (AIK)**.

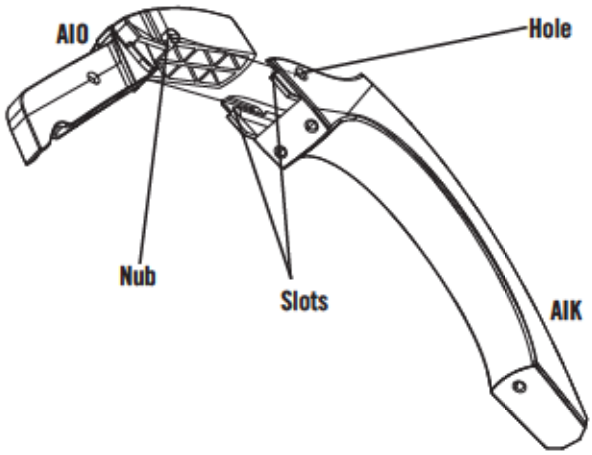


**SEC 9.4**

Insert the end of the Thumb Lever through the slot in the Right Door and connect the Door Handle Assembly to the Right Door using the hardware shown.

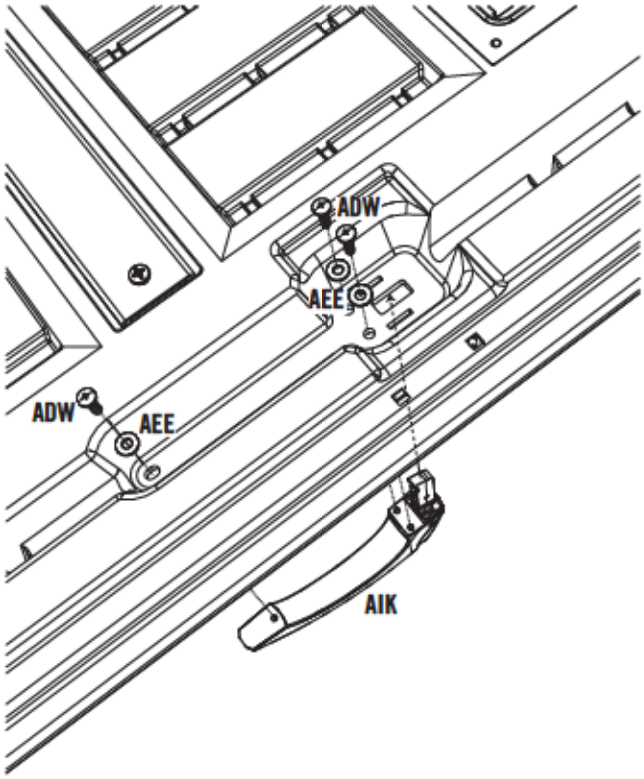

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 9


BQQ (x2)


AHV (x1)
(Not to scale)

AEB (x2)

ADJ (x2)

AIL (x1)
(Not to scale)


AHX (x1)
(Not to scale)

ADB (x2)

**SEC 9.5**

Align the holes in the center of the Extended Door End Channel with the notch in the edge of the Right Door. Connect the **Right Door Lock Bracket (AIL)**, **Extended Door Latch (AHV)**, and **Latch Cover Plate (AHX)** to the Right Door as shown using the required hardware.

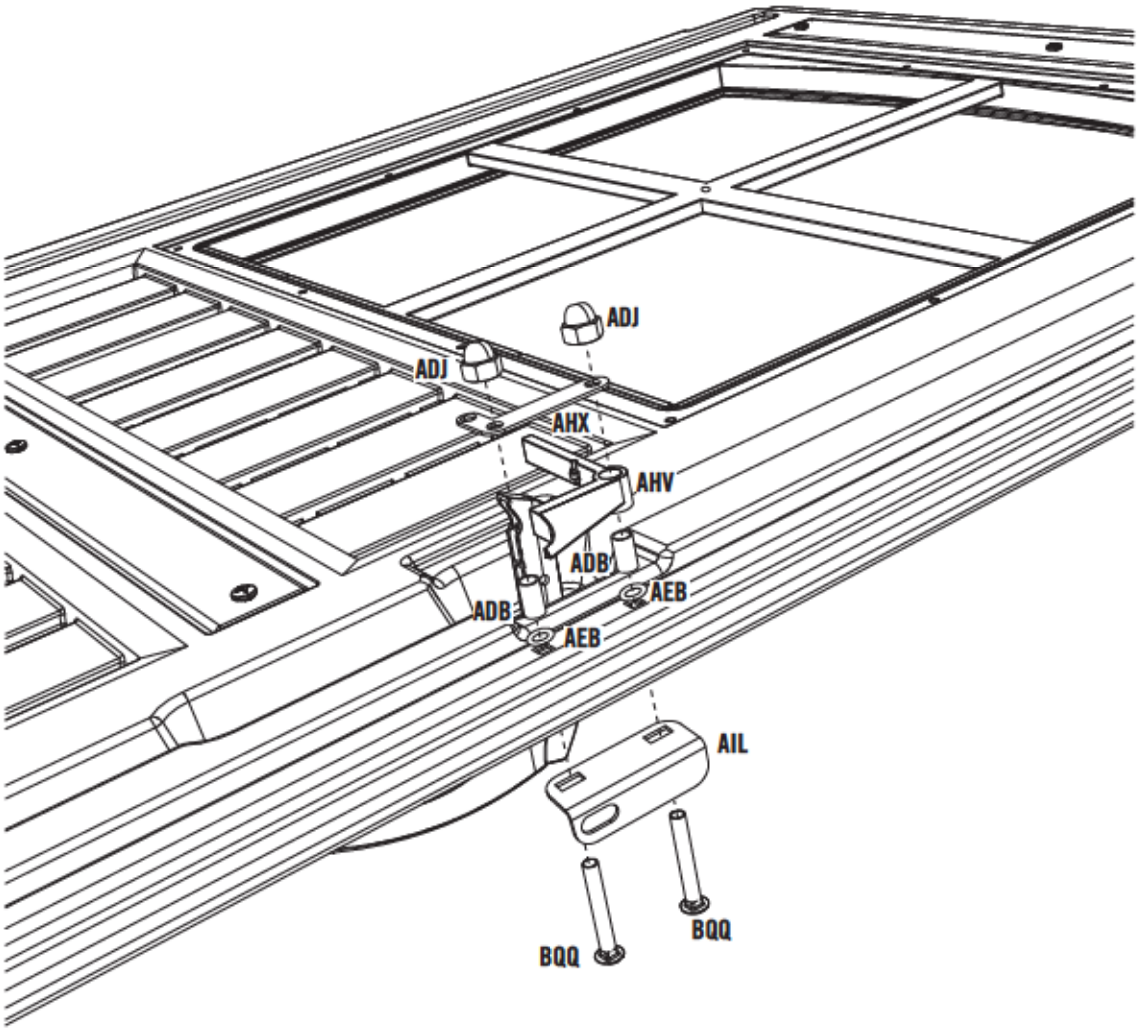

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**AHY** (x1)

**ADW** (x1)



**AHW** (x1)
(Not to scale)

SEC 9

SEC 9.6

Connect the **Thumb Lever Extension (AHW)** to the Thumb Lever with one (1) **#10 x 3/4" Phillips Pan-Head Screw (ADW)**.

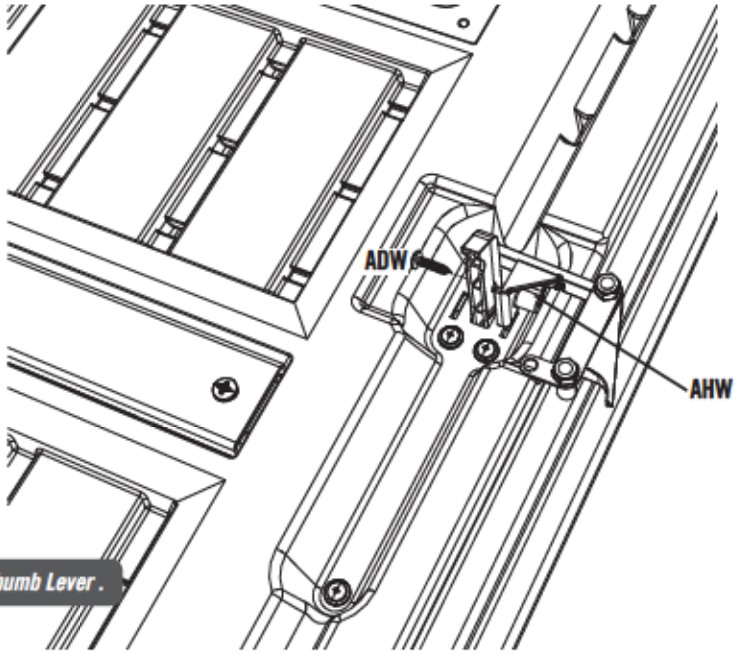


! *Note: The lip of the Thumb Lever Extension (AHW) fits under the Thumb Lever .*

SEC 9.7

Connect the **Latch Spring (AHY)** to the **Extended Door Latch (AHV)** and **Latch Cover Plate (AHX)**.

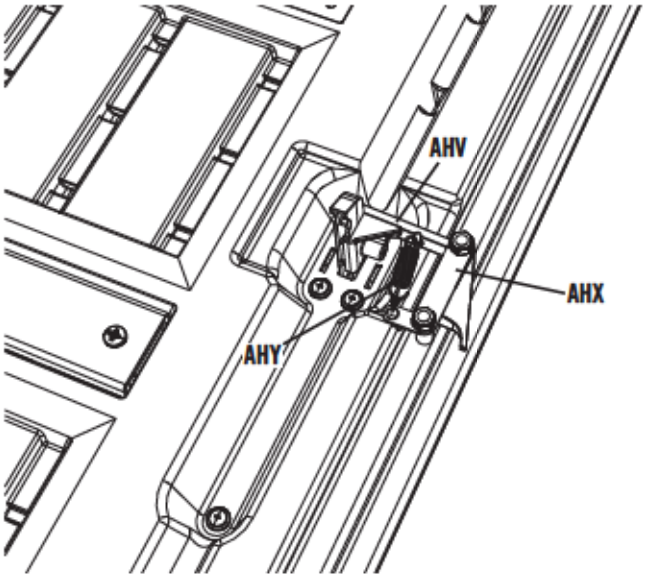


**WARNING**

While performing this step, each person should use protective eye glasses to help prevent serious eye injury.

! *Note: Use pliers to pull spring down and hook into bottom hole.*

# SEC 10 DOOR FRAME AND DOOR INSTALLATION

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BNE

Hardware shown at actual size

**ADZ** (x13)
1/4" x 5/8" Pan-Head Screw



**BBL** (x6)
1/4" x 3/4" Hex Bolt



**BBM** (x4)
1/4" x 1/2" Thread Cutting Screw

**ABU** (x6)
1/4" x 1 1/2" Carriage Bolt



**BBG** (x1)
5/16" x 2 1/2" Hex Bolt

**AAV** (x2)
5/16" Jam Nut



**AEB** (x8)
1/4" Flat Washer

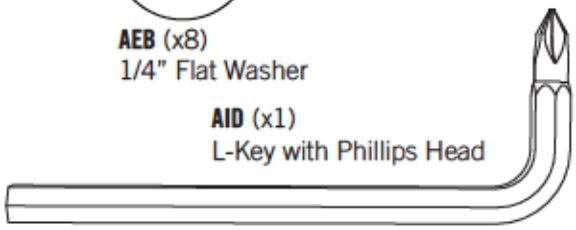

**AID** (x1)
L-Key with Phillips Head



**ACA** (x4)
1/4" x 1/2" Carriage Bolt

**ADJ** (x16)
1/4" Cap Nut

Part shown at 25% of actual size



**BBN** (x1)
Carriage Latch

Parts shown at 50% of actual size

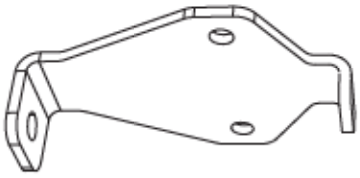

**BBK** (x1)
Carriage Bracket



**BBJ** (x1)
4" Floor Strike Plate



**AHL** (x2)
Dead Bolt Strike Plate

**BBE** (x2)
Carriage Wheel



**CJR** (x2)
Door Frame Support Bracket

## METAL PARTS REQUIRED — LOCATED IN BOX 4 AND METAL PARTS KIT: BNM

Parts shown at 8% of actual size

78 1/4"

**BLJ** (x2)
Corner Door Frame

**Top** **Bottom**

78 1/4"

**BMG** (x1)
Right Hinge Assembly

## METAL PARTS REQUIRED — LOCATED IN BOX 1 AND METAL PARTS KIT: BNM, BNN

Parts shown at 8% of actual size

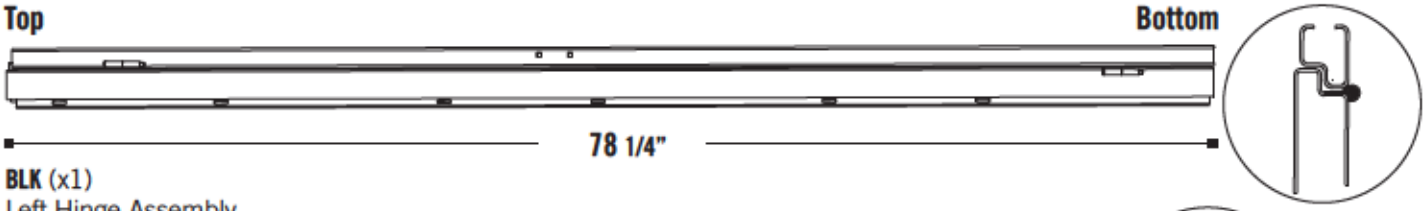


**BLK** (x1)
Left Hinge Assembly

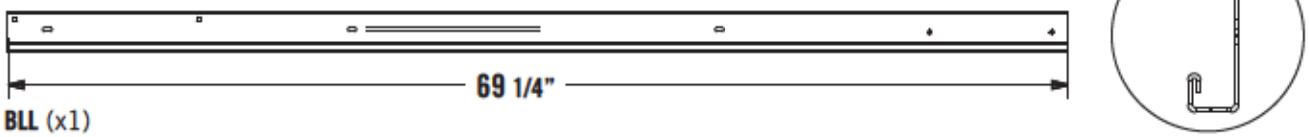


**BLL** (x1)
Long Glider Track

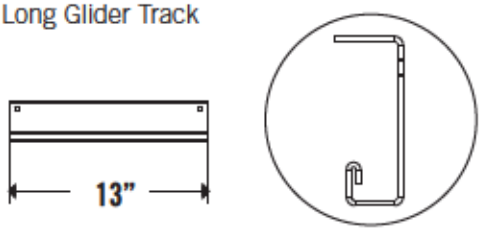


**BLM** (x1)
Short Glider Track

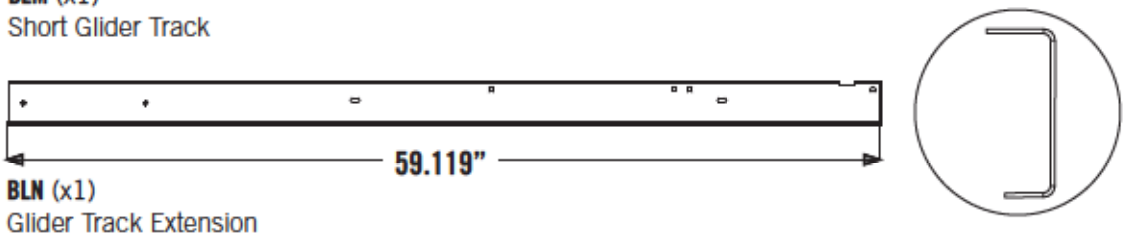


**BLN** (x1)
Glider Track Extension

Part shown at 15% of actual size

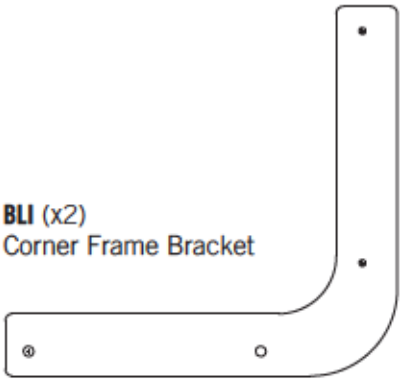

**BLI** (x2)
Corner Frame Bracket

## TOOLS REQUIRED — HARDWARE BAG REQUIRED: BNE

**Phillips Screwdriver**

**AID** (x1) (Not to scale)

**7/16" Wrench**

**5/16" Wrench** (x2)

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 10

**NO HARDWARE REQUIRED FOR THIS PAGE**

**SEC 10.1**

Ensure you use the correct Hinge Assembly for the Left and Right Doors. The hinge faces outward on each door, and the head of the hinge pin always goes on top.

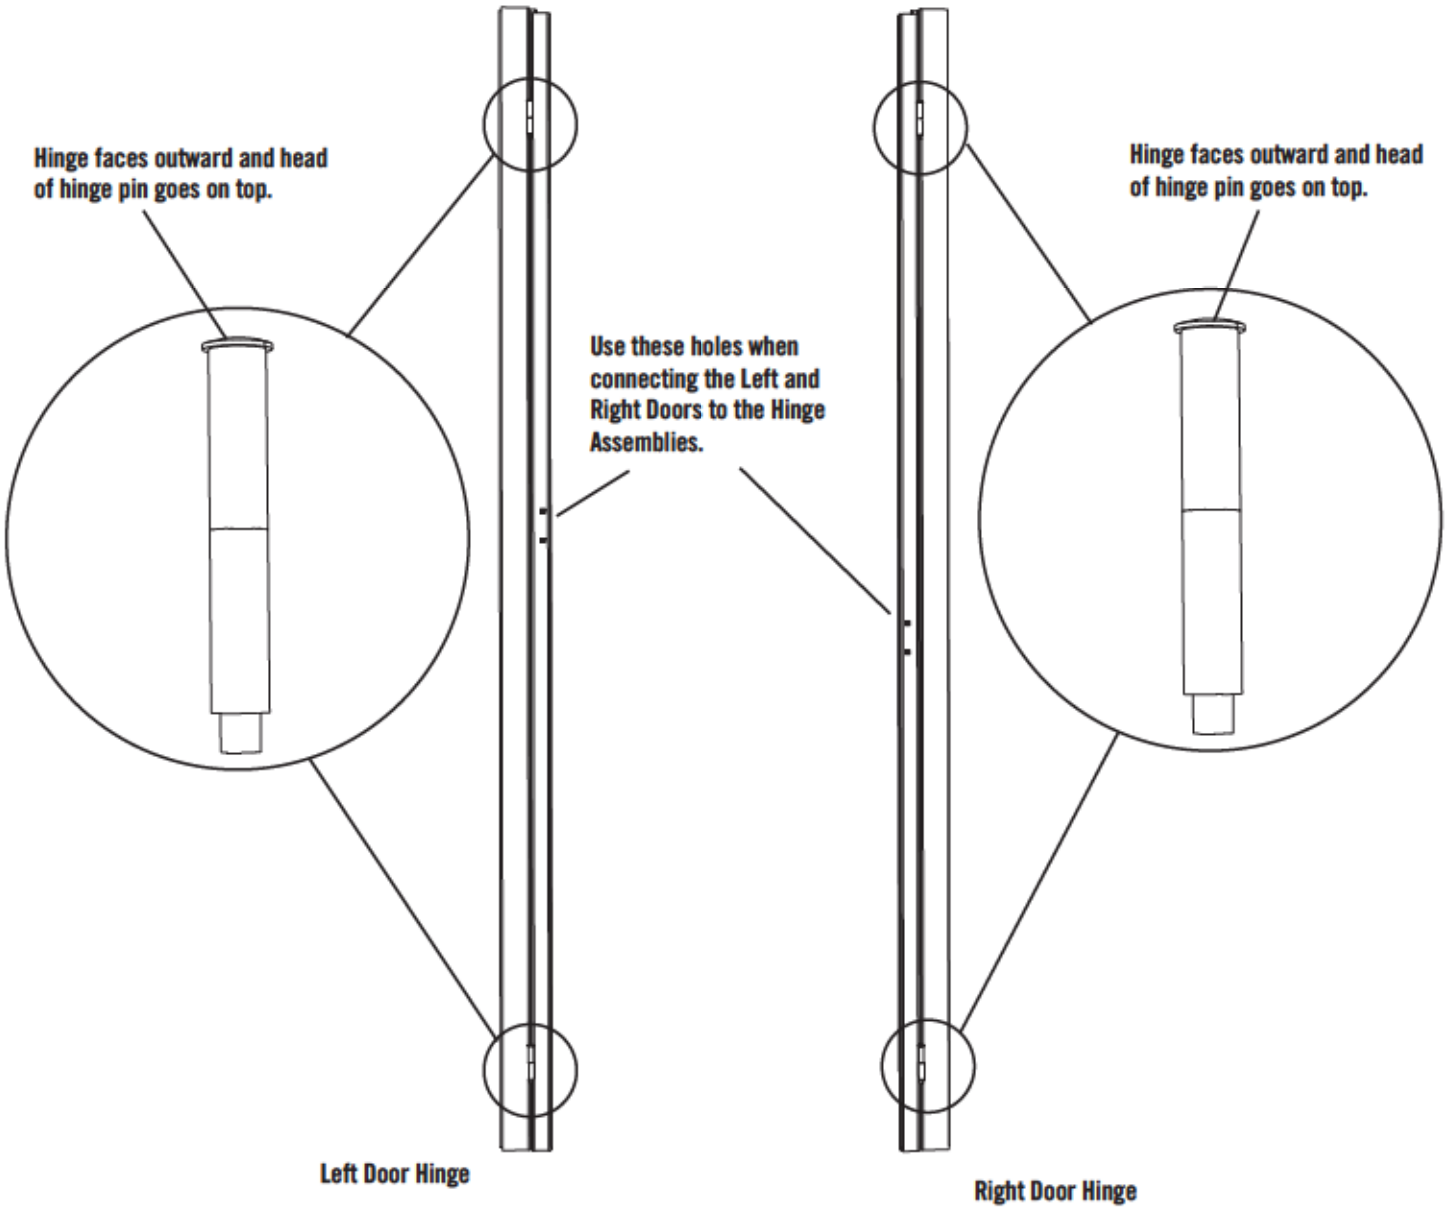

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 10

**NO HARDWARE REQUIRED FOR THIS PAGE**

SEC 10.2

### LEFT DOOR ASSEMBLY

Slide the Left Door Assembly down through the channel of a **Left Hinge Assembly (BLK)** as shown.

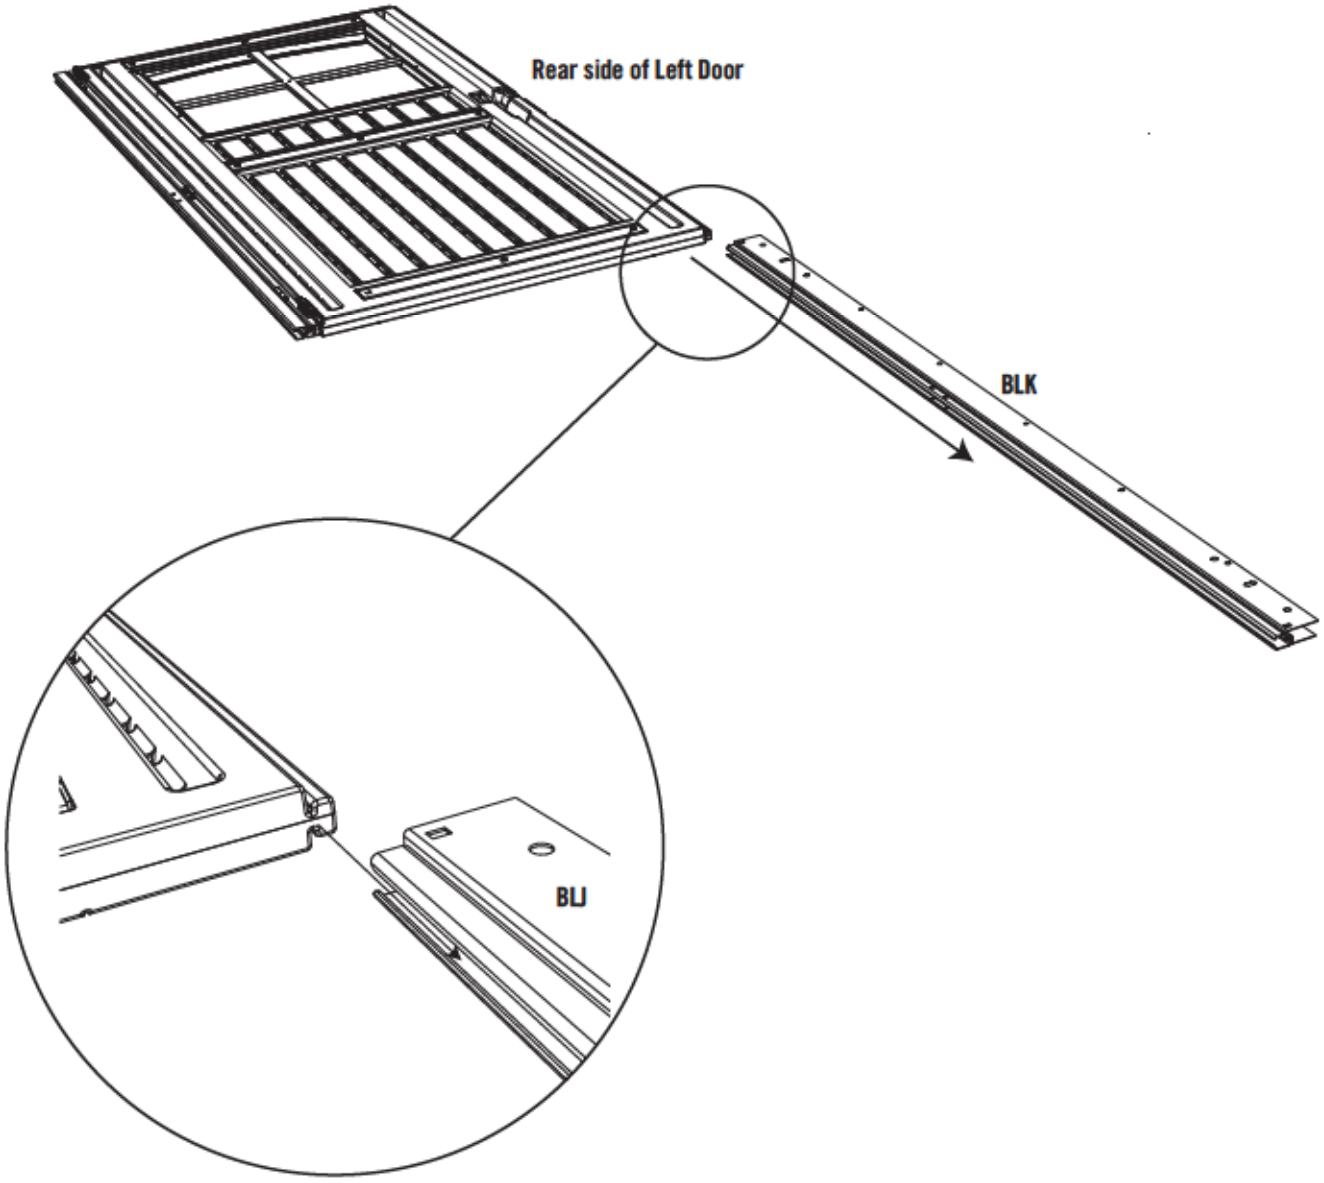

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 10


ABU (x2)


AEB (x2)

ADJ (x2)

**SEC 10.3**

Align the holes in the Left Hinge Assembly with the notch in the Left Door, and secure the Left Hinge Assembly to the Left Door using the required hardware.

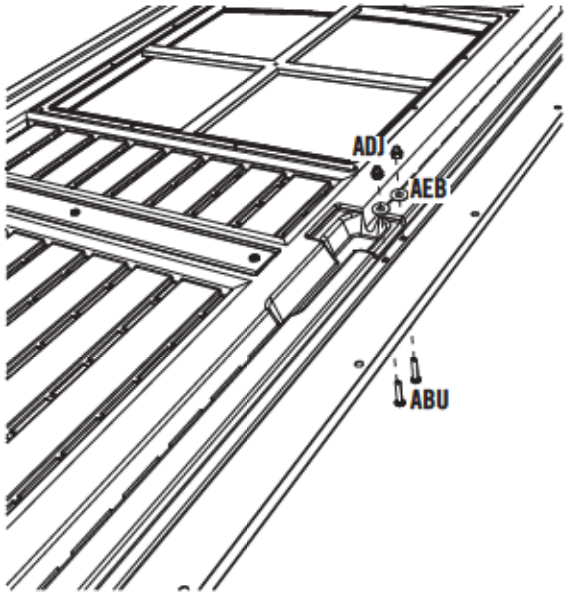


**SEC 10.4**

Slide a **Corner Door Frame (BLJ)** into the Left Hinge Assembly, and align the holes, as shown.

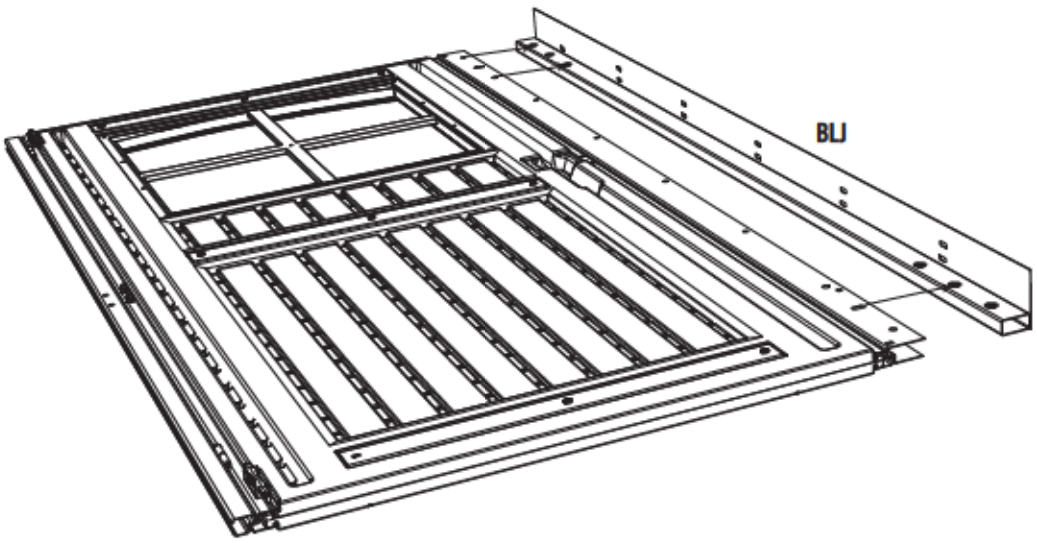

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 10



**BBL** (x3)



**AEB** (x1)

**SEC 10.5**

Secure a **Corner Frame Bracket (BLI)** to the Corner Door Frame and Left Hinge Assembly using the required hardware.

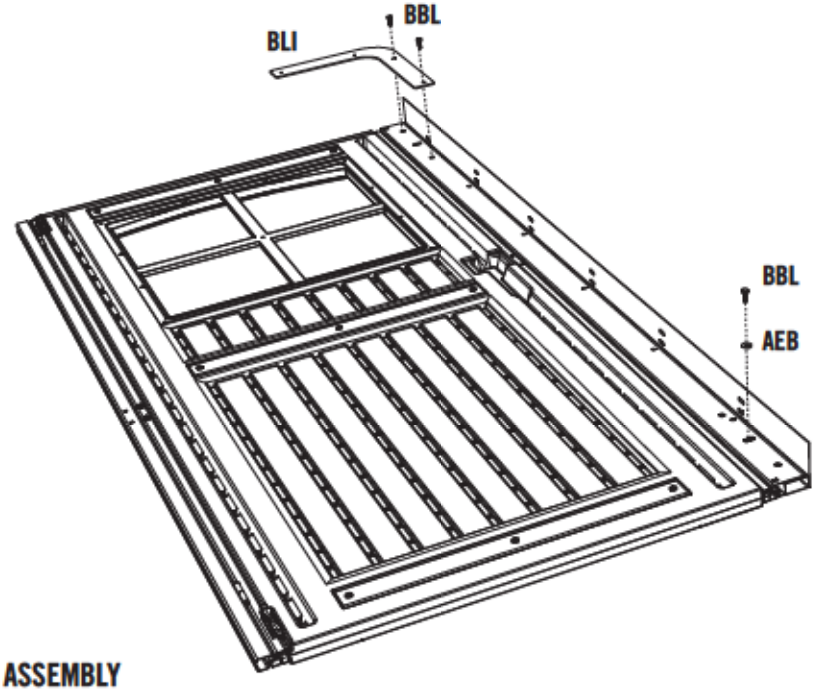


**SEC 10.6**

### CENTER DOOR ASSEMBLY

Slide the Center Door Assembly down through the channel of the Door Hinge End Channel, as shown.

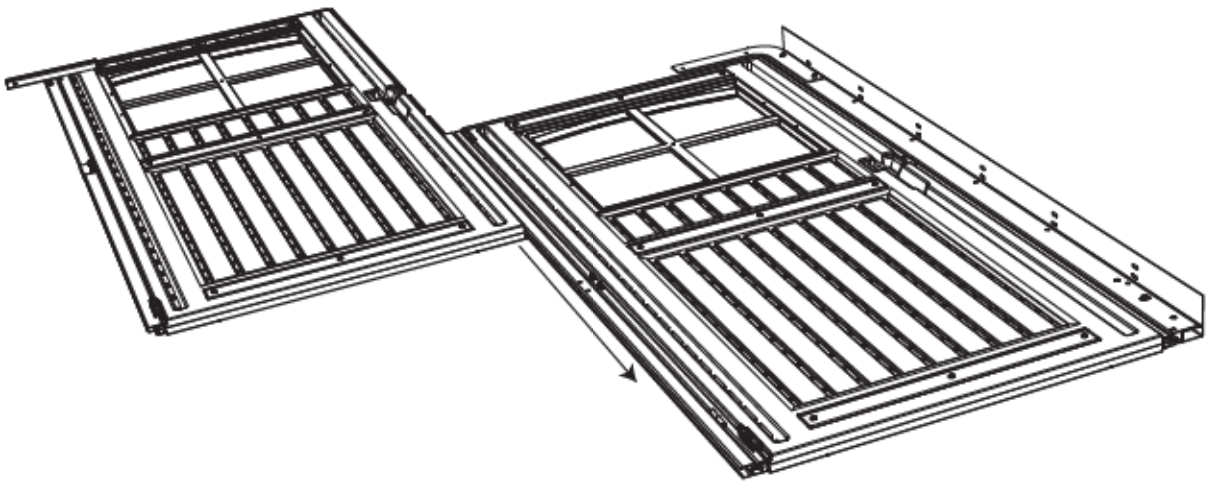

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 10

ABU (x2)


AEB (x2)

ADJ (x2)

## SEC 10.7 RIGHT DOOR ASSEMBLY

Orient the **Right Hinge Assembly (BMG)**, as shown. Slide the Hinge Frame down over the right side of the **Right Door (AGZ)**, as shown.

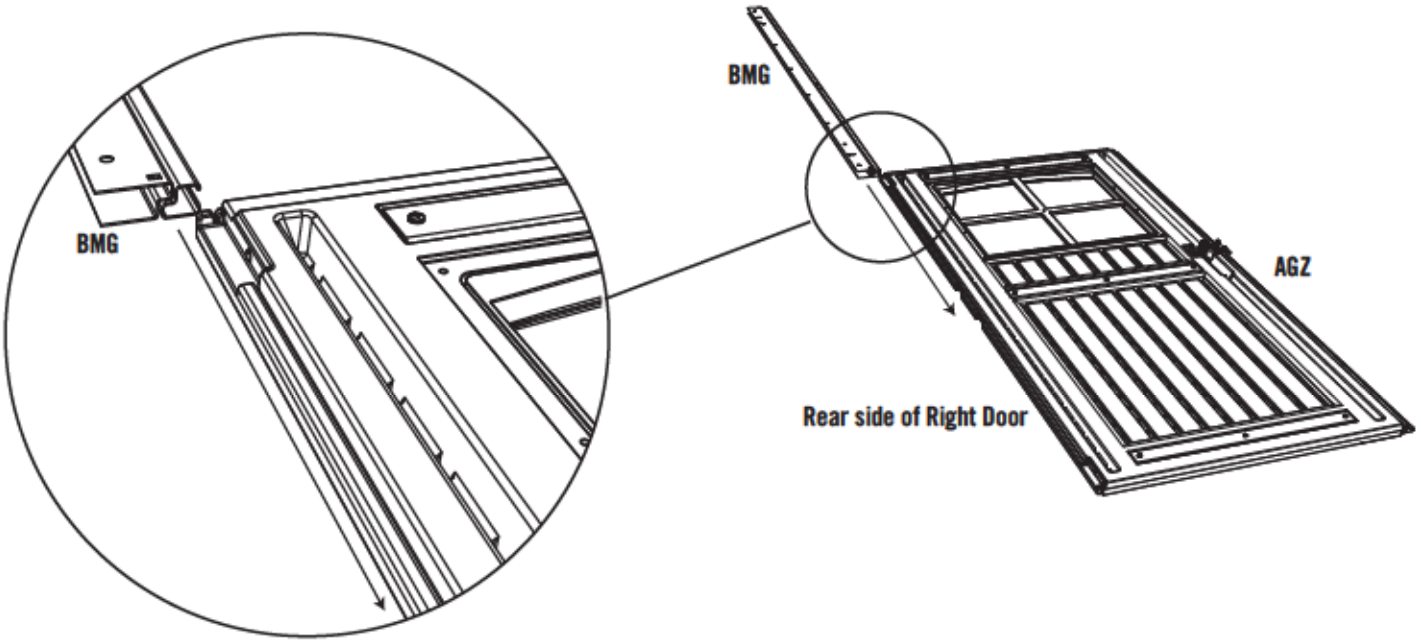


## SEC 10.8

Align the holes in the Right Hinge Assembly with the notch in the Right Door, and secure the Right Hinge Assembly to the Right Door using the required hardware.

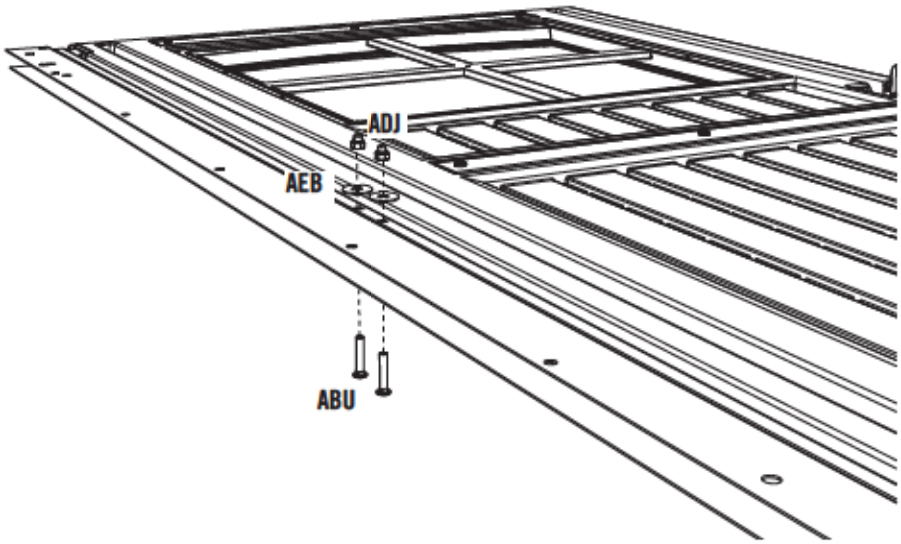

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 10



**BBL** (x3)



**AEB** (x1)

**SEC 10.9**

Slide the Right Hinge Assembly over a **Corner Door Frame (BLJ)** and align the holes, as shown.

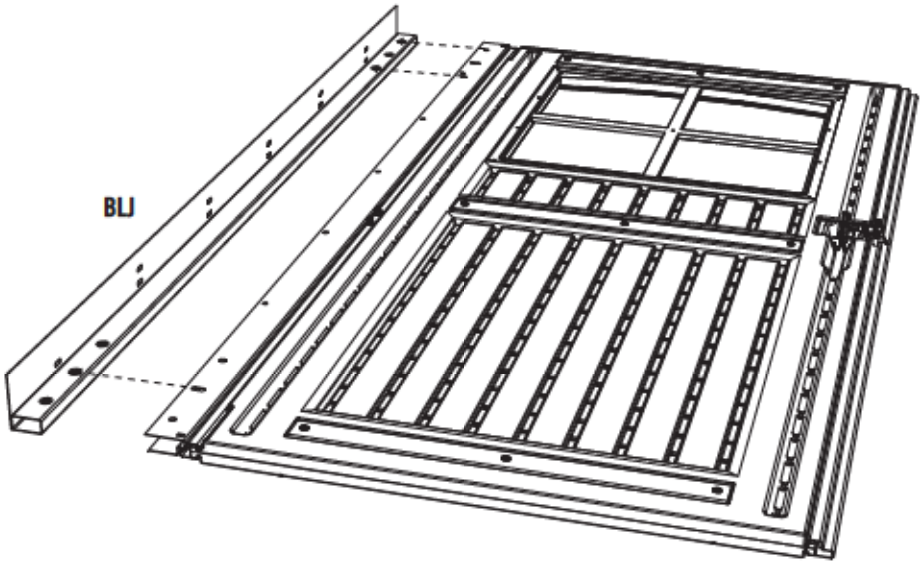


**SEC 10.10**

Secure a **Corner Frame Bracket (BLI)** to the Corner Door Frame and Right Hinge Assembly using the required hardware.

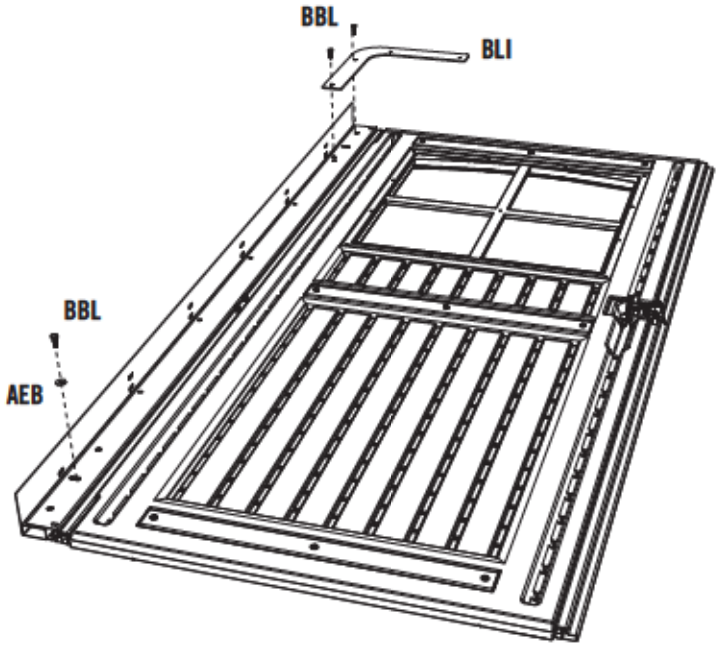

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 10

**ADJ** (x4)



**ACA** (x4)

**SEC 10.11**

Slide the **Long Glider Track (BLL)** next to the **Short Glider Track (BLM)**.

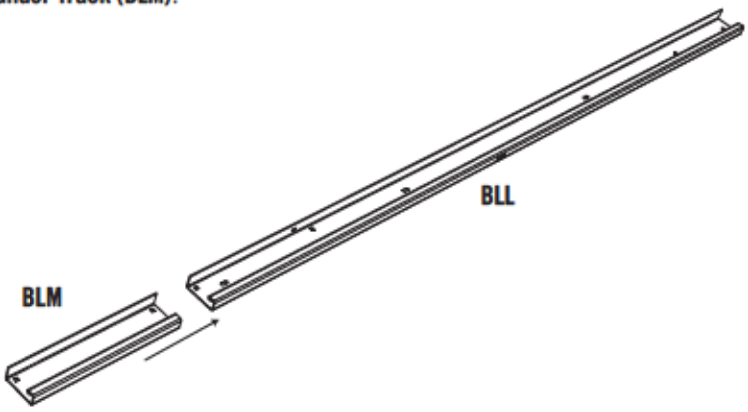


**SEC 10.12**

Align the square holes in the two Tracks with the square holes in **Glider Track Extension (BLN)** and connect the three pieces using the required hardware.

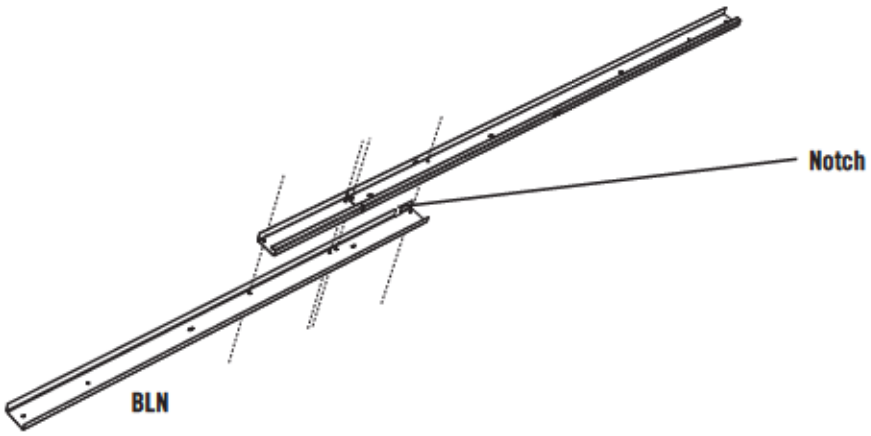


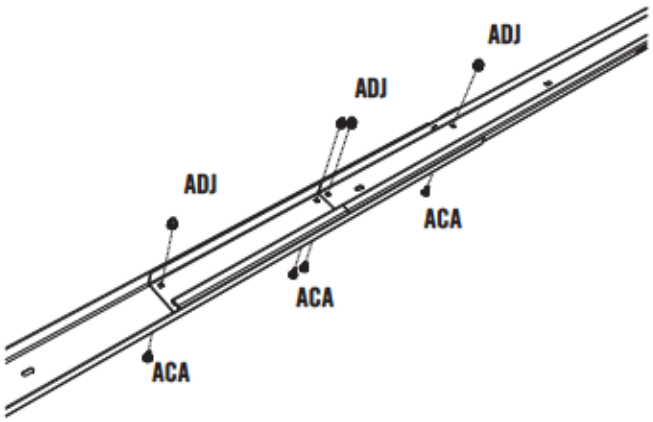

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 10



**BBM** (x4)

**SEC 10.13**

Place the Glider Track Assembly on the Corner Frame Brackets, as shown. The Long and Short Glider Tracks go over the Left and Center Doors.

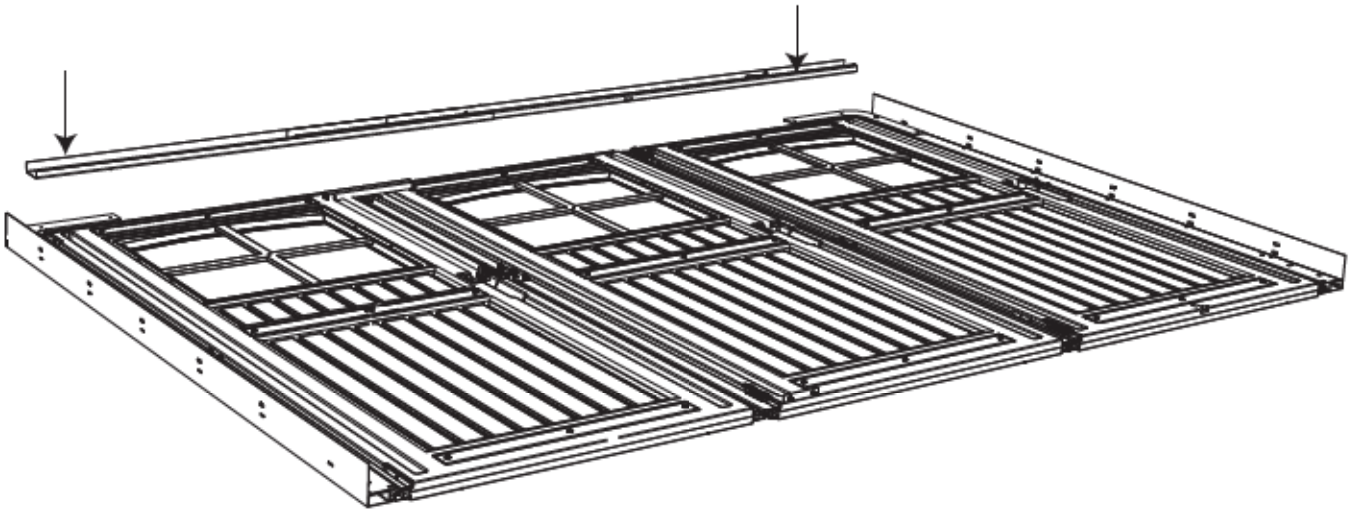

**SEC 10.14**

Connect the right side of the Top Door Frame Assembly to the right Corner Bracket using the required hardware. Connect the left side of the Top Door Frame Assembly and the **Carriage Latch (BBN)** to the left Corner Frame Bracket using the required hardware.

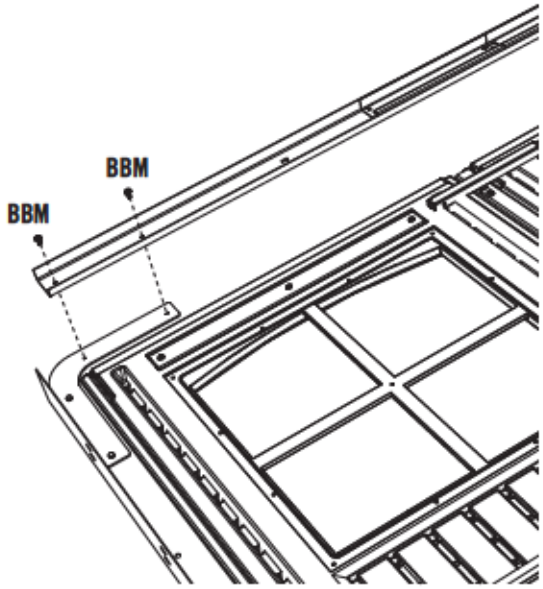


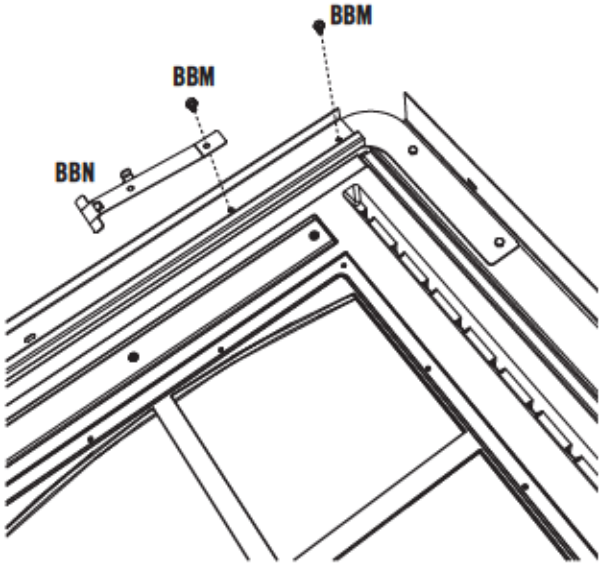

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE





**AID** (x1)
(Not to scale)

**ADJ** (x2)



**BBF** (x2)

**BBE** (x2)
(Not to scale)

## SEC 10.15

Connect both **Carriage Wheels (BBE)** to the **Carriage Bracket (BBK)** to form the Carriage Assembly using the required hardware. **Do not overtighten.**

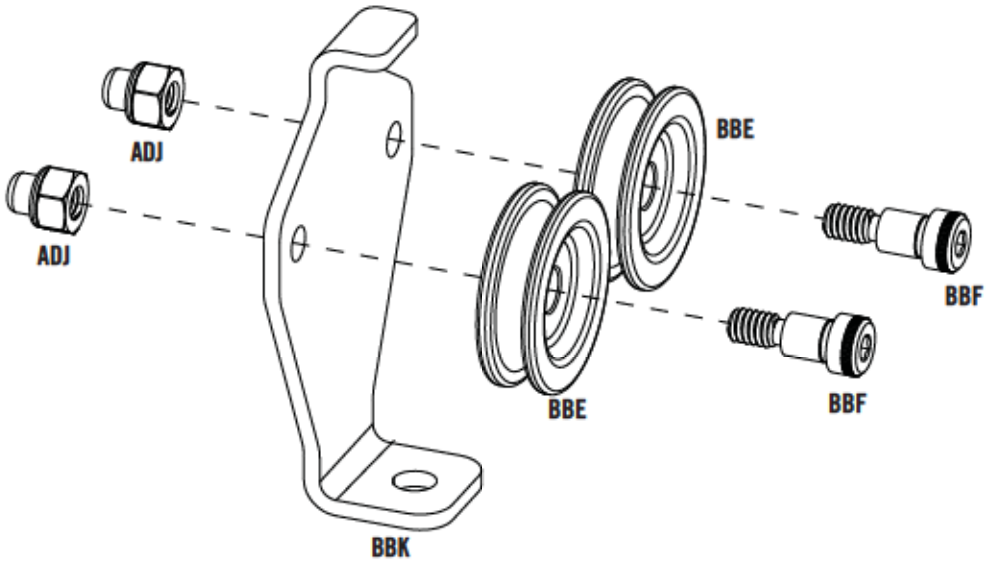


## SEC 10.16

Place the Carriage Wheels into the Header Frame Track Assembly.

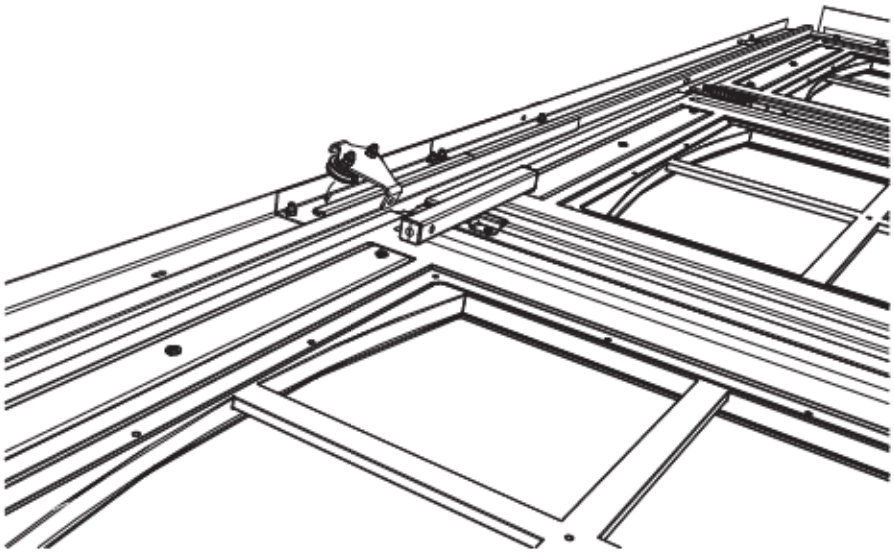

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 10

**5/16"** (x2)


**CJR** (x2)
(Not to scale)


**BBG** (x1)

**ADJ** (x4)


**ACA** (x4)

**AAV** (x2)

## SEC 10.17

Connect the Carriage Bracket to the Extended Door Brace using one (1) **5/16" x 2 1/2" Hex Bolt (BBG)** and two (2) **5/16" Jam Nuts (AAV)**. Place one (1) Jam Nut above the Carriage Bracket and one (1) below.

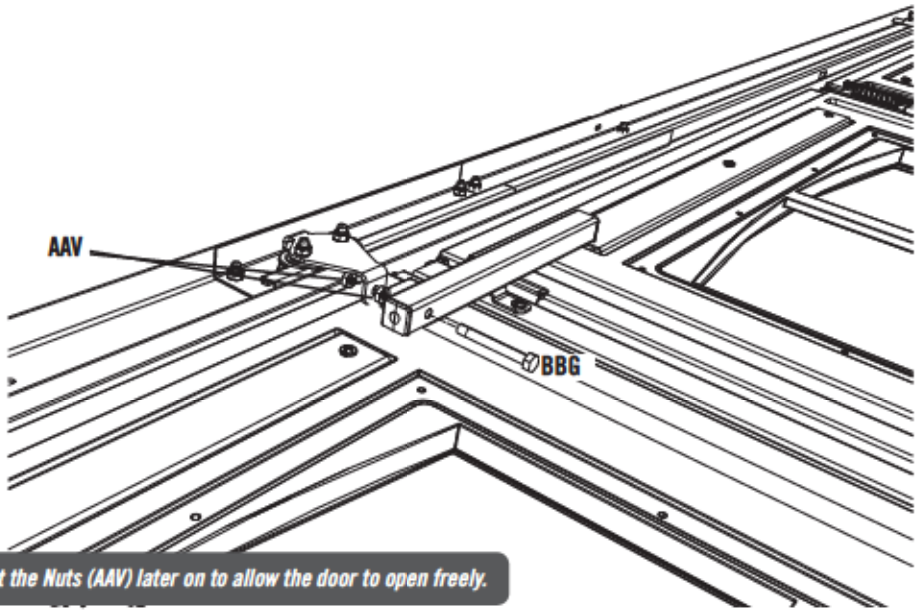


! *Note: You may need to adjust the Nuts (AAV) later on to allow the door to open freely.*

## SEC 10.18

Connect a **Door Frame Support Bracket (CJR)** to the bottom of the left **Corner Door Frame (BLJ)** using two (2) **1/4" x 1/2" Carriage Bolts (ACA)** and two (2) **1/4" Cap Nuts (ADJ). Repeat this step for the right Corner Door Frame.**

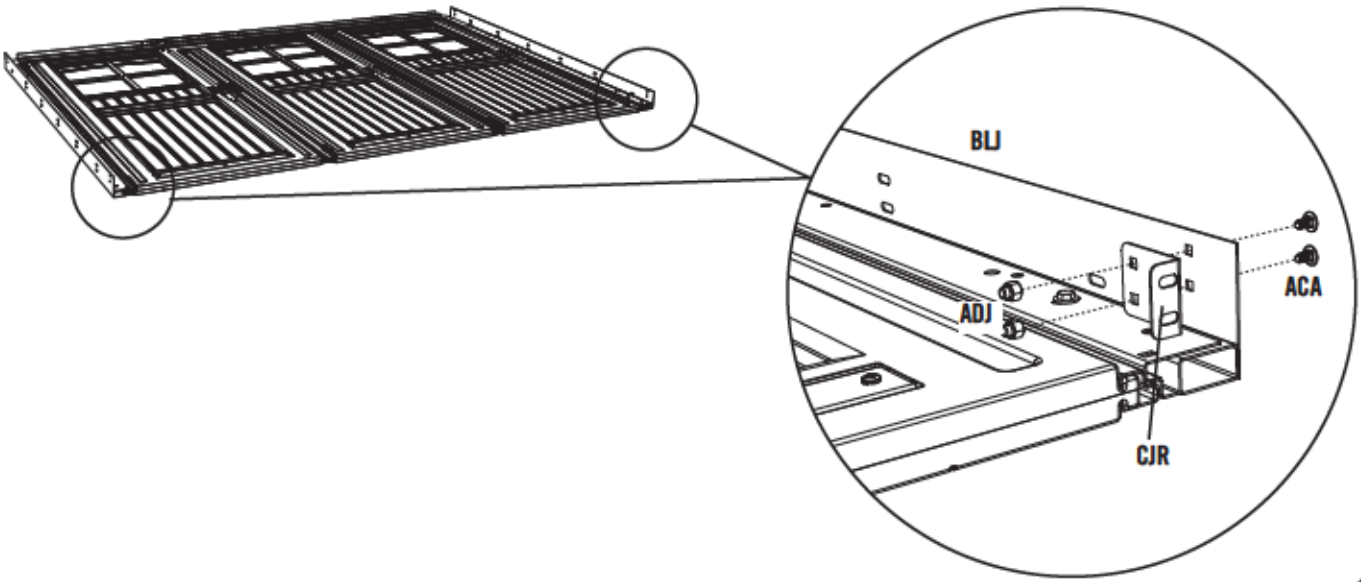

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**ADZ** (x5)

**SEC 10.19**

### AT LEAST TWO ADULTS REQUIRED FOR STEPS ON THIS PAGE

Place the bottom of the Door/Frame Assembly next to the front Floor Panels of the shed, and lift the Door/Frame Assembly up in place.

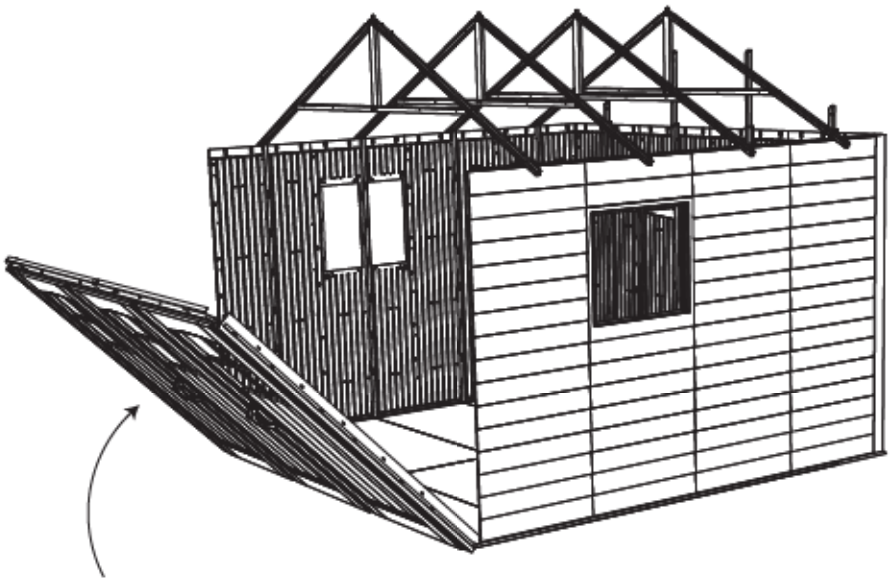

**SEC 10.20**

There are two columns of holes along the Corner Frames. Align the column of five (5) holes (Column 2) in the right Corner Frame with those near the end of the Wall Panel. While at least one adult holds the Door/Frame Assembly in place, connect the right Corner Frame to the Wall Panel using five (5) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

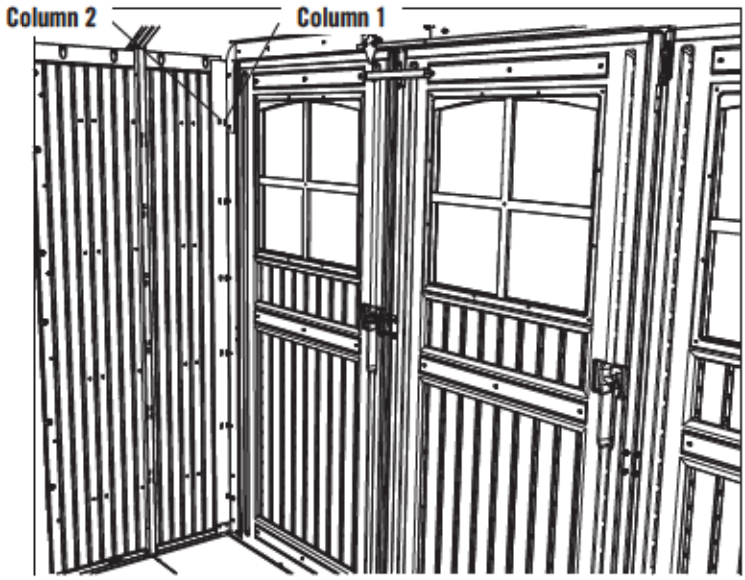


! *Note: Use the second column of holes in from the Right Door.*

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE


**ABU** (x2)

**ADJ** (x2)

**ADZ** (x6)


**AEB** (x2)

## SEC 10.21

### AT LEAST TWO ADULTS REQUIRED FOR THIS STEP

There are two columns of holes along the Corner Frames. Align the column of six (6) holes (Column 1) in the left Corner Frame with those near the end of the Wall Panel. While at least one adult holds the Door/Frame Assembly in place, connect the left Corner Frame to the Wall Panel using six (6) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

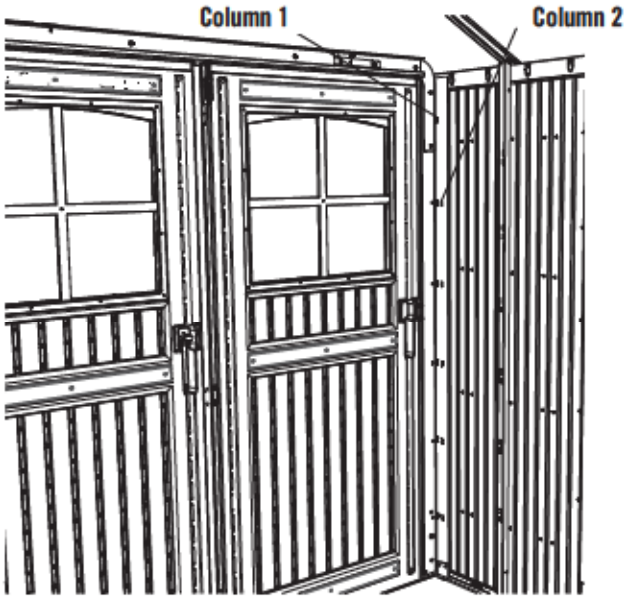


! *Note: Use the first column of holes in from the Left Door.*

## SEC 10.22

Align the holes in the Door Hinge End Channel with the notch in the Center Door and secure the Center Door to the Hinge using the required hardware.

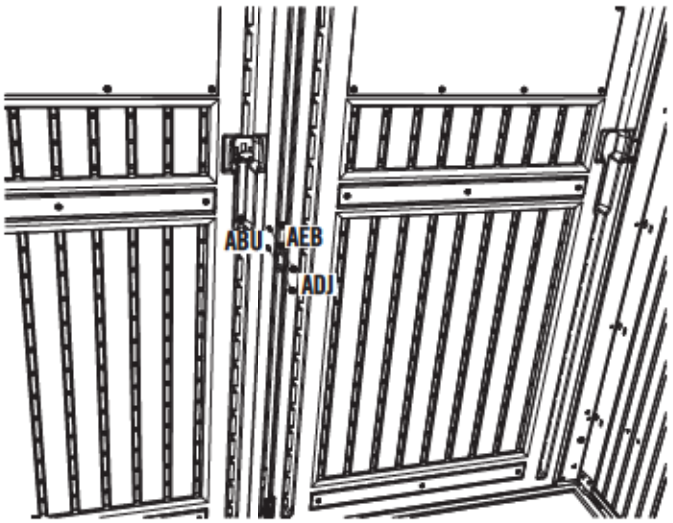

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**ADX** (x4)

**AHL** (x2)



**ADZ** (x2)



**BBJ** (x1)

**SEC 10.23**

Place the two (2) **Dead Bolt Strike Plates (AHL)** in the indentations on the Floor Panels at the locations shown. Orient the Floor Strike Plates so the holes match those in the Floor Panels, and secure with two (2) **#10 x 1/2" Pan-Head Screws (ADX)**. Finally, secure the **4" Floor Strike Plate (BBJ)** at the location shown using two (2) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

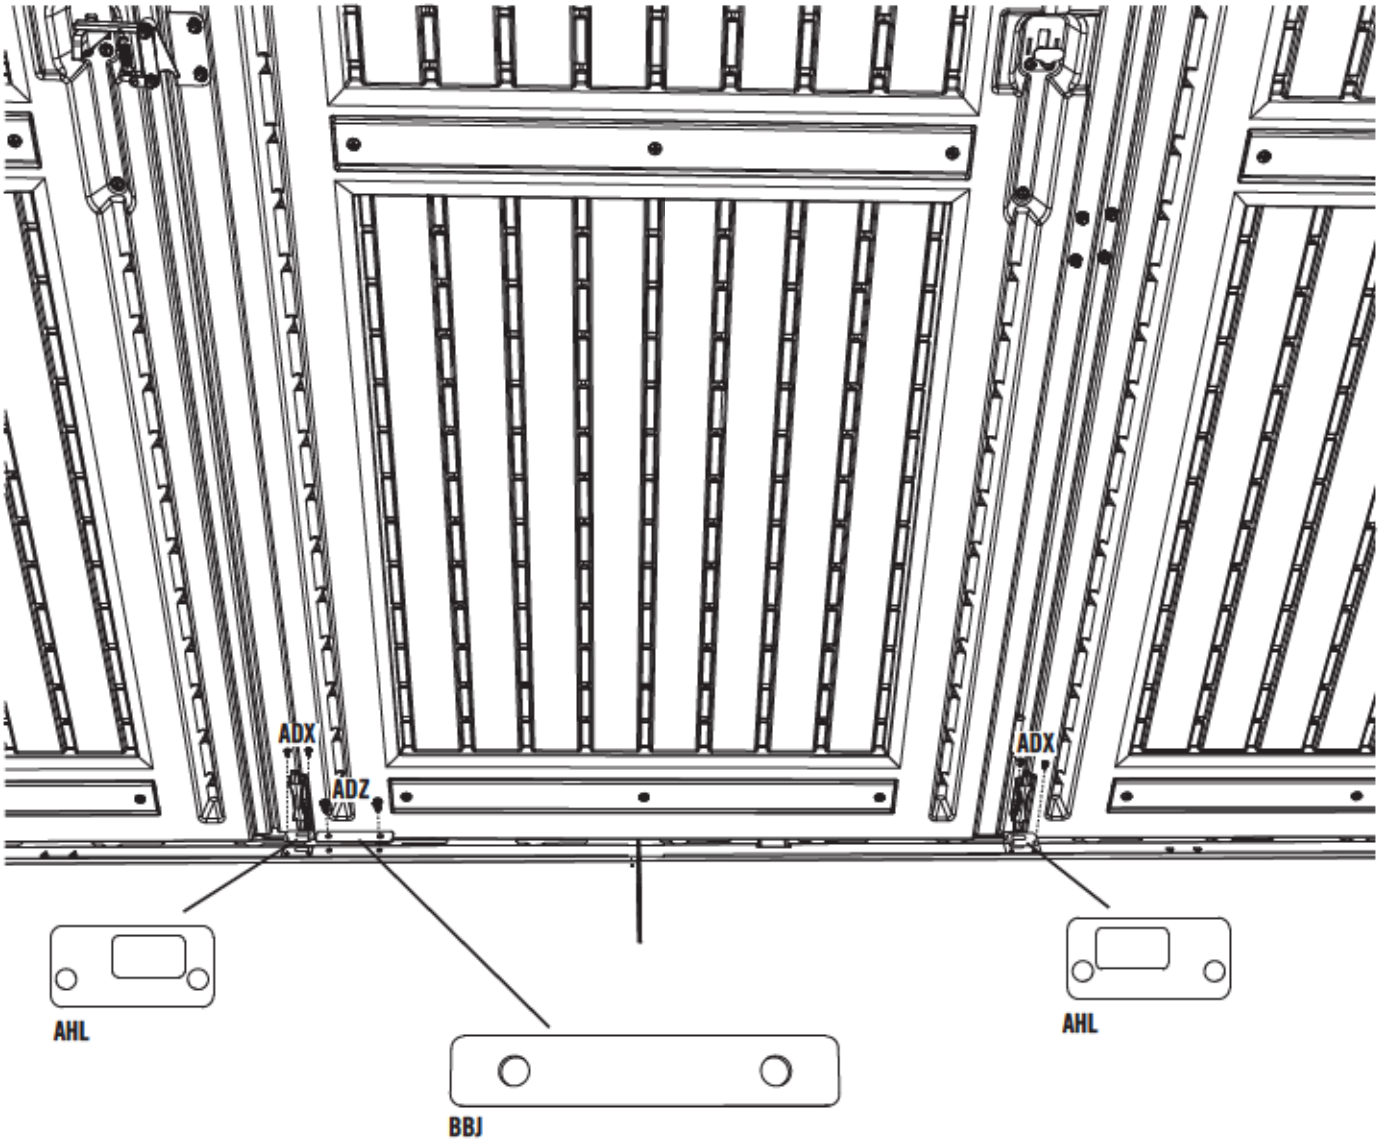

# SEC 11 CORNER TRIM INSTALLATION

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BND

Hardware shown at actual size

**ADX** (x34)
#10 x 1/2" Pan-Head Screw



**ACK** (x4)
#8 x 1" Pan-Head Screw

Hardware shown at 25% of actual size



**AGA** (x12)
Black, Plastic Corner Trim Bracket

**BMH** (x10)
Metal Corner Trim Bracket

## PLASTIC PARTS REQUIRED — LOCATED IN BOX: 4

Part shown at 8% of actual size

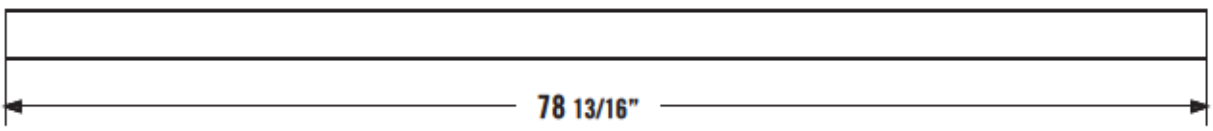

**AQX** (x4)
Corner Trim

## TOOLS REQUIRED

**Phillips Screwdriver**

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**ADX** (x10)

SEC 11

SEC 11.1

## FRONT CORNER TRIM INSTALLATION

Using the required hardware, connect five (5) **Metal Corner Trim Brackets (BMH)** to the front corners of your Shed, as shown.

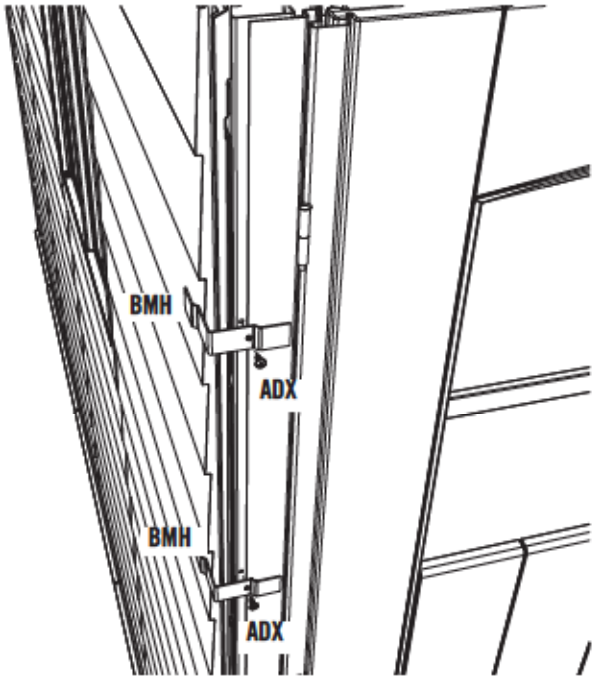


SEC 11.2

Slide a **Corner Trim (AQX)** over the Metal Corner Trim Brackets, as shown.

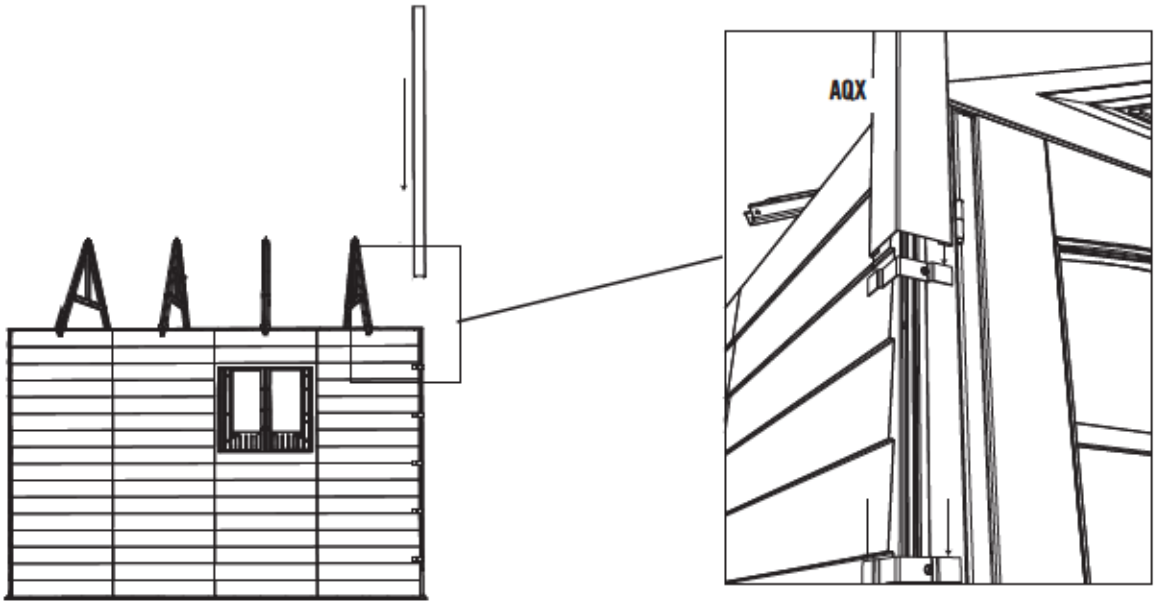

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**ACK** (x2)

**SEC 11.3**

Align the top of the Corner Trim with the top of the Wall Wall Panel and fasten with a **#8 x 1" Phillips Pan-Head Screw (ACK)**. Insert the Screw on the side of the Shed to hide it under the eaves. **Repeat steps 11.1 - 11.3 for the second Front Corner Trim.**

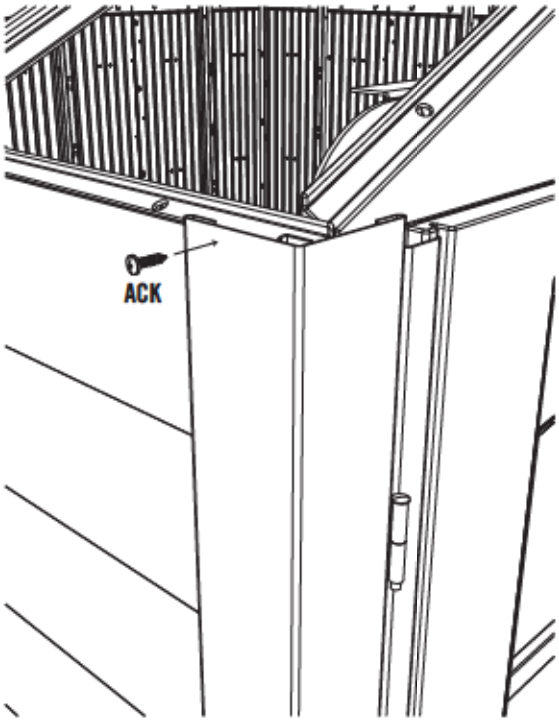

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**ADX** (x24)



**ACK** (x2)

SEC 11

SEC 11.4

### REAR CORNER TRIM INSTALLATION

Snap six (6) **Plastic Corner Trim Brackets (AGA)** to a rear corner of the Shed. Fasten each Bracket with two (2) **#10 x 1/2" Phillips Pan-Head Screws (ADX)**.

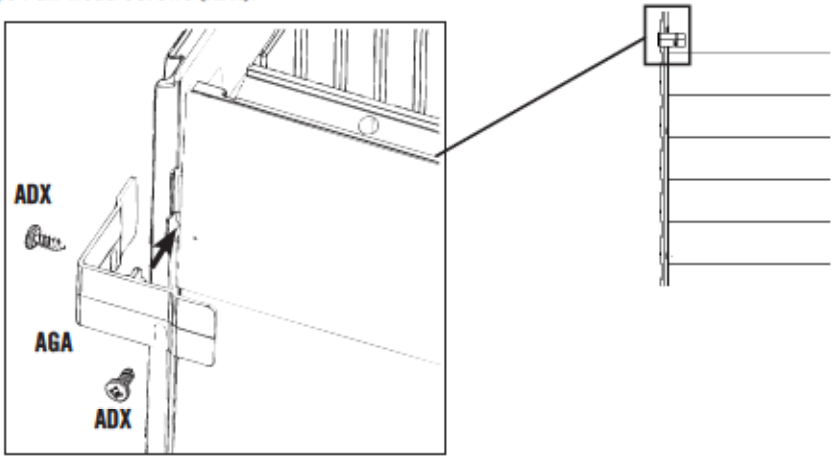


! *Note: The tab on the Trim Brackets fit into the six screw indentations along each corner of the Shed.*

SEC 11.5

Slide a **Corner Trim (AQX)** onto the Plastic Corner Trim Brackets. Align the top of the Corner Trim with the top of the Wall Panel and fasten with a **#8 Phillips Pan-Head Screw (ACK)**. Insert the Screw on the side of the Shed to hide it under the eaves. **Repeat steps 11.4 - 11.5 for the second Rear Corner Trim.**

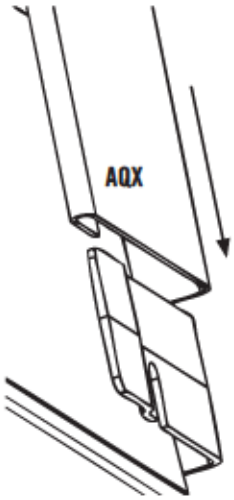


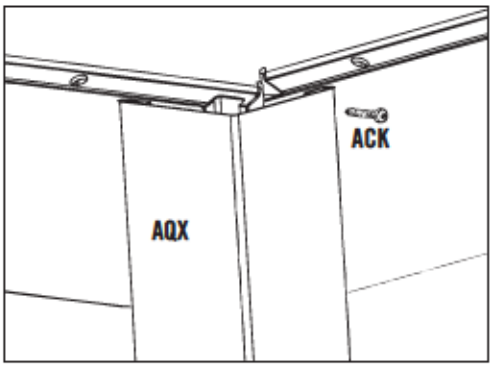


**⚠ WARNING**

Use extreme caution when standing on ladders to perform assembly steps. Follow all warnings and cautions on the ladder. Failure to follow all of these instructions and warnings could lead to serious personal injury or property damage.

# SEC 12 DOMED SKYLIGHT ASSEMBLY

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BEC

Hardware shown at actual size (*Unless noted otherwise)



**ACR** (x24)
#10 x 5/8" Carriage Bolt

**ADK** (24)
#10 Cap Nut

**AEE** (24)
#10 x 1/2" Flat Washer

**AHI** (x2)
Butyl Tape

## PLASTIC PARTS REQUIRED — LOCATED IN BOXES: 2, 3

Part shown at 4% of actual size

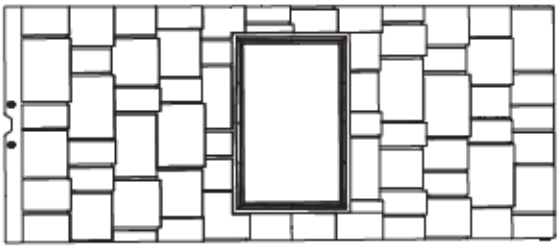

**AHB** (x2)
Roof Panel for Domed Skylight

Part shown at 8% of actual size

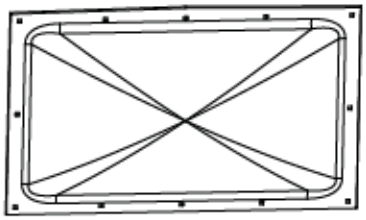

**AGB** (x2)
Domed Skylight

## TOOLS REQUIRED

**Phillips Screwdriver**

**3/8" Wrench**

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**AHI** (x2)
(Not to scale)

## SEC 12.1 DOMED SKYLIGHT ASSEMBLY

Use a plain screwdriver to gently remove any excess plastic from the twelve holes in the **Roof Panel for Domed Skylight (AHB)**. **It's important that the hole stay square; try not to round the corners of the edges of the holes.** Stick the end of the **Butyl Tape (AHI)** over the groove and top, left hole of the Roof Panel for Domed Skylight as indicated below. Move to the right and over the groove covering all the holes along the top of the opening. Once the top, right corner and hole are covered, cut the Butyl Tape. Run your finger along the paper backing pressing down slightly to remove any gaps or bubbles between the Butyl Tape and the groove. Remove the paper backing from the piece of Butyl Tape you just applied. Overlap the end of the roll of Butyl Tape with the end you just cut and apply the Butyl Tape over the holes along the groove on the right of the opening. Continue applying the Butyl Tape in this fashion until all holes have been covered and the ends overlap.

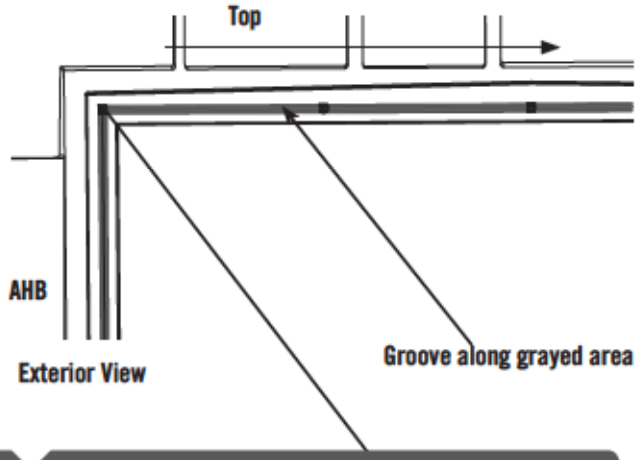


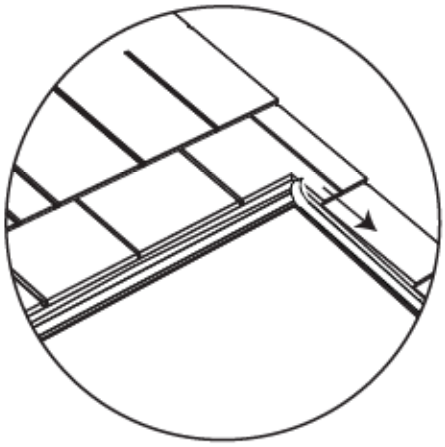

! *Note: Use a screwdriver to remove any excess plastic from all holes in Panel.*

! *Note: Butyl Tape must cover all twelve holes.*

## SEC 12.2

Remove the protective plastic film from **both** sides of the **Domed Skylight (AGB)**. Carefully align the holes in the Domed Skylight with those in the Butyl Tape. Set the Domed Skylight over the opening in the Roof Panel for Domed Skylight. Press down and verify there are no gaps or bubbles between the Butyl Tape and the Domed Skylight.

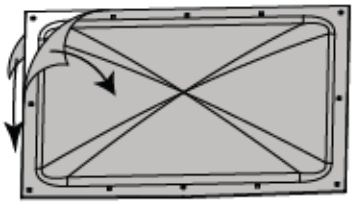

**AGB** (x2)

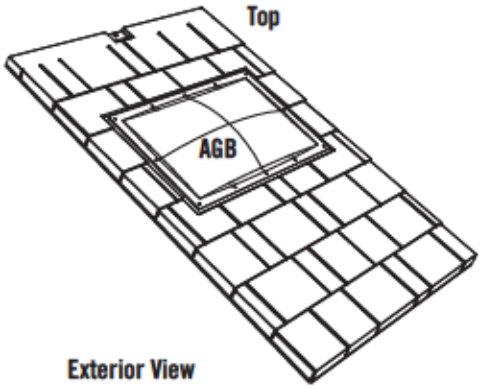

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 12



**ACR** (x24)

**ADK** (x24)

**AEE** (x24)

**SEC 12.3**

Insert one (1) **#10 x 5/8" Carriage Bolt (ACR)** through each hole in the Domed Skylight. Press the Bolt through the Butyl Tape and through the Roof Panel for Domed Skylight.

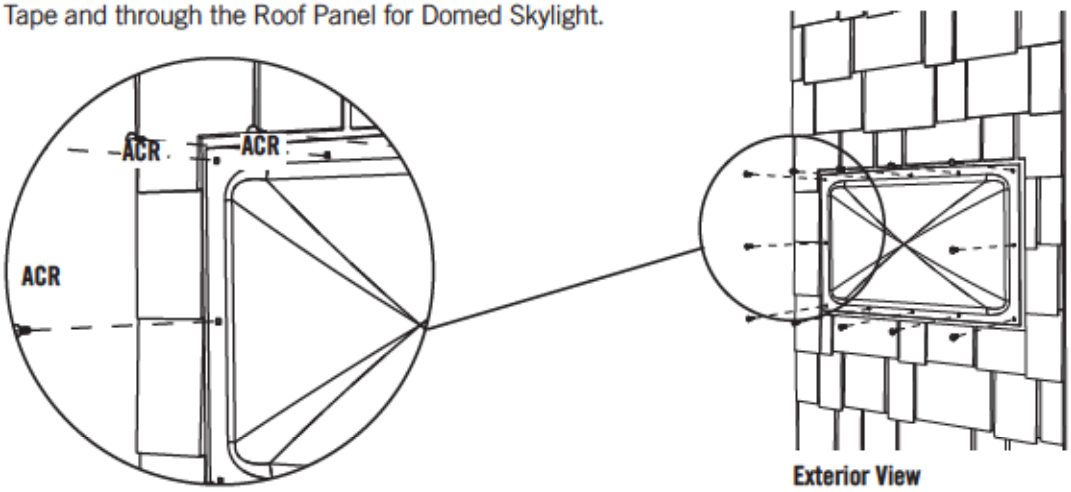


**Exterior View**

**SEC 12.4**

Secure the Domed Skylight to the Roof Panel with one (1) **#10 Flat Washer (AEE)** and one (1) **#10 Cap Nut (ADK)** for each Carriage Bolt. Set Skylight/Panel Assembly aside.

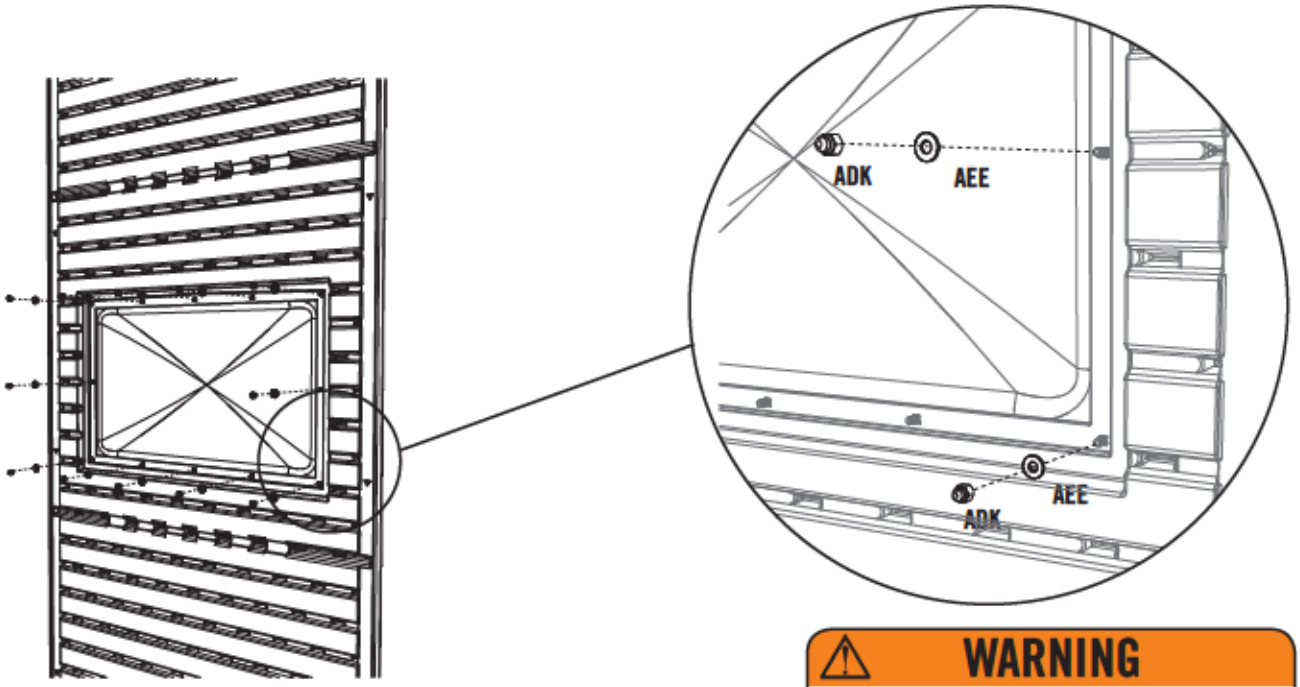


**Interior View**

**⚠ WARNING**

Do not overtighten the Cap Nut. If the end of the Bolt breaks through the plastic cap, call our Customer Service Department. Exposed threads on the end of the Bolt may cause serious injuries.

# SEC 13 GABLE INSTALLATION

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BMZ

Hardware shown at actual size

**ADZ** (x38)
1/4" x 5/8" Phillips Pan-Head Screw

## PLASTIC PARTS REQUIRED — FROM SECTION: 6

Parts shown at 4% of actual size

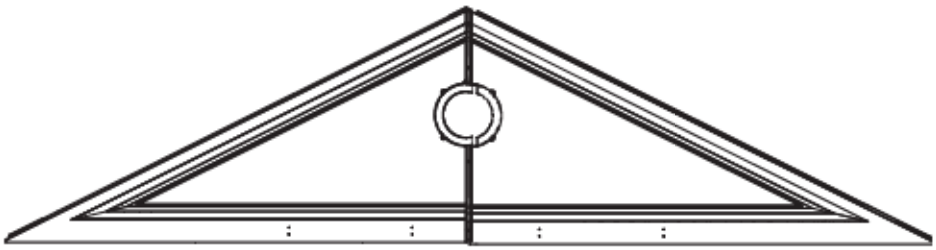

Front Gable Assembly
(Assembled earlier)

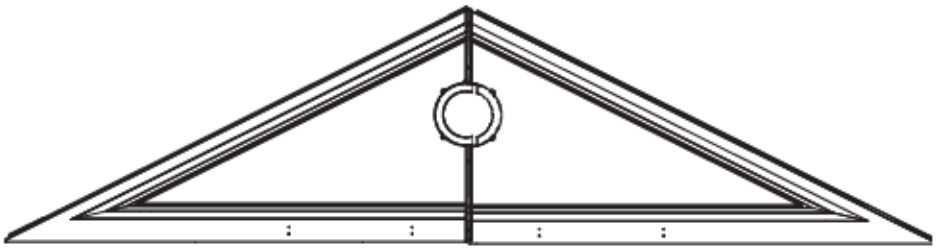

Rear Gable Assembly
(Assembled earlier)

## TOOLS REQUIRED



**Phillips Screwdriver**

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**ADZ** (x26)

SEC 13.1

### REAR GABLE INSTALLATION

Secure the Rear Gable to the rear Wall and Vertical Extension Channels using twenty-two (22) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ).**

***Note: Tighten the Screws on the Vertical Extension Channels after the Gable is installed.***

SEC 13.2

### FRONT GABLE INSTALLATION

Secure the Front Gable to the top of the Door Frame as shown, and secure with four (4) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)** at the locations shown.

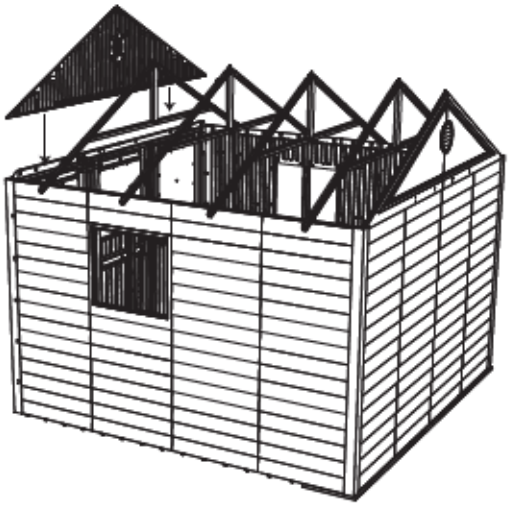

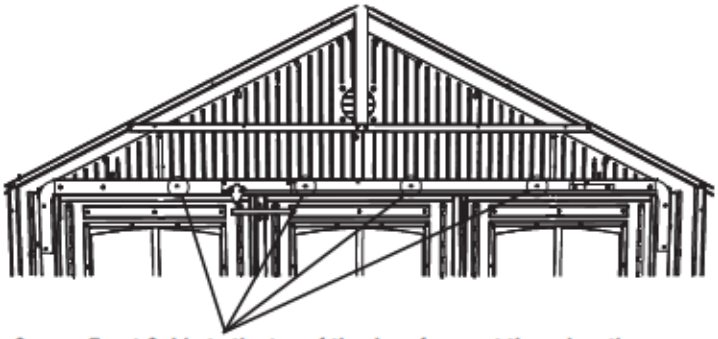

**Secure Front Gable to the top of the door frame at these locations.**

# SEC 14 GABLE BRACE & ROOF INSTALLATION

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BNH

Hardware shown at actual size (*Unless otherwise noted)

**ADZ** (x185) 1/4" x 5/8" Pan-Head Screw
(Not all are used)

**ACJ** (x12) #10 x 5/8" Pan-Head Screw



**AED** (x12) #10 x 1" Fender Washer

**ADX** (4)
#10 x 1/2" Pan-Head Screw

**ADK** (x1)
#10 Cap Nut



**AJA** (20)* Foam Cube

**ACF** (x1) #10 x 5/16" Pan-Head Screw

## METAL PARTS REQUIRED — LOCATED IN BOXES 1, 2, 3

Parts shown at 8% of actual size




**AFL** (x20) Roof Support Strip




**AFF** (x2)
Gable Truss Brace

## PLASTIC PARTS REQUIRED — LOCATED IN BOXES: 1, 2, 3 AND PARTS & HARDWARE BOX: BNO

Parts shown at 4% of actual size (*Unless otherwise noted)

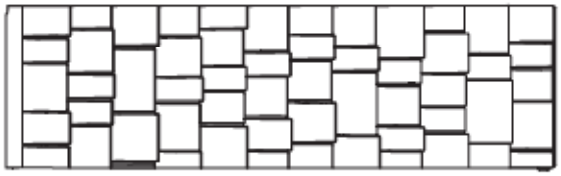

**AGU** (x2) Outer Roof Panel A

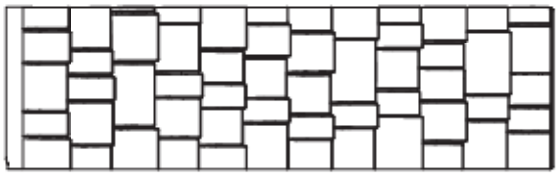

**AGV** (x2) Outer Roof Panel B

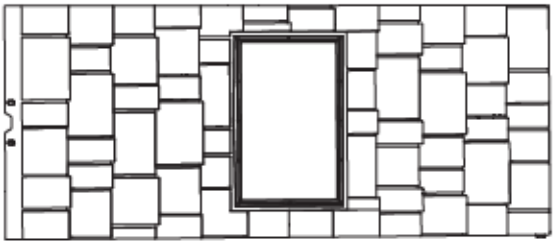

**Roof Panel for Domed Skylight Assembly (x2)**

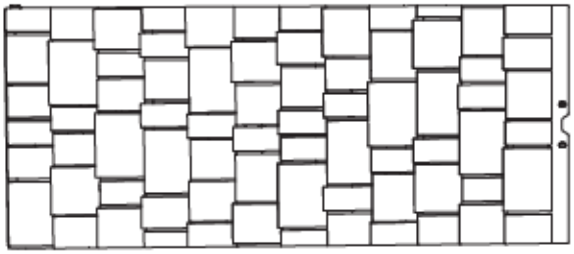

**AGQ** (x4) Center Roof Panel

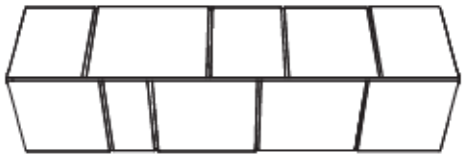

**AFY** (x3)* Center Roof Cap



**AGE** (x2)* End Roof Cap



**AHA** (x2)* Roof Cap Cover

## TOOLS REQUIRED

**Phillips Screwdriver**

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**ADX** (x4)

**ACF** (x1)

**ADK** (x1)

SEC 14

SEC 14.1

## GABLE BRACE INSTALLATION

Install the **Gable Truss Brace (AFF)** between the end Truss and the Rear Gable. You will need to remove the **1/4" x 1 1/2" Hex Bolts (AAK)** and the **1/4" NKE Cap Nuts (ADJ)** from the bottom of the Truss Assembly, and then reattach to the Gable Truss Brace. Connect the Brace directly to the Gable with two (2) **#10 x 1/2" Pan-Head Screws (ADX)**. Repeat this step for the Front Gable, connecting the Gable Brace to the center of the top of the Door Header Channel with one (1) **#10 x 5/16" Pan-Head Screw (ACF)** and one (1) **#10 Cap Nut (ADK)**. You may need to slightly adjust the Gable Truss Brace.

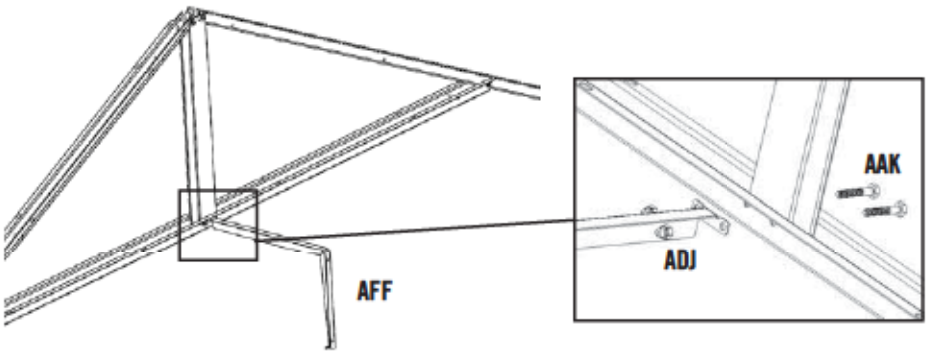


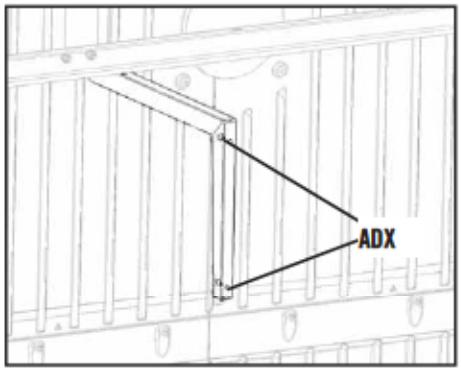


**Rear Gable**

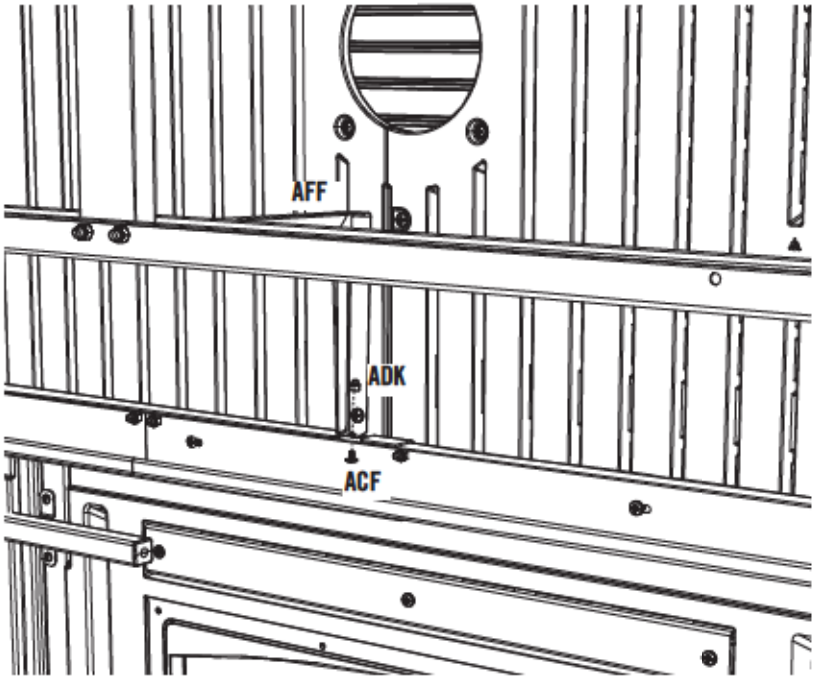


**Front Gable**

**WARNING**

Do not overtighten the Cap Nut.

***Note: There are no pilot holes in the Gable to receive the Screws (ADX). Insert them directly into the plastic.***

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**ADZ** (x24)

SEC 14.2

### ROOF ASSEMBLY

Install **Outer Roof Panels A & B (AGU & AGV)** at the front of the Shed. Always start inserting the **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)** at the top of the Roof Panel.

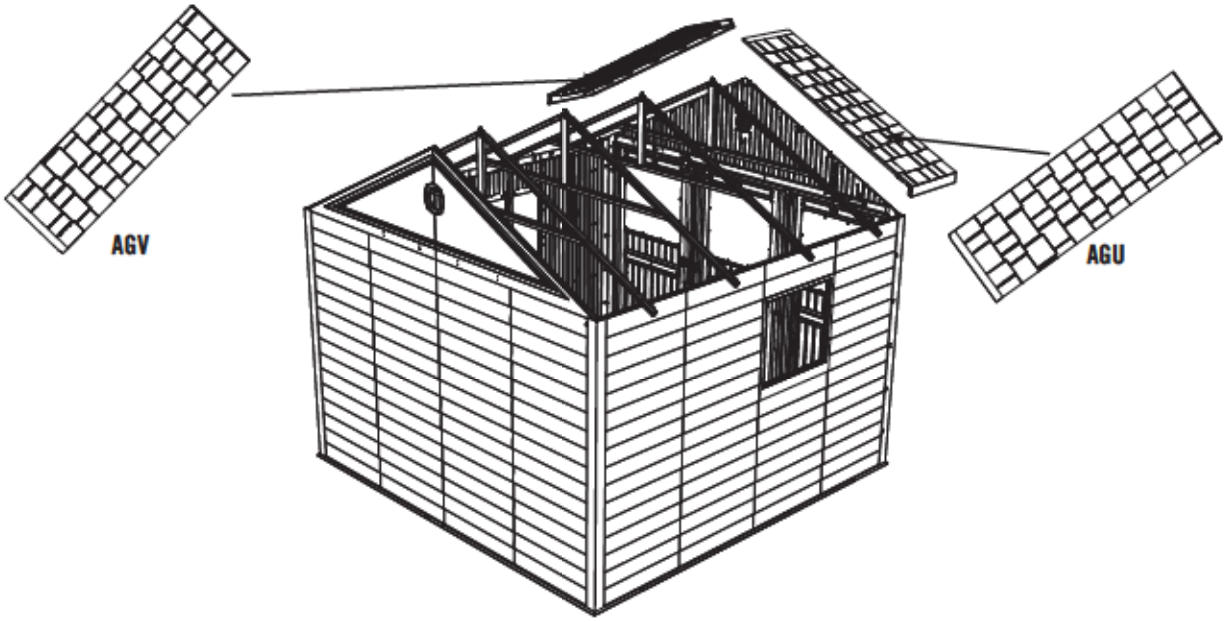


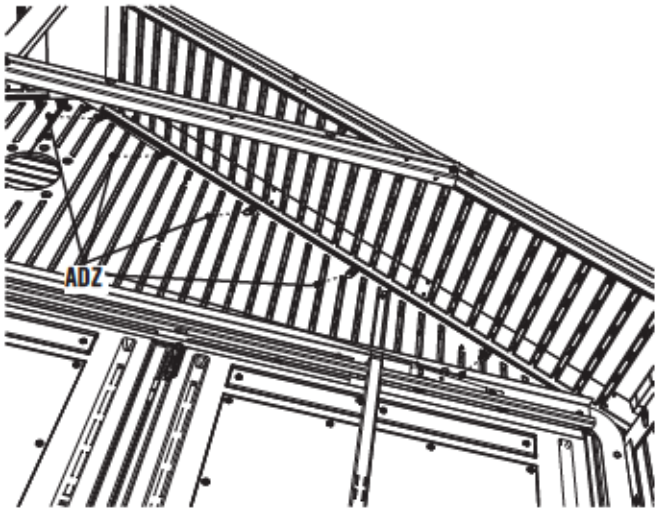


! *Note: This is an interior upward view.*

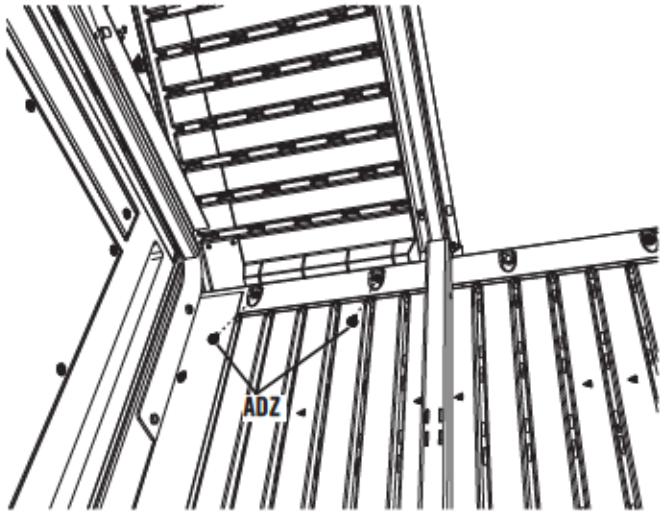


! *Note: This is an interior upward view.*

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**ADZ** (x24)

## SEC 14.3

Install two (2) **Inner Roof Panels (AGQ)** and four (4) **Roof Support Strips (AFL)** to the Shed as shown. **Roof Panels for Skylights (AHB)** can be inserted into any of the center Roof Panel sections.

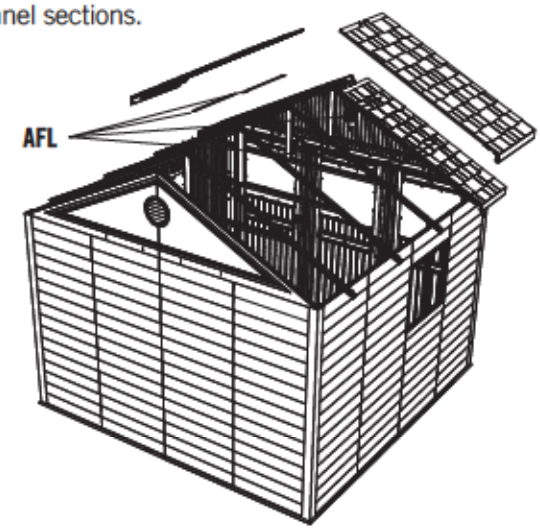


! *Note: This section applies to the two types of Roof Panels: Inner Roof Panel (AGQ) and Roof Panel for Domed Skylight (AHB).*

Fit three **Roof Support Strips (AFL)** (dark gray) into the slots (light gray) in the Center Roof Panels and Roof Panels for Domed Skylight as you put them in place.

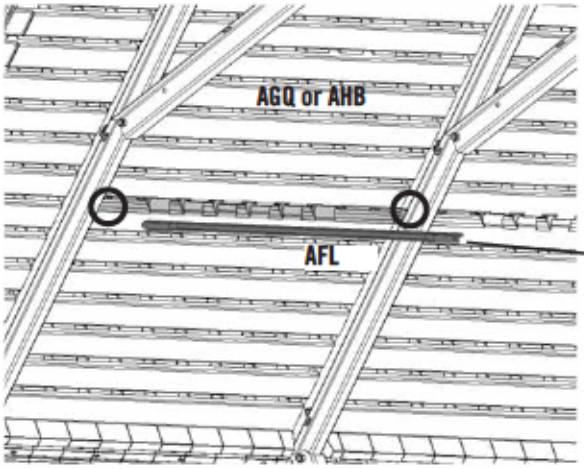


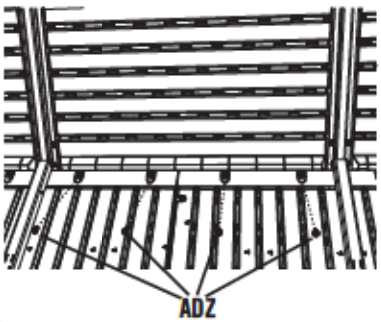


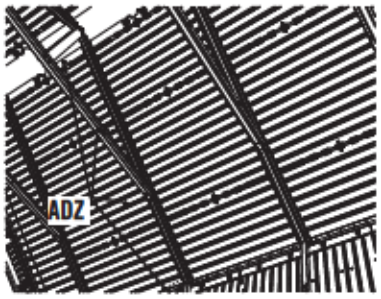


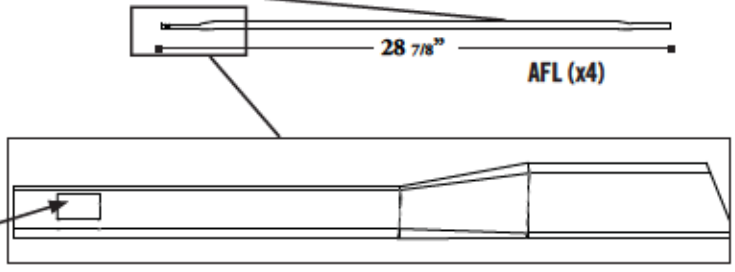


! *Note: The holes in the Roof Support Strips are for manufacturing purposes only.*

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**ADZ** (x72)

SEC 14

**SEC 14.4**

Attach two (2) **Roof Panels for Skylights (AHB)** and six (6) **Roof Support Strips (AFL)** using the required hardware.

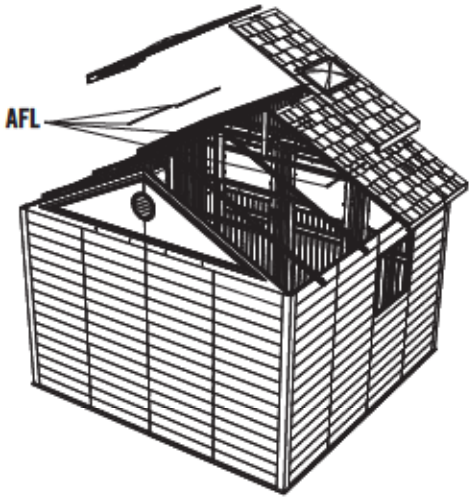


**SEC 14.5**

Position the **Outer Roof Panel A (AGU)** and secure to Gable. Repeat on the other side with **Outer Roof Panel B (AGV)**.

! *Note: Only use a hand screwdriver on this step.*

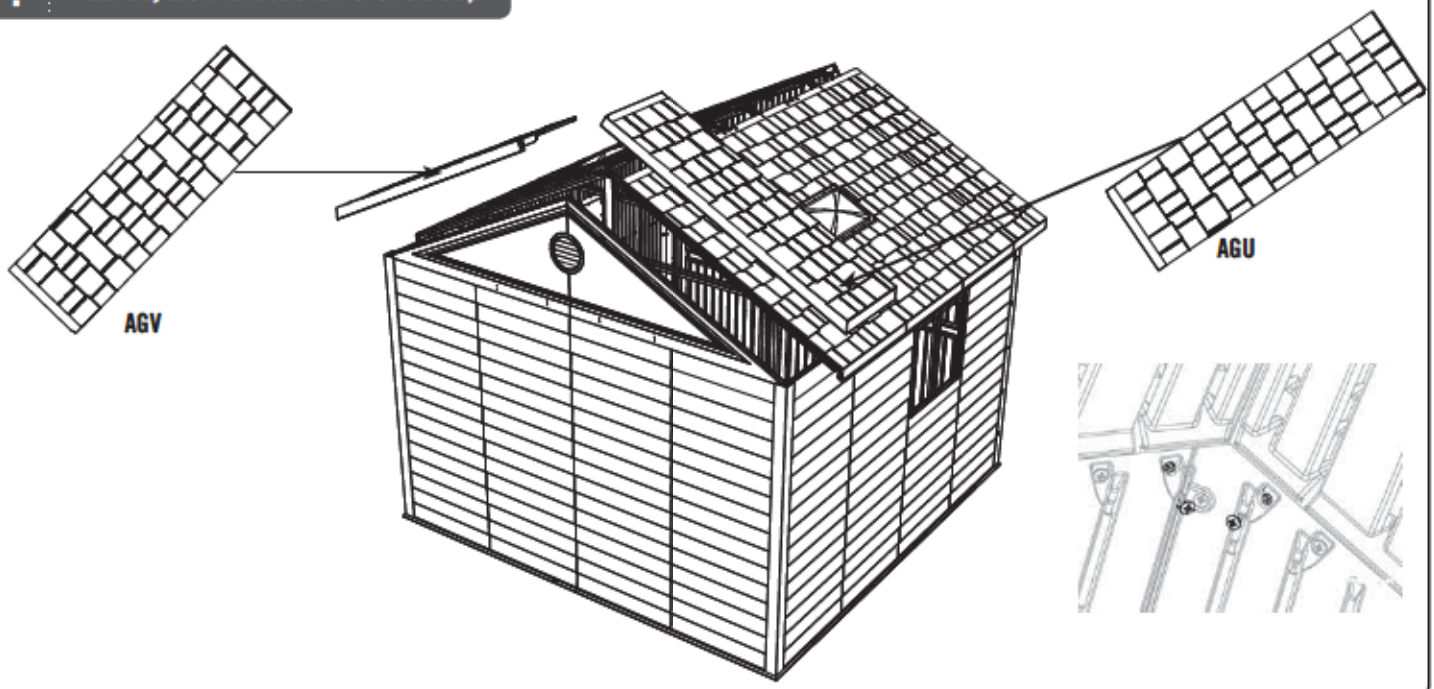

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**ADZ** (x24)

**ACJ** (x12)



**AED** (x12)

## SEC 14.6

Connect the **End Roof Caps (AGE)** and **Center Roof Caps (AFY)** to the Roof and Gables using the required hardware.

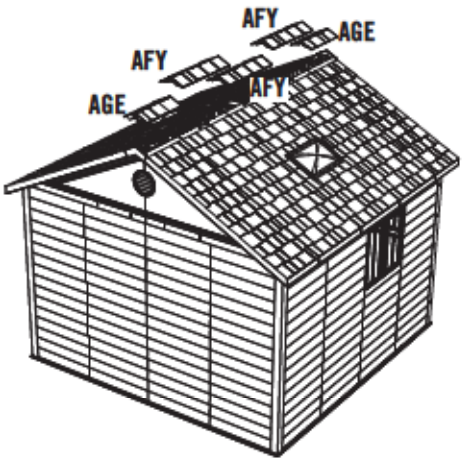


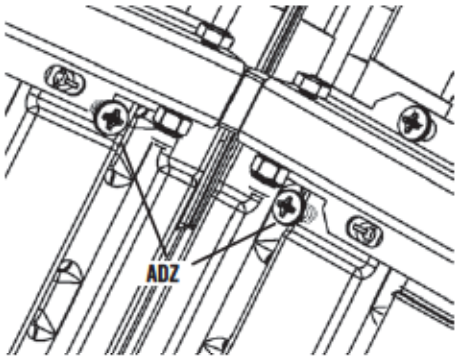


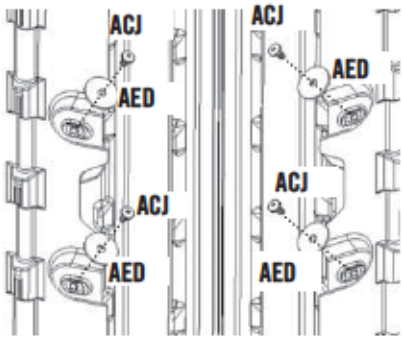

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**AJA** (x20)



**ADZ** (x20)

### SEC 14.7

Install a **Roof Cap Cover (AHA)** at the front and rear of the Shed using two (2) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)** for each Roof Cap Cover.

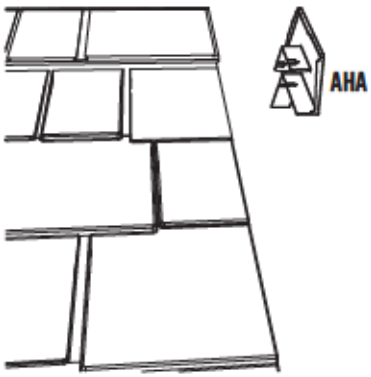


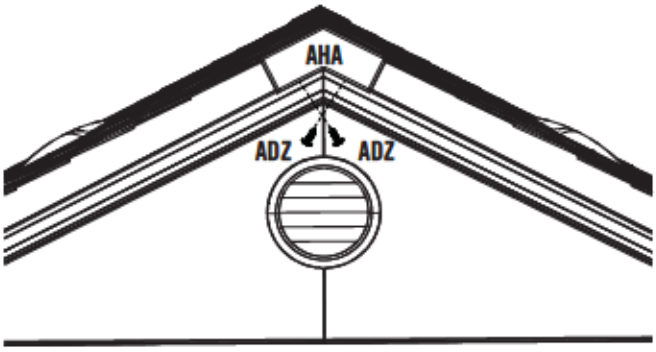


### SEC 14.8

Along the outside edges of the Shed, fasten the Channels to the underside of the Roof Panels (Fig. 1). Insert two **Foam Cubes (AJA)** at each Channel location (Fig. 2).

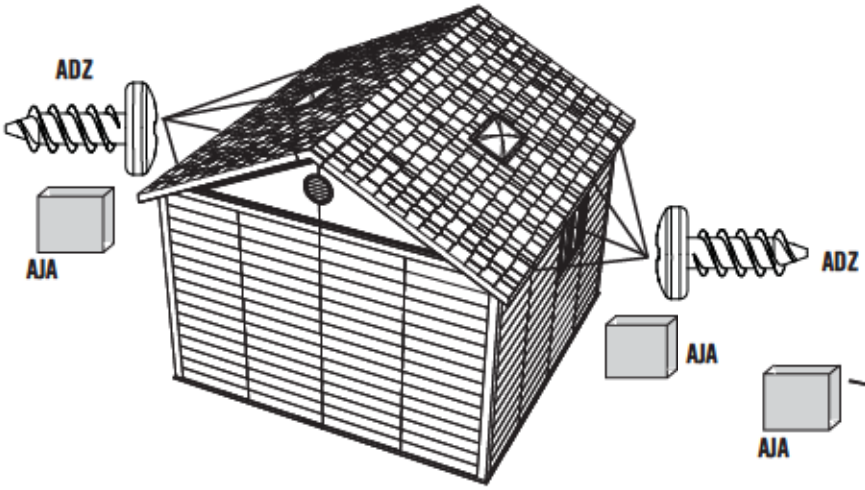


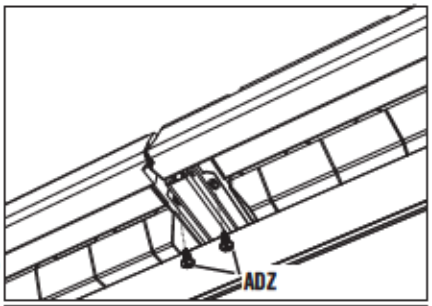


Fig. 1

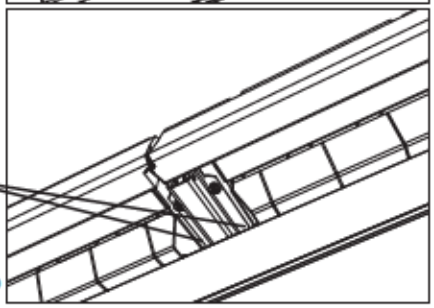

Fig. 2

**Note: Snow Load Kits are available from Customer Service for high snow areas (see back cover).**

**CAUTION**

If more than six (6) inches of snow accumulate on the roof of the shed, carefully remove the snow to avoid possible roof collapse. While standing on the ground, remove the snow from the roof with a broom or snow shovel. Do not stand on the roof to remove snow.

# SEC 15 WINDOW ASSEMBLY & INSTALLATION

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BGU (x2)

Hardware shown at actual size

**ADZ** (x8)
1/4" x 5/8" Pan-Head Screw

**ADW** (x8)
#10 x 3/4" Pan-Head Screw

**ADX** (x44)
#10 x 1/2" Pan-Head Screw

**AEE** (x4)
#10 x 1/2" Flat Washer

**ACF** (x4)
#10 x 5/16" Pan-Head Screw

**ACB** (x8)
#10 x 1 1/4" Pan-Head Screw

**ACD** (x4)
#10 x 3/8" Flat-Head Screw

**ADK** (x4)
#10 Cap Nut

Hardware shown at 25% of actual size

**AIE** (x4)
Mounted Window Stay

**AIN** (x4)
Sliding Window Stay



**AIV** (x4)
Window Stay Bracket

**AIR** (x8)
Window Hinge Tube

Hardware shown at 50% of actual size



**AIU** (x8)
Window Latch Bearing



**AIT** (x8)
Window Latch

## PLASTIC PARTS REQUIRED — LOCATED IN BOXES: 2, 3

Parts shown at 8% of actual size

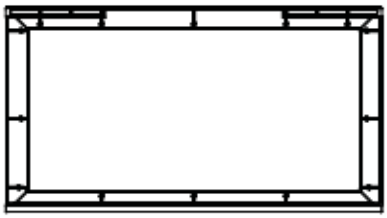

**AHG** (x4)
Window Frame

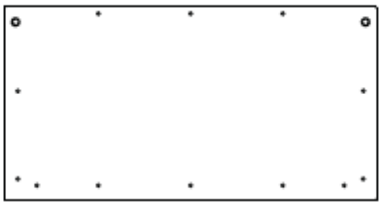

**AHF** (x4)
Window

## TOOLS REQUIRED

**Phillips Screwdriver**

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**AIR** (x4)
(Not to scale)

**SEC 15.1**

Slide **Window Hinge Tubes (AIR)** into the upper and lower hinge holes and fit a **Window Frame (AHG)** over the Hinge Tubes.

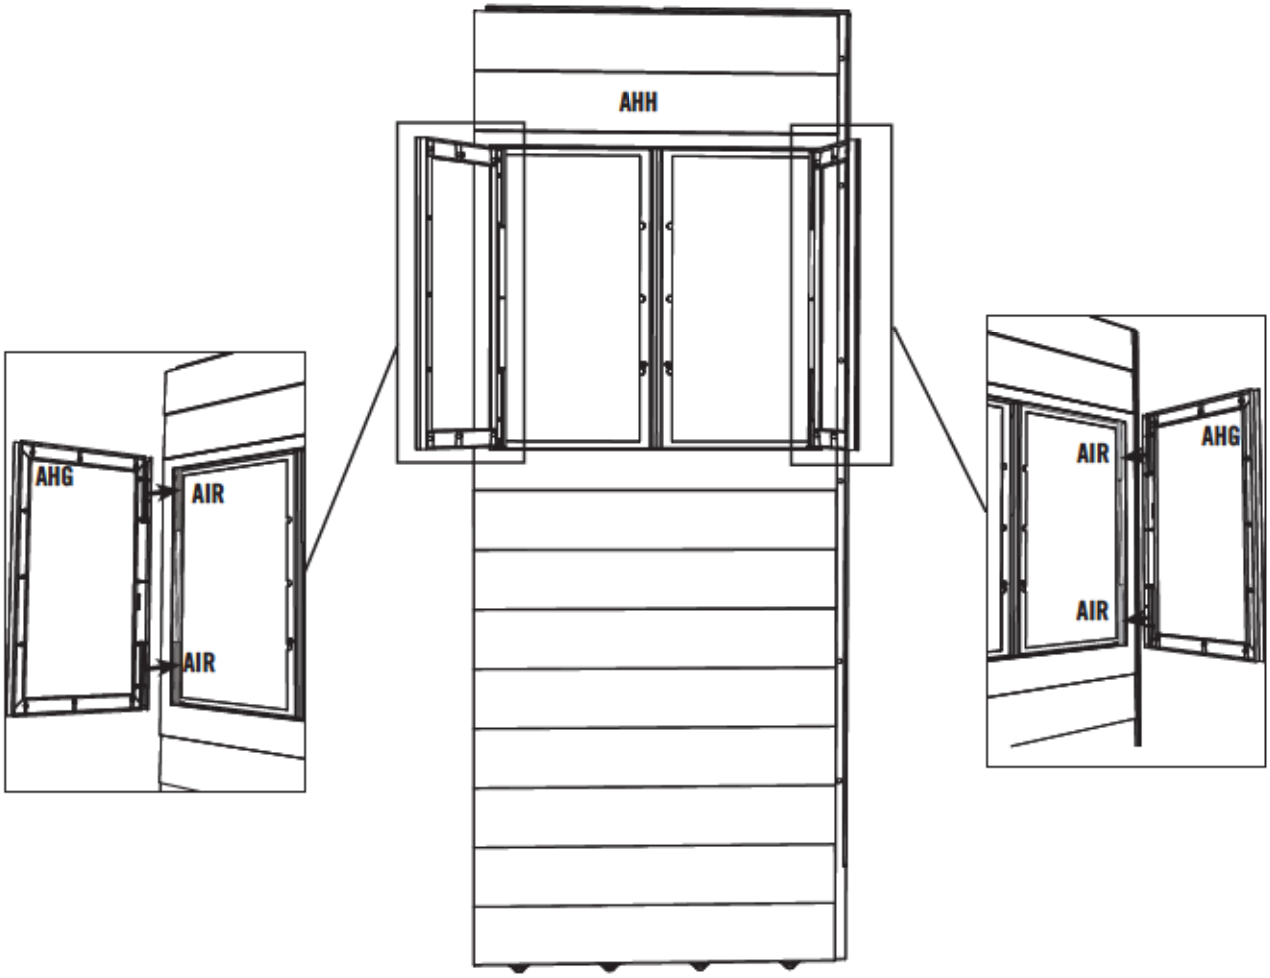

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 15

**ADX** (x20)

SEC 15.2

Place a **Window (AHF)** onto the Window Frame. Fasten the Window to the Frame with **#10 x 1/2" Pan Head Screws (ADX)** in the locations shown.

! *Note: Remove plastic film from both sides of window before installing.*

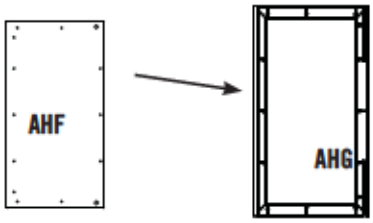


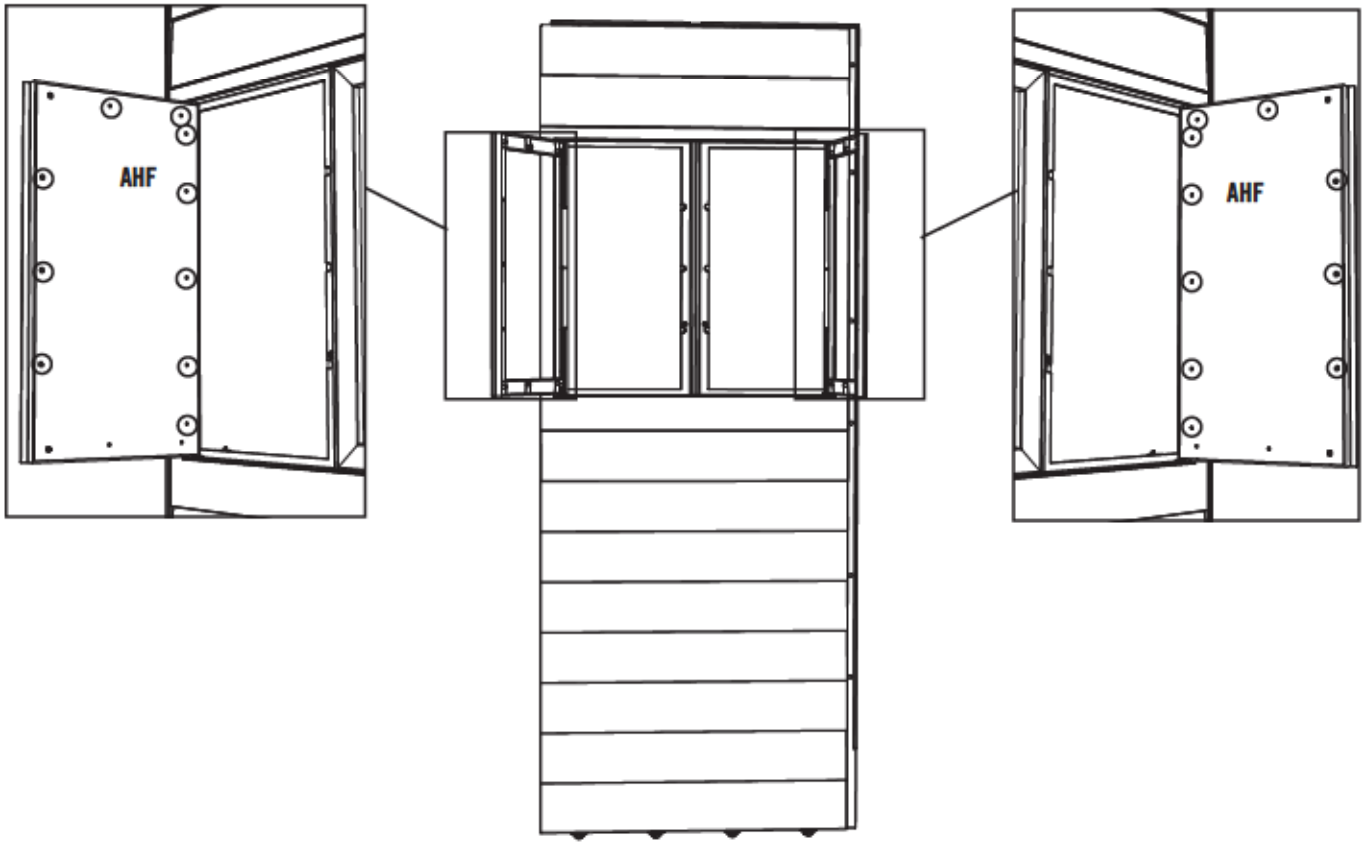


! *Note: Insert Screws into the holes with circles.*

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 15

**AIE** (x2)
(Not to scale)



**ADZ** (x4)

**AIV** (x2)
(Not to scale)

**ADW** (x4)

## SEC 15.3

Attach **Window Stay Brackets (AIV)** to the inside of the **Window Wall Panel (AHH)**.

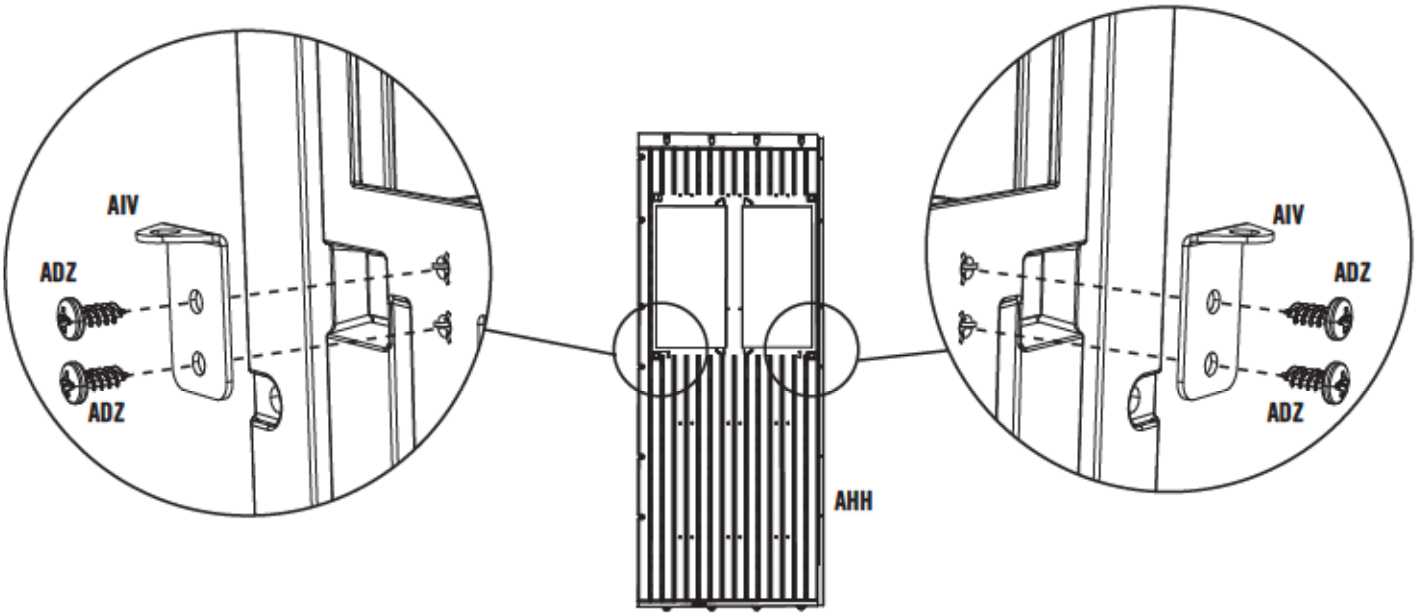


## SEC 15.4

Attach a **Mounted Window Stay (AIE)** to the bottom of the Window Frame.

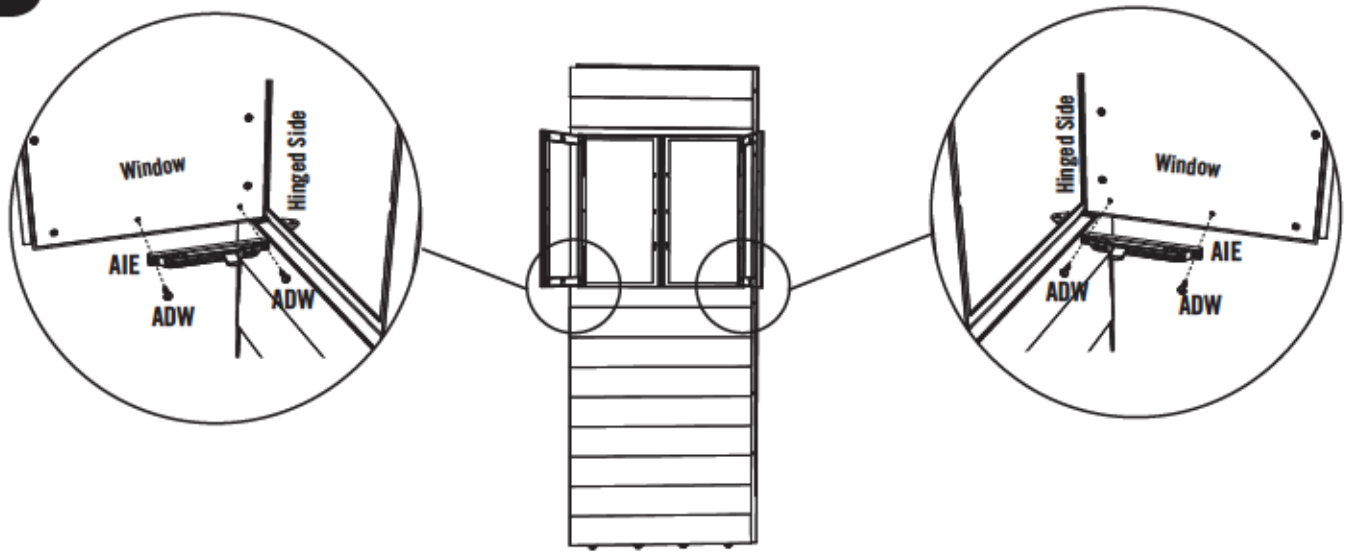

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**AEE** (x2)

**ADX** (x2)

**AIN** (x2)
(Not to scale)

**ACF** (x2)

SEC 15

### SEC 15.5

Fit a **Sliding Window Stay (AIN)** into the Mounted Window Stay. To add rigidity to the nub of the Sliding Window Stays, insert **#10 x 1/2" Pan-Head Screws (ADX)** as shown.




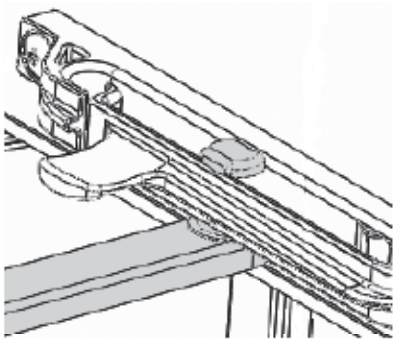

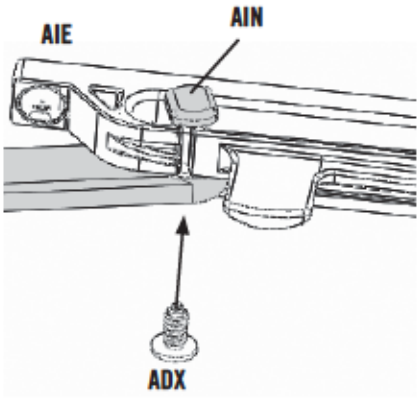


### SEC 15.6

Attach a **Sliding Window Stay (AIN)** to the **Window Stay Bracket (AIV)** using the required hardware.

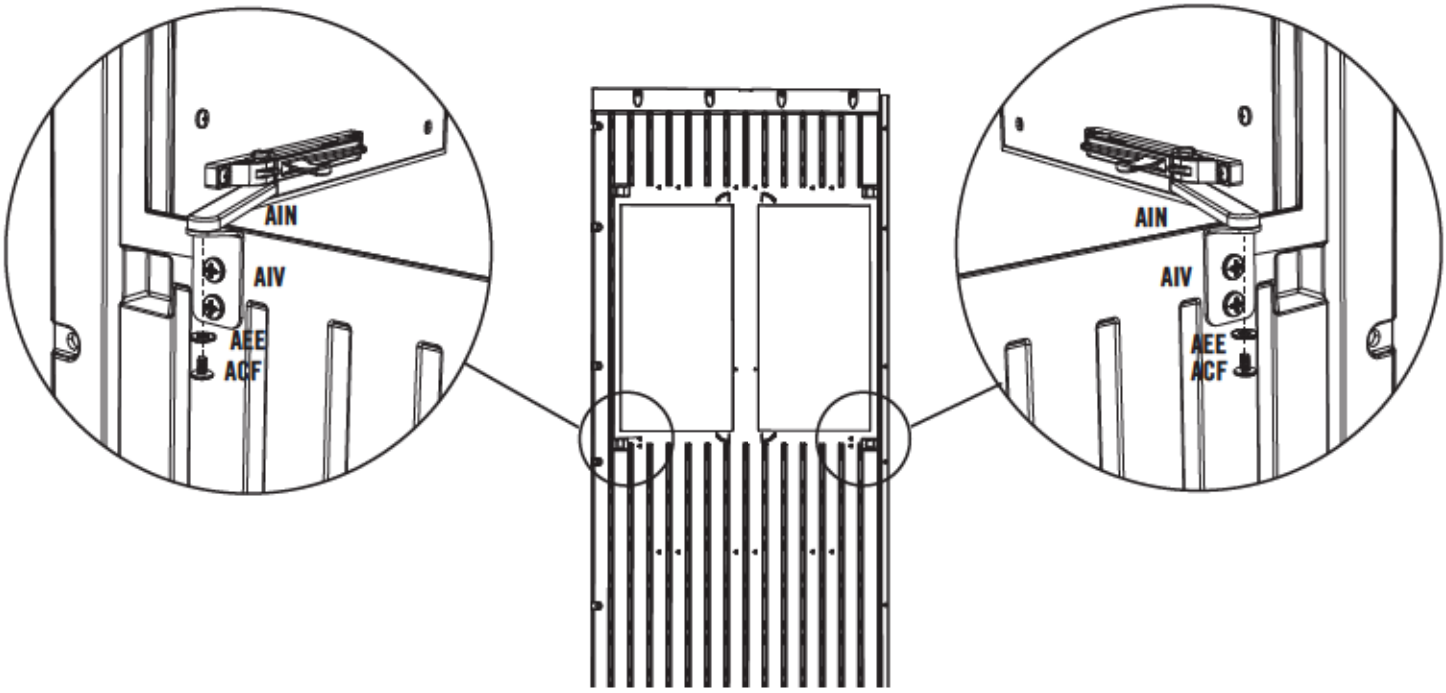

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**AIT** (x4)
(Not to scale)



**AIU** (x4)
(Not to scale)



**ACB** (x4)

## SEC 15.7

Fit a **Window Latch Bearing (AIU)** into a **Window Latch (AIT)**. Attach the Window Latch to the upper latch location with a **#10 x 1 1/4" Pan-Head Screw (ACB)**. **Repeat for other Window Latches.**

! ***Note: Ensure notch in Window Latch Bearing fits over the plastic ridge in the Window Frame.***

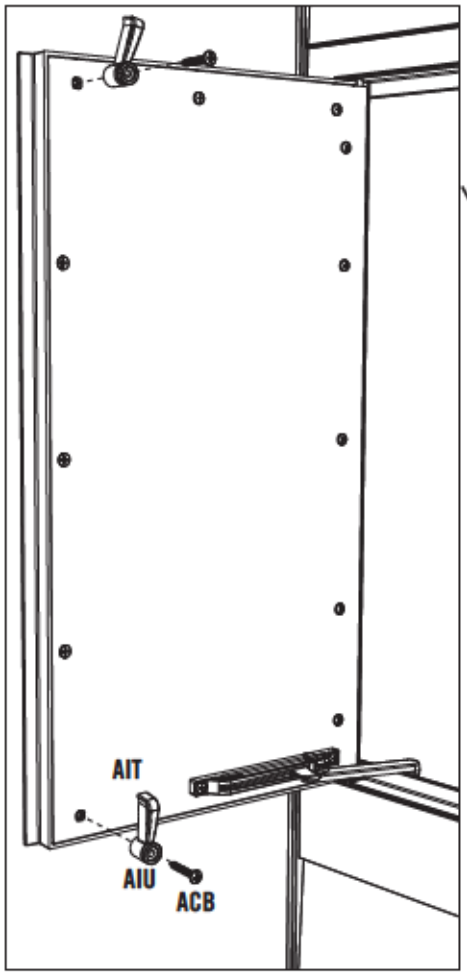


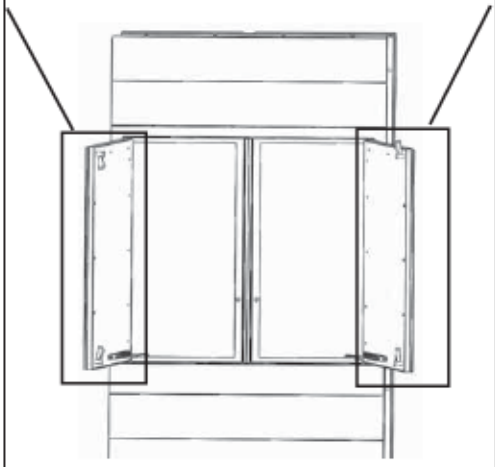

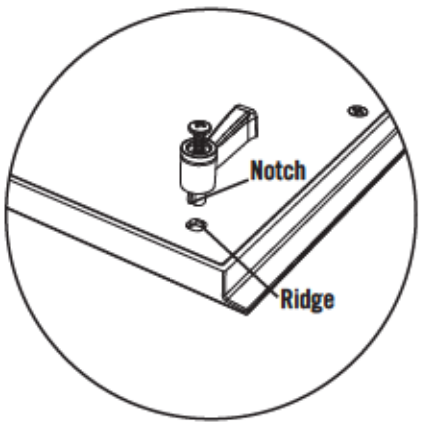


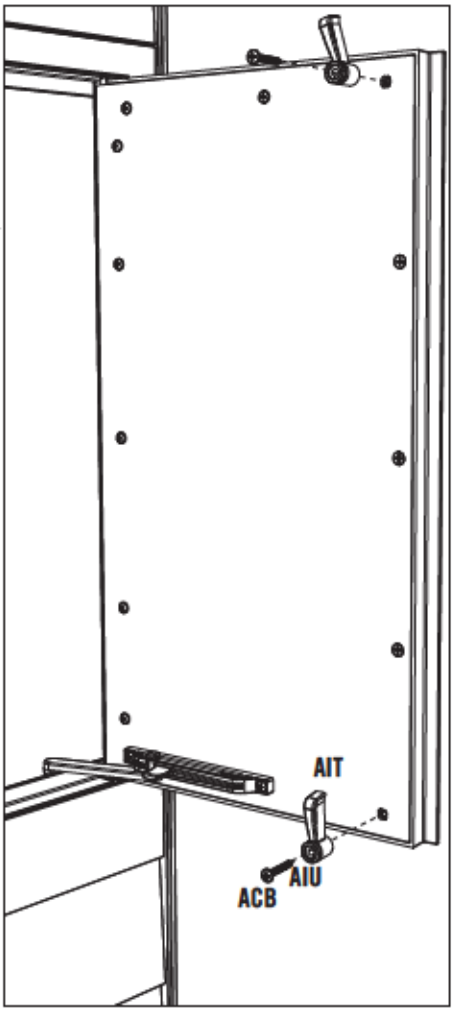

# SEC 16 DOOR WINDOW INSTALLATION

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BNG

Hardware shown at actual size



**ADZ** (x39)
1/4" x 5/8" Pan-Head Screw

## PLASTIC PARTS REQUIRED — LOCATED IN BOX: 5

Parts shown at 4% of actual size



**BLO** (x3)
Door Window

## TOOLS REQUIRED

**Phillips Screwdriver**

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**ADZ** (x39)

SEC 16.1

### DOOR WINDOW INSTALLATION

Connect a **Door Window (BLO)** to each Door using the required hardware.

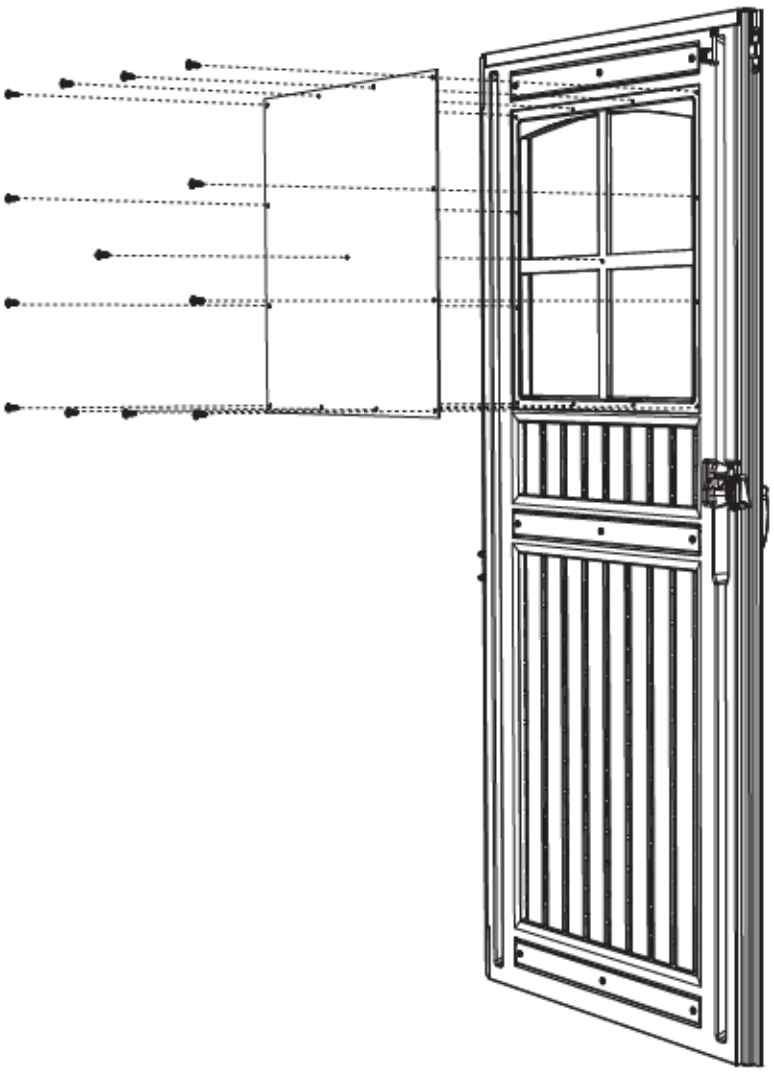

# SEC 17 ACCESSORY INSTALLATION

## HARDWARE REQUIRED — HARDWARE BAGS REQUIRED: BMY, BHC, BHD

Hardware shown at actual size

**ADX** (x8)
#10 x 1/2" Pan-Head Screw

**AEE** (x8)
#10 Flat Washer

Hardware shown at actual size

**ADW** (x10)
#10 x 3/4" Pan-Head Screw

Hardware shown at 50% of actual size

**AIJ** (x2)
Toolholder

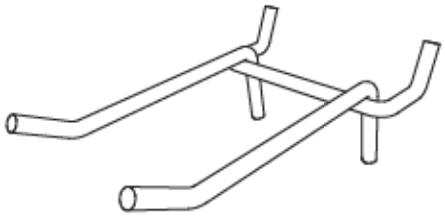

**AIF** (x1)
2" Double-Arm Hook

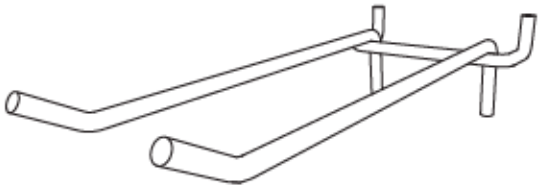

**AIG** (x1)
4" Double-Arm Hook

**AIH** (x3)
J-Hook



**AII** (x3)
L-Hook

## METAL PARTS REQUIRED — LOCATED IN PARTS & HARDWARE BOX: BNO

Hardware shown at actual size

**AIZ** (x4)
Shelf Support for 14" Shelf

## PLASTIC PARTS REQUIRED — LOCATED IN BOX 1 & PARTS & HARDWARE BOX: BNO

Part shown at 4% of actual size

**AFT** (x2)
14" x 30" Shelf

Part shown at 15% of actual size



**AFU** (x1)
Pegboard Strip

## TOOLS REQUIRED

Phillips Screwdriver

7/16" Wrench

Safety Glasses

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**ADX** (x8)

**AEE** (x8)

## SEC 17.1 14" x 30" SHELF INSTALLATION

Insert **Shelf Brackets (AIZ)** into notches in any Wall Support Channel. Place a **14" x 30" Shelf (AFT)** on the Shelf Brackets and secure with **#10 Flat Washers (AEE)** and **#10 x 1/2" Pan-Head Screws (ADX)**. **Repeat this step for the second Shelf.**

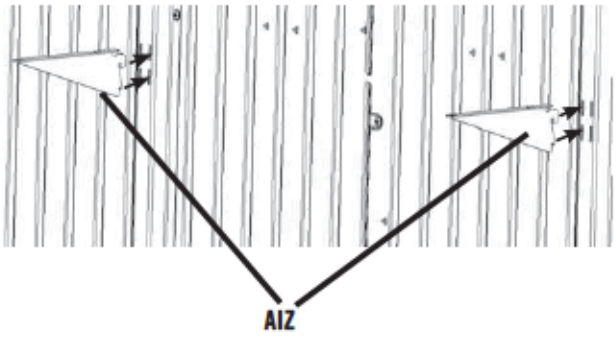


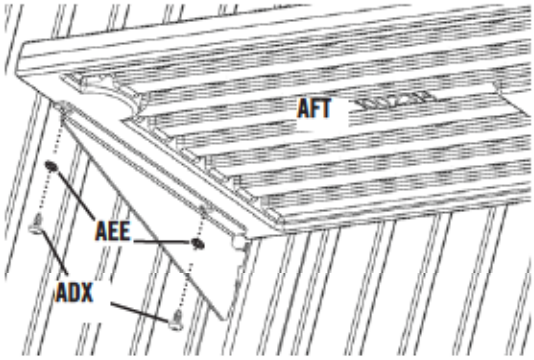


! *Note: There are no pilot holes on the bottom of the shelf; screws are inserted directly into the plastic.*

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**ADW** (x10)
(Not all screws are used)

## SEC 17.3 PEGBOARD STRIP INSTALLATION

Using a Level, position the **Pegboard Strip (AFU)** in the desired location. Screw the Pegboard Strip to the Wall using five (5) **#10 x 3/4" Phillips Pan-Head Screws (ADW)**. See Note.

***Note: The Pegboard Strip is screwed directly into the plastic. Line up the Strip anywhere on Wall so holes are over plastic (and not over a groove in the Wall).***

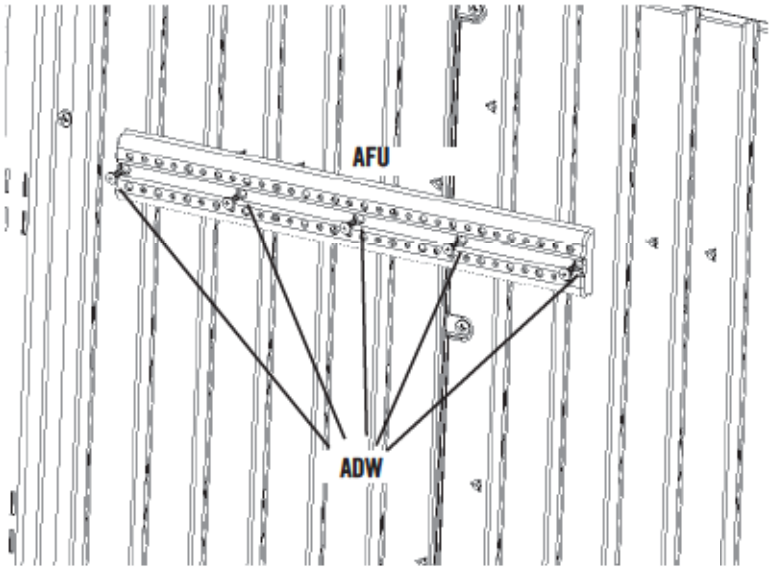




**ADZ** (x4)

***Note: Ensure the Pegboard Strip is level before inserting Screws.***

## SEC 17.4

Insert **Hooks (AIF, AIG, AIH, AII,** and **AIJ).**

# SEC 18 FINAL STEPS

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BNH

Hardware shown at actual size



**ADZ** (x4)
1/4" x 5/8" Pan-Head Screw

**CHECK WITH YOUR LOCAL HARDWARE STORE FOR ANCHORING HARDWARE FOR YOUR PLATFORM**

## TOOLS REQUIRED

**5/16" Wrench** (x2)

**Phillips Screwdriver**

**Hammer Drill**

**3/16" Masonry Bit**

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

## SEC 18.1 CENTER & LEFT DOOR ADJUSTMENT

You may need to adjust the height of the Center Door to eliminate an uneven gap. Loosen the two Nuts on the Hex Bolt on the Carriage Bracket to raise or lower the Center Door. Once the door has been adjusted to the desired height, retighten the Nuts.

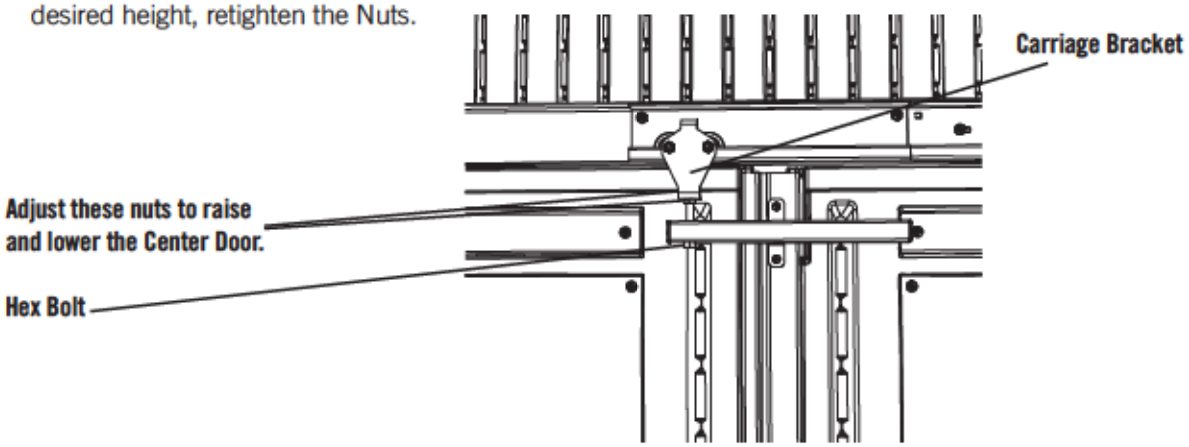


## SEC 18.2 ANCHORING SHED

If you plan on anchoring your shed to your platform, ensure your shed is in the position you would like it to be on your Platform. While another person holds the Shed in place, use a 3/16" masonry bit (for concrete platforms) or a 3/16" drill bit (for wooden platforms) to drill through the hole in each L-Bracket at the bottom of each Wall Support Channel and into the platform beneath (2" deep). The anchoring hardware used depends on your platform. If you have a concrete platform, we recommend using 1/4" x 2" Cement Screws, e.g., Tapcon Anchors. If you have a wood-framed platform, we recommend using 1/4" x 1" Lag Bolts. **Do not exceed a 3/8" diameter bolt.** Use a hammer drill to insert the cement screws or a regular drill to insert the Lag Bolts. **Refer to your local hardware store for this hardware.** You can anchor each Door Frame Support Brackets to the Floor using two (2) **1/4" x 5/8" Pan-Head Screws (ADZ)**, or you can anchor each of them to your platform using two (2) 1/4" Anchor Bolts or 1/4" Lag Bolts. **Do not exceed a 1/4" diameter bolt for the Door Frame Support Brackets. Refer to your local hardware store for this hardware.**

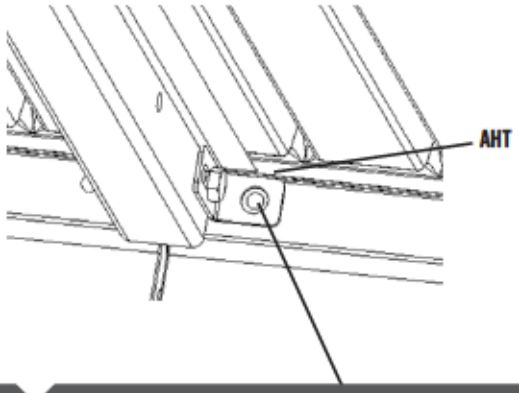


! *Note: Insert anchoring hardware through the Floor Brackets (aht) attached to the bottom of each Wall Support.*

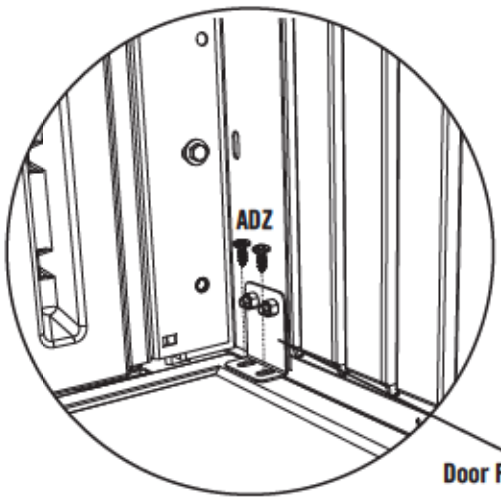

# CLEANING & CARE

Congratulations on your Lifetime® product purchase. By following the instructions below, your new Lifetime product should provide you with years of service and enjoyment.

**Cleaning and Care**

The polyethylene panels are stain- and solvent-resistant. Most stains can be removed, using a mild soap and a soft-bristled brush. Abrasive cleaning materials may scratch the plastic and are not recommended. Repair scratches or rust spots on the metal by sanding the affected area lightly; using a rust preventative spray primer; and finally, spraying with a high-gloss spray enamel paint. Avoid placing a direct heat source on or near surfaces unless using a heat barrier.

## 10-YEAR LIMITED FACTORY WARRANTY

**THE MANUFACTURER RESERVES THE RIGHT TO MAKE SUBSTITUTIONS TO WARRANTY CLAIMS IF PARTS ARE UNAVAILABLE OR OBSOLETE.**

1. Lifetime outdoor sheds are warranted to the original purchaser to be free from defects in material or workmanship for a period of ten years from the date of original retail purchase. The word “defects” is defined as imperfections that impair the use of the product. Defects resulting from misuse, abuse or negligence will void this warranty. This warranty does not cover defects due to improper installation, alteration or accident. This warranty does not cover damage caused by vandalism, rusting, “acts of nature” or any other event beyond the control of the manufacturer.

2. This warranty is nontransferable and is expressly limited to the repair or replacement of defective product. If the product is defective within the terms of this warranty, Lifetime Products, Inc. will repair or replace defective parts at no cost to the purchaser. Shipping charges to and from the factory or distribution center are not covered and are the responsibility of the purchaser. Labor charges and related expenses for removal, installation or replacement of the shed or its components are not covered under this warranty.

3. This warranty does not cover scratching or scuffing of the product that may result from normal usage. In addition, defects resulting from intentional damage, negligence, unreasonable use or hanging from the truss will void this warranty.

4. Liability for incidental or consequential damages is excluded to the extent permitted by law. While every attempt is made to embody the highest degree of safety in all equipment, freedom from injury cannot be guaranteed. The user assumes all risk of injury resulting from the use of this product. All merchandise is sold on this condition, and no representative of the company may waive or change this policy.

5. This product is not intended for institutional or commercial use; Lifetime Products, Inc. does not assume any liability for such use. Institutional or commercial use will void the warranty.

6. This warranty is expressly in lieu of all other warranties, expressed or implied, including warranties of merchantability or fitness for use to extent permitted by Federal and state law. Neither Lifetime Products, Inc., nor any representative assumes any other liability in connection with this product. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

**PLEASE INCLUDE YOUR DATED SALES RECEIPT AND PHOTOGRAPHS OF DAMAGED PARTS.**

REPORT PRODUCT DEFECTS IN WRITING TO:
Lifetime Products, Inc., PO Box 160010 Clearfield, UT 84016-0010
or call 1-800-225-3865 M-F 7 a.m. to 5 p.m. MST.

**REGISTER YOUR PRODUCT FOR QUICKER CUSTOMER SERVICE.**

Visit www.lifetime.com or call 1-800-225-3865 to register your product today.

**FOR INTERNATIONAL WARRANTY CLAIMS:**

All warranty claims must be accompanied by a sales receipt. Report all warranty claims in writing to your regional sales support representative. Please include your dated sales receipt and photographs of damaged parts.
To Identify the representative for your region — Please visit: www.lifetime.com/international

LIFETIME®

www.lifetime.com

*To purchase accessories or other Lifetime Products, visit us at:*

# *www.lifetime.com*

*Or call: 1-800-424-3865*

LIFETIME

OUTDOOR STORAGE

## MODEL N° 6426

# *OWNER'S MANUAL*

**Keep this Identification Number in case you need to contact our Customer Service Department.**

Dear Valued Customer,

We would like to congratulate you on your purchase of a Lifetime© Outdoor Storage Shed! We are confident that you have made the perfect choice and you will be very pleased with your new storage solution.

Lifetime© Outdoor Storage is part of the family of products created and manufactured by Lifetime® Products, Inc. Like all of our products, you can be assured that the quality of your Lifetime Outdoor Storage Shed is the best in the world! And, we back that quality up by offering the best warranty in the business – A 10-year warranty that fully covers the Shed!

All of our Sheds are built with the highest-quality steel and high-density polyethylene (HDPE) parts. The design and construction of our steel-reinforced double-Wall Panels is second to none. All of our exposed steel parts and gables are powder coated and we use high-density polyethylene plastic. What makes polyethylene so special? It has superior strength and durability, and, it won't crack or degrade outdoors.

So now that you know the quality you are getting in a Lifetime Outdoor Storage Shed, please take the time to READ THIS INSTRUCTION MANUAL!

We have taken great care in providing the best possible form of instructions to help you put your new Outdoor Storage Shed together. Before you get started, PLEASE read the following preparation tips to help you get started!

We can assure you, your construction experience will be a lot more enjoyable if you do!

PREPARATION TIPS:

- The first step is simple… RELAX! You have made a great purchase, but Rome was not built in a day. Plan to spend a good part of your weekend putting together your fine Outdoor Storage Shed. Our philosophy is, if it comes together quickly and easily, it surely will come apart quickly and easily! Your Lifetime© Outdoor Storage Shed will surely last a long, long time, if you are patient, and take all the time necessary to put it together as we have instructed.

- Grab a friend to join in on the fun! This is not a one-person endeavor. We have found that not only will things go smoother if you have two or more people participating in the construction of the Shed, but it will go quicker as well. So, the more the merrier!

- Make sure you have all the tools necessary for constructing your new Shed. There is a "Tools Required For This Assembly" list on page five of this Owner's Manual.

- The plastic pieces of your Shed may become damaged by over tightening the screws. To avoid this damage, we strongly recommend the use of a low-powered power screwdriver or a drill that has an adjustable clutch that is set on a low-torque setting. If neither is available, use a hand screwdriver. If a hand screwdriver is all you have, take several breaks… your wrist will need it!

- You will also need two small ladders (when it comes time to do the roof!).

## IMPORTANT! PLEASE READ BEFORE BEGINNING ASSEMBLY

- Before beginning assembly, remove the Parts List from the center of this Owner's Manual and take an inventory of the parts included with your Outdoor Storage Shed. Also, read through the entire instruction manual. It's always a great practice to get a feel for the flow of the process and to familiarize yourself with the parts involved. But, try not to get ahead of yourself and start the process out of order.

- FOLLOW THE INSTRUCTIONS IN ORDER! Everything goes together in a certain order, and we have learned what that correct order should be. In our state-of-the-art research and testing facility, we have painstakingly created these instructions. The order of construction is there for a reason, and some parts simply will not fit if built out of order. Just follow along with the order in the instructions and everything will fit together and things will go very smooth.

- YOUR SHED MUST BE BUILT ON A LEVEL SURFACE! If the spot you have chosen to place your wonderful new Outdoor Storage Shed is not level, the Shed will not assemble correctly! We recommend a concrete patio, a wood platform or creating a pad with pea gravel. Your Shed is meant to last a lifetime, so provide the proper foundation for it before you start to build.

- Before you build it, make sure you are allowed to build it! Consult all building codes, as well as city and county ordinances, to ensure that you do not require a building permit to construct your Outdoor Storage Shed. Proper building permit documentation may be required in your neighborhood, and it would be quite unfortunate to learn this after your Outdoor Storage Shed is already built!

Now that you're ready to begin the construction of your wonderful new Outdoor Storage Shed, step back, take a deep breath, get yourself a large cold beverage and enjoy yourself. We guarantee that after spending the right amount of time in building your Shed, you will be able to enjoy it for years to come.

Thanks for choosing Lifetime©, and have fun!

## ABOUT LIFETIME PRODUCTS, INC.

Lifetime Products, Inc., has applied innovation and cutting-edge technology in plastics and metals to create a family of affordable lifestyle products that feature superior strength and durability. The world's leading manufacturer of folding tables and chairs, Lifetime was founded in 1986 as the maker of portable basketball systems that revolutionized the industry with patented technology. With diverse offerings such as outdoor storage sheds and steel utility trailers, Lifetime continues to develop innovative products that outfit the way you live.

Lifetime makes the things you need for the lifestyle you want. By innovating products in and around the home, Lifetime simplifies your everyday life and enables you to get the most out of your free time.

LIFETIME®

OUTDOOR STORAGE

## REGISTER YOUR LIFETIME PRODUCT TODAY!

**There are benefits to registering your Lifetime product. With our new online product registration form, it's fast and easy! Register with us at www.lifetime.com and enjoy these great benefits:**

- Receive exclusive money-saving offers from BuyLifetime.com, our online store, as well as NEW product notifications and special closeout promotions!
- In the unlikely event of a product recall or safety modification, we will notify you.
- Registering your product guarantees you warranty service. If you do not register your product, your warranty rights will not be diminished. But you will need to provide a sales receipt to verify your product purchase date before warranty service will be provided.

**LIFETIME'S PROMISE TO YOU:**

*Maintaining your privacy is our long-standing policy at Lifetime. And you can rest assured that Lifetime will not sell or provide your personal data to other third parties, or allow them to use your personal data for their own purposes.*

We invite you to read our privacy policy at www.lifetime.com

**REGISTER today!**

****U.S. and Canada customers ONLY****

IF ASSISTANCE IS NEEDED,

## DO NOT CONTACT THE STORE!

**CALL OUR CUSTOMER SERVICE DEPARTMENT at 1 (800) 225-3865**

HOURS: 7:00 a.m. to 5:00 p.m. Monday through Friday (Mountain Standard Time)
**Call, or visit our Web site for Saturday hours**

**For customers outside the U.S. or Canada, please contact the store for assistance.**

## SAFETY INSTRUCTIONS

**FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN SERIOUS INJURY OR PROPERTY DAMAGE AND WILL VOID WARRANTY.**

To ensure safety, do not attempt to assemble this product without following the instructions carefully. Check entire box and inside all packing material for parts and/or additional instruction material. Before beginning assembly, read the instructions and identify parts using the hardware identifier and parts list in this document. Proper and complete assembly, use and supervision are essential to reduce the risk of accident or injury.

- Do not use or store hot objects such as grills, blowtorches, welding equipment, etc. near the product.
- If using a ladder during assembly, use extreme caution.
- Two capable adults are required for assembly. (It is also recommended that a third adult function as an instruction reader.)

*Most injuries are caused by misuse and/or not following instructions. Use caution when using this product.*

## BEFORE BEGINNING ASSEMBLY

Keep the hardware bags and their contents separate. If any parts are missing, call our Customer Service Department.

Read the "Congratulations" letter on page 2-3. Identify and inventory all parts and hardware using the parts and hardware lists and identifiers in this document.

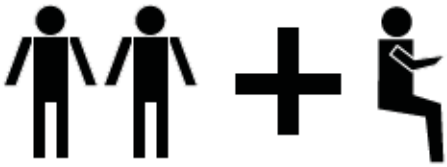

***Two adults required to complete assembly***

***(+ one adult suggested as an instruction reader)***

**Only adults should set up the product. Do not allow children in the set-up area until assembly is complete.**

## IF YOU ARE INSTALLING A NEW SHED

1. Check contents of boxes and compare to parts listed on the Parts List.
2. Follow instructions that came with your shed, but add extra floor panel, wall panels, Roof Cap and Skylight at appropriate points in the assembly.

## IF YOU ARE EXTENDING AN EXISTING SHED

1. Remove any bolts or screws being used to anchor the shed to the ground.
2. Remove any objects from back shelves.
3. Remove any shelves, pegboard or pegboard strips, or other objects hanging on the last two side Wall Panels on either side.
4. Check contents of boxes and compare to parts listed on the Parts List.
5. Follow the steps in this manual.
6. If you are extending an 8' x 5' shed you will need to modify the following instructions by not removing as many parts as shown in the illustrations.

## TOOLS REQUIRED FOR THIS ASSEMBLY

| *Phillips Screwdriver | *Electric Drill | 7/16" Wrench | 3/8" Wrench | Safety Glasses |
|---|---|---|---|---|
|  | | | | |
| (x1) | (x1) | (x2) | (x1) | (1 pair for each person) |

*See "Screwdriver Notice" on page 7.

# ASSEMBLY GUIDES

***Refer to the following areas throughout the instructions to assist in the assembly process:***

**This area is located at the top, left-hand corner of the page and indicates which tools and hardware are needed to complete the assembly steps on a page.**

**This area is located at the top, right-hand corner of the page and shows an image of the product with shaded parts indicating which section is being assembled.**

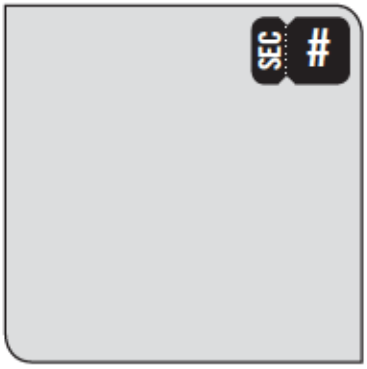


**This area is usually located in the bottom, left-hand corner of a step and indicates that special attention is needed to perform a particular part of a step.**

**These areas are usually located in the bottom, right-hand corner of a step and indicate that damage to the product or serious injury may occur if the caution or warning is not heeded.**

**Throughout the Parts & Hardware List, Part & Hardware Identifiers, and instructions are three-letter IDs. These IDs are below the images of the parts and hardware to help you locate and identify the parts and hardware during assembly. These IDs are not necessarily on the parts themselves.**



**ADZ** (x10)
1/4" x 5/8" Pan-Head Screw

## Level Surface Notice:

Surface must be leveled before installation. We recommend building a level work space with a concrete or patio style surface. If the surface is not properly leveled, the Outdoor Shed will not assemble correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.

## Building Code Notice:

Consult all local building codes, as well as city and county ordinances, to ensure that the construction of the Outdoor Shed does not require a building permit. Proper building permit documentation may be required in your neighborhood, and it would be unfortunate to learn this after constructing the Shed.

## Screwdriver Notice:

You may use a #2 Phillips head screwdriver bit and a power screwdriver or drill, instead of a hand screwdriver. However, be aware that the plastic pieces of your Shed can be damaged by overtightening of screws. To avoid damage we strongly recommend the use of a low-powered power screwdriver or a drill that has an adjustable clutch that is set on a low torque setting. If neither is available, use a hand screwdriver. In any case use caution to avoid overtightening the screws.

## Floor Puncture Notice:

Sharp objects may damage your floor. If resting sharp, heavy objects on your Shed floor, place a block of wood between the sharp object and floor.

## ⚠ CAUTION:

If more than six (6) inches of snow accumulate on the roof of the shed, carefully remove the snow to avoid possible roof collapse. While standing on the ground, remove the snow from the roof with a broom or snow shovel. Do not stand on the roof to remove snow.

***Snow Load Kit available from Customer Service for high snow areas.***

## PARTS & HARDWARE LIST

| ID | Description | Quantity |
|---|---|---|
| ***Main Parts*** | | |
| AFY | Center Roof Cap | 2 |
| AFH | Truss Gutter Channel | 4 |
| AFQ | Wall Support Channel | 4 |
| AFG | Truss Brace Channel | 2 |
| AGQ | Center Roof Panel | 4 |
| AHD | Wall Panel | 2 |
| AHH | Window Wall Panel | 2 |
| AHG | Window Frame | 4 |
| AGJ | Center Floor Panel | 4 |
| AFL | Roof Support Strip | 12 |
| AHF | Window | 4 |
| AFP | Truss Support Strip | 4 |
| ***BJO 6426 Hardware Bag*** | | |
| ***BGV Truss Assembly Hardware x2*** | | |
| AAK | 1/4" x 1 1/2" Hex Bolt | 10 |
| ADJ | 1/4" Cap Nut | 10 |
| AIP | Truss Gutter Connector | 1 |
| AHT | Floor Bracket | 2 |

| ID | Description | Quantity |
|---|---|---|
| ***BGT Wall & Roof Installation Hardware x2*** | | |
| ADZ | 1/4" x 5/8" Phillips Pan-Head Screw | 60 |
| AJA | Foam Cube | 4 |
| ACJ | #10 x 5/8" Phillips Pan-Head Screw | 4 |
| AED | #10 x 1" Fender Washer | 4 |
| ***BGU Window Assembly x2*** | | |
| ADZ | 1/4" x 5/8" Phillips Pan-Head Screw | 4 |
| ADW | #10 x 3/4" Phillips Pan-Head Screw | 4 |
| AEE | #10 x 1/2" Flat Washer | 2 |
| ACF | #10 x 5/16" Phillips Pan-Head Screw | 2 |
| AIE | Mounted Window Stay | 2 |
| AIN | Sliding Window Stay | 2 |
| AIU | Window Latch Bearing | 4 |
| AIT | Window Latch | 4 |
| ADX | #10 x 1/2" Phillips Pan-Head Screw | 22 |
| AIV | Window Stay Bracket | 2 |
| AIR | Window Hinge | 4 |
| ACB | #10 x 1 1/4" Phillips Pan-Head Screw | 4 |
| ADK | #10 Cap Nut | 2 |
| ACD | #10 x 3/8" Flat-Head Screw | 2 |

## HARDWARE IDENTIFIER

**TRUSS ASSEMBLY HARDWARE [BGV] x2**

Hardware shown at actual size (*unless indicated otherwise)



**AAK** (x10)
1/4" x 1 1/2" Hex Bolt

**ADJ** (x10)
1/4" Cap Nut

**AHT** (x2)*
Floor Bracket



**AIP** (x1)*
Truss Gutter Connector

**WALL & ROOF INSTALLATION HARDWARE [BGT] x2**

Hardware shown at actual size (*unless indicated otherwise)

**AJA** (x4)*
Foam Cube



**ADZ** (x60)
1/4" x 5/8" Phillips Pan-Head Screw

**ACJ** (x4)
#10 x 5/8" Phillips Pan-Head Screw



**AED** (x4)
#10 x 1" Fender Washer

# HARDWARE IDENTIFIER

**WINDOW ASSEMBLY HARDWARE [BGU] x2**

Hardware shown at actual size



**ADZ** (x4)
1/4" x 5/8" Phillips Pan-Head Screw

**ADW** (x4)
#10 x 3/4" Phillips Pan-Head Screw

**ADX** (x22)
#10 x 1/2" Phillips Pan-Head Screw

**ADK** (x2)
#10 Cap Nut

**AEE** (x2)
#10 x 1/2" Flat Washer

**ACF** (x2)
#10 x 5/16" Phillips Pan-Head Screw

**ACB** (x4)
#10 x 1 1/4" Phillips Pan-Head Screw

**ACD** (x2)
#10 x 3/8" Flat-Head Screw

Hardware shown at 25% of actual size

**AIE** (x2)
Mounted Window Stay

**AIN** (x2)
Sliding Window Stay

**AIV** (x2)
Window Stay Bracket

**AIR** (x4)
Window Hinge

Hardware shown at 50% of actual size

**AIU** (x4)
Window Latch Bearing



**AIT** (x4)
Window Latch

# PARTS IDENTIFIER

Parts shown at 4% of actual size

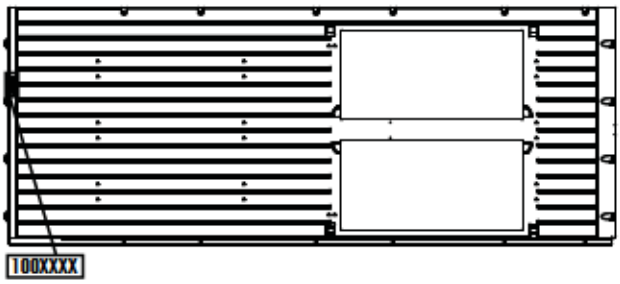


**AHH** (x2)
Window Wall Panel

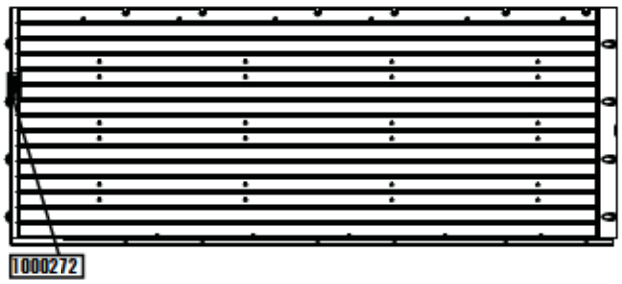


**AHD** (x2)
Wall Panel

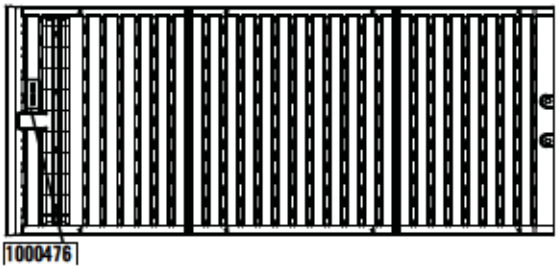


**AGQ** (x4)
Center Roof Panel




**AGJ** (x4)
Center Floor Panel

# PARTS IDENTIFIER

Parts shown at 8% of actual size

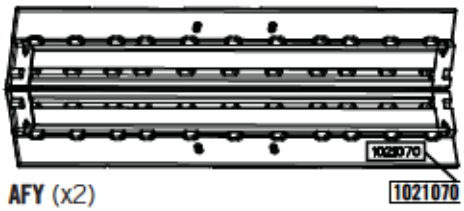


**AFY** (x2)
Center Roof Cap




**AFP** (x4)
Truss Support Strip




**AFL** (x12)
Roof Support Strip




**AFH** (x4)
Truss Gutter Channel



**AFG** (x2)
Truss Brace Channel



**AFQ** (x4)
Wall Support Channel

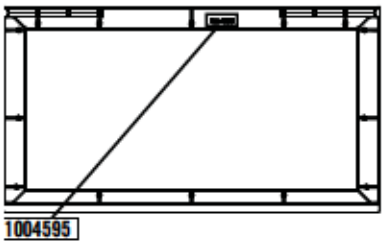


**AHG** (x4)
Window Frame

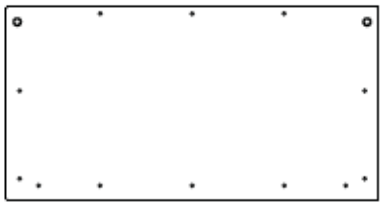

**AHF** (x4)
Window

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**USE THE SAME TOOLS AND REQUIRED MATERIALS INDICATED IN YOUR SHED'S OWNER'S MANUAL**

SEC 1

SEC 1.1

## SITE SELECTION

This extension kit adds an additional 60" to the length of your shed. Before beginning expansion of your shed, ensure your site can accommodate the new size. Add 60" to the length of your site's wooden platform (shown) or cement platform; the width will remain the same. This may require the use of additional lumber or other materials.

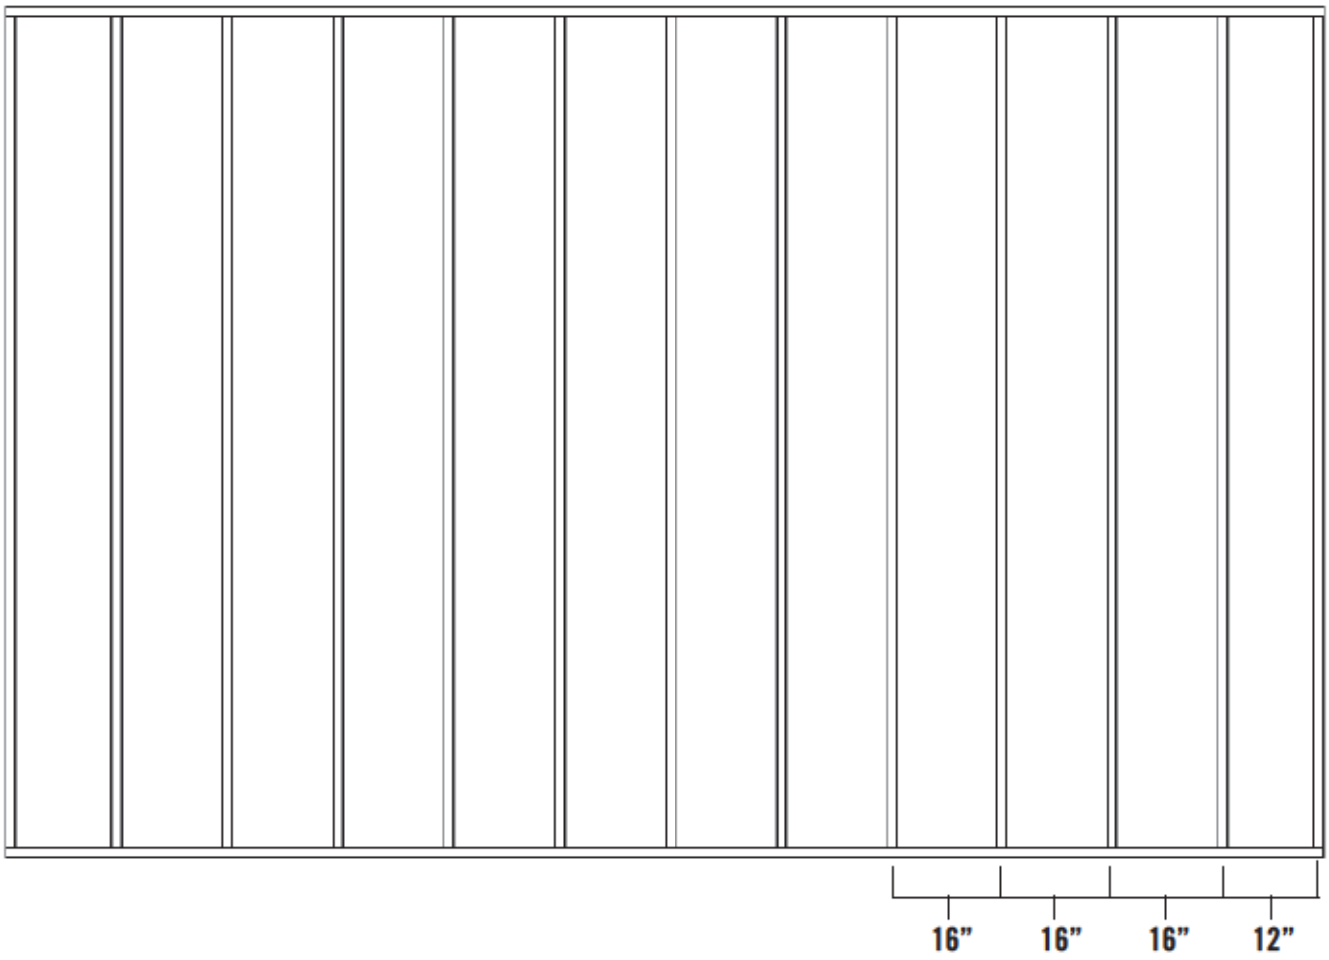


! *Note: Floor studs are all 16" on center with one at 12" on center at the end. Refer to Site Selection & Platform Instructions in Owner's Manual.*

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE





**NO HARDWARE REQUIRED FOR THIS PAGE**

****SAVE ALL HARDWARE FOR RE-ASSEMBLY!****

**If your existing shed is anchored to the ground, remove all anchoring hardware before following these steps.**

SEC 2.1

### SHED DISASSEMBLY

Remove the four Center Roof Panels and two Center Roof Caps highlighted below.

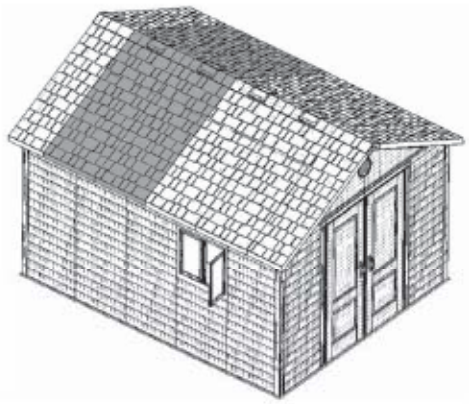

! *Note: Your shed may be shorter than one shown above. Skip the very back Roof Panels (slightly more narrow than the middle Roof Panels) and then remove the next two Roof Panels from each side of the shed (along with the connected Roof Caps).*

SEC 2.2

Remove all Screws from the highlighted Wall Panel that connect it to adjoining Wall Panels and to the Wall Support.

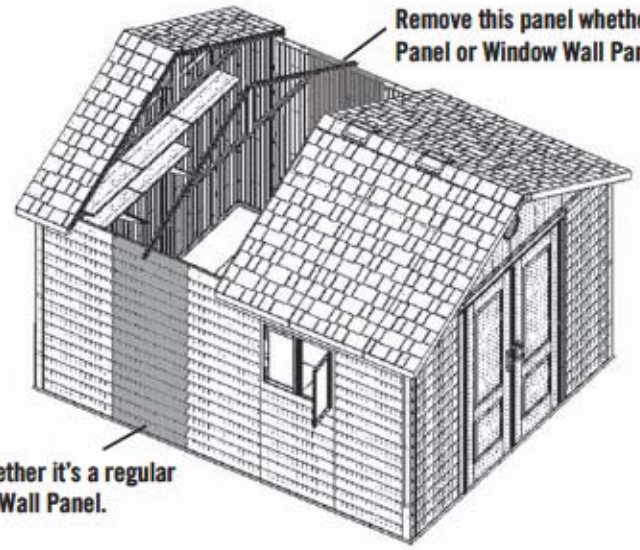

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**NO HARDWARE REQUIRED FOR THIS PAGE**

SEC 2

**SEC 2.3**

Tip the Wall Panel inward.

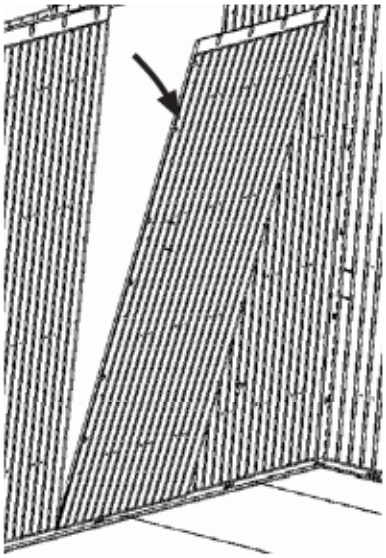

***Note: You're Shed may be a different length than the Shed shown, but the ideas are the same.***

**SEC 2.4**

Use a long flat screwdriver to gently pry the bottom corner of the Wall Panel so that it has room to slide on the inside of other Wall Panels. Slide the Wall Panel to the left, and then remove the Panel. **Repeat Steps 2.2 - 2.4 for the other side of the shed.**

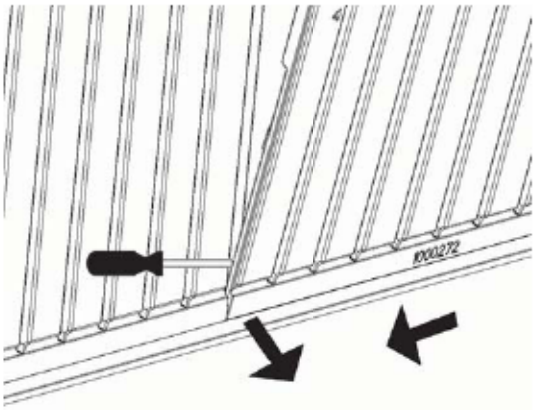

***Note: To remove a Wall Panel, slide it to the left (when looking at it from inside the shed) until it lifts out.***

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE





**NO HARDWARE REQUIRED FOR THIS PAGE**

**SEC 2.5**

Remove the Truss Assembly and set it aside for later.

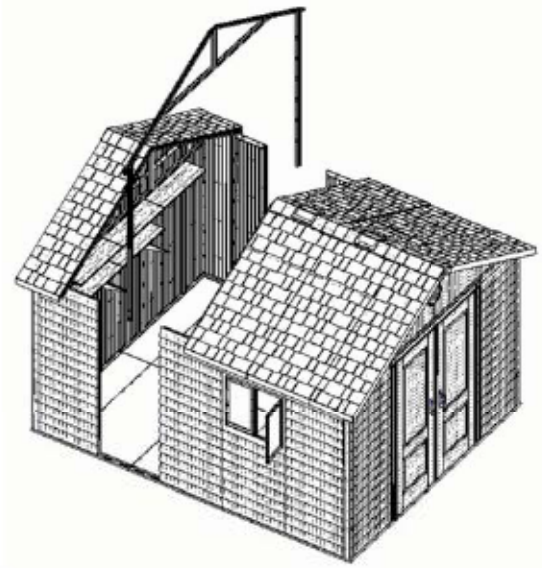

**CAUTION**

As you remove the Wall Panels, have one person support the Truss assembly so that it does not fall over.

**SEC 2.6**

With at least one person on each side of the shed, tip the back section of the shed forward to about a 45° angle and slide the back section away from the shed.

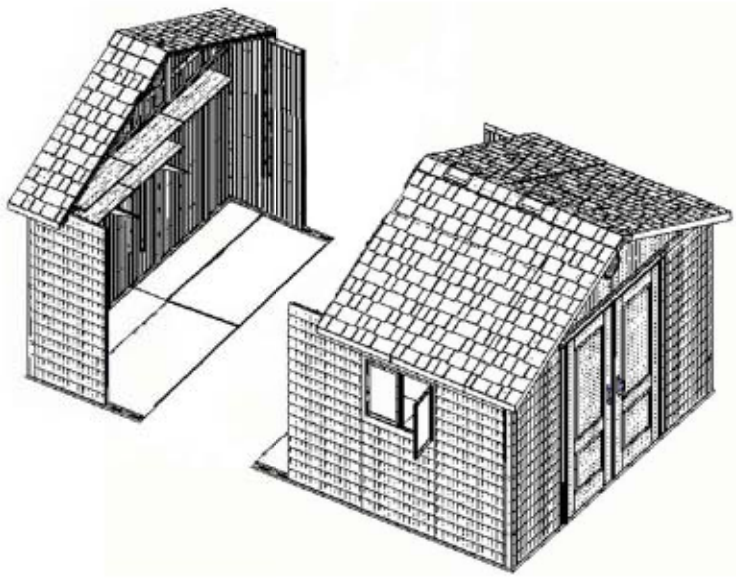

# SEC 3 FLOOR ASSEMBLY

## PLASTIC PARTS REQUIRED

Part shown at 4% of actual size

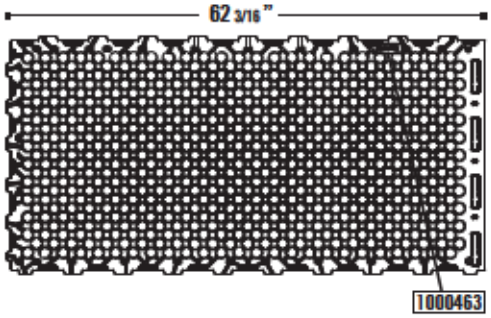


**AGJ** (x4)
Center Floor Panel

## TOOLS REQUIRED

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 3

**NO HARDWARE REQUIRED FOR THIS PAGE**

SEC 3.1

### FLOOR ASSEMBLY

Fit together the four **Center Floor Panel (AGJ)** extensions.

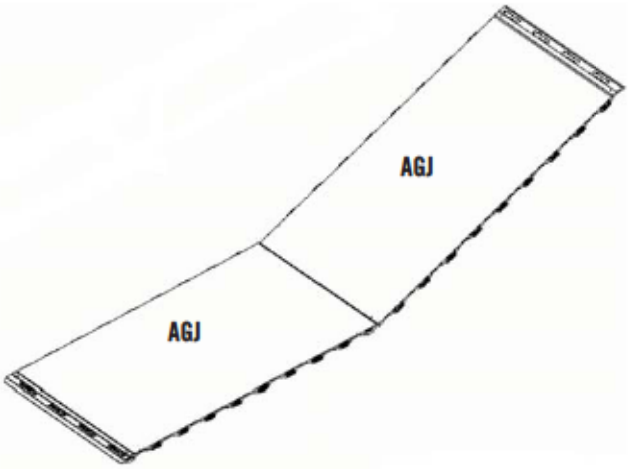


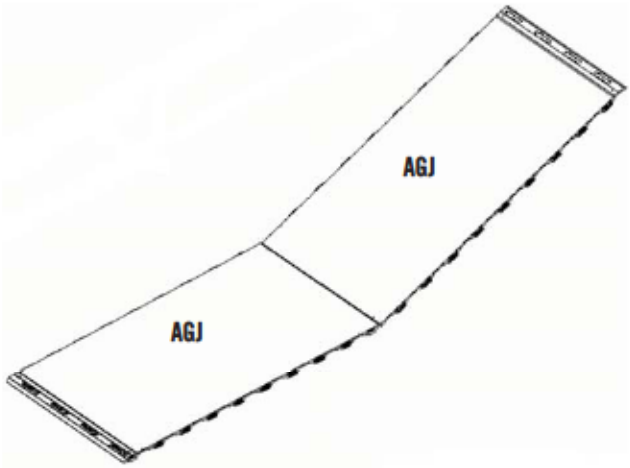


SEC 3.2

Tip the Center Floor Panel Assemblies forward at a 45° angle and connect them to the Center Floor Panels on the main section of the shed.

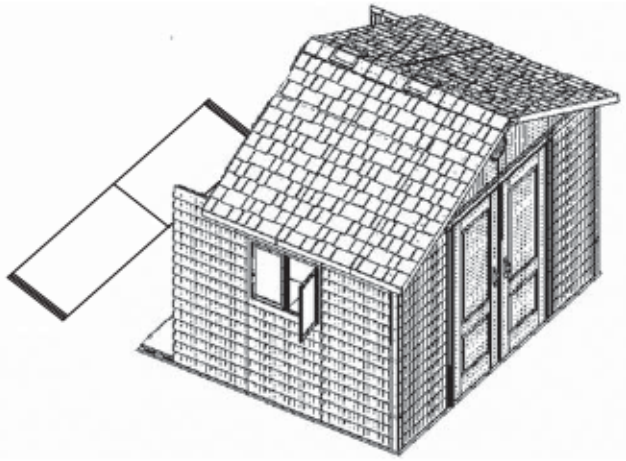

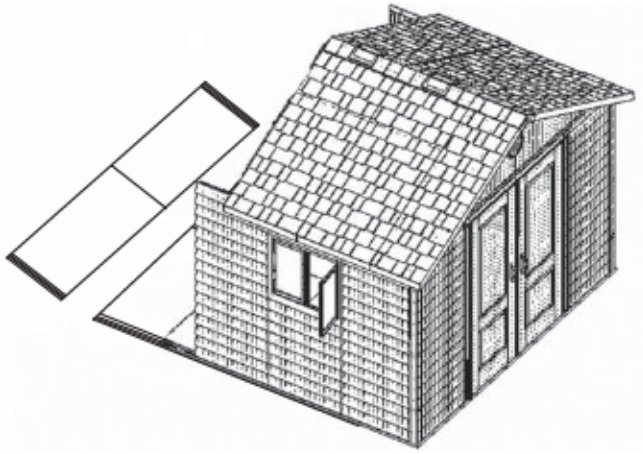

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 3

**NO HARDWARE REQUIRED FOR THIS PAGE**

**SEC 3.3**

With at least one person on each side of the shed, tip the back section of the shed forward at about a 45° angle and slide it forward to re-connect it to the rest of the shed.

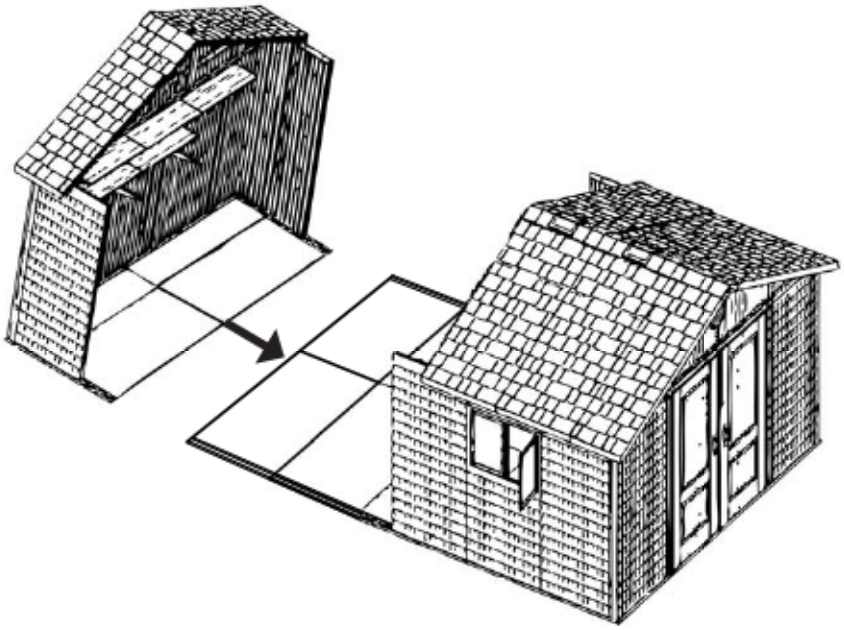

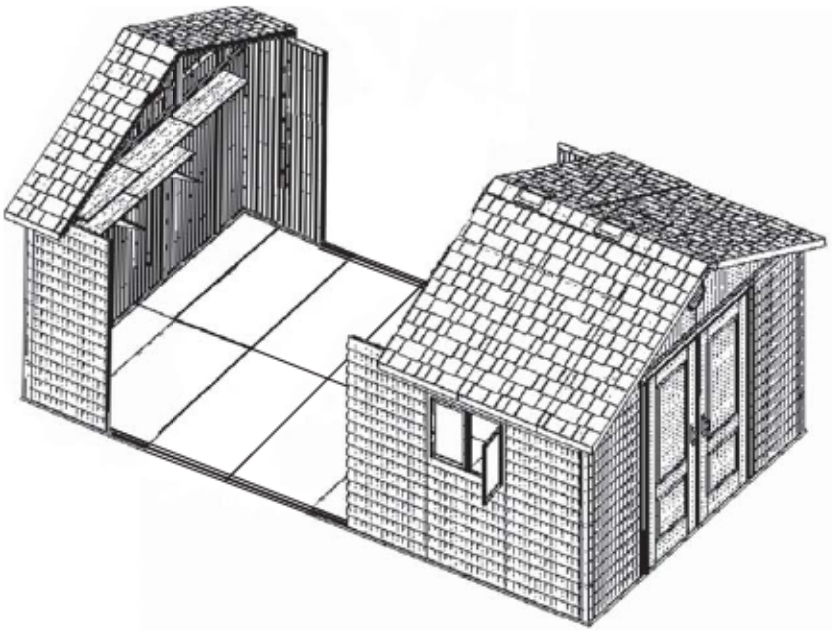

# SEC 4 TRUSS ASSEMBLY

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BGV (x2)

Hardware shown at actual size



**AAK** (x20)
1/4" x 1 1/2" Hex Bolt

**ADJ** (x20)
1/4" Cap Nut

Hardware shown at 50% of actual size



**AIP** (x2)
Truss Gutter Connector

**AHT** (x4)
Floor Bracket

## METAL PARTS REQUIRED

Parts shown at 8% of actual size






**AFH** (x4)
Truss Gutter Channel



**AFG** (x2)
Truss Brace Channel






**AFQ** (x4)
Wall/Shelf Support Channel




**AFP** (x4)
Truss Support Strip

## TOOLS REQUIRED

**7/16" Wrench** (x2)

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 4





## SEC 4.1 TRUSS ASSEMBLY

Fit two **Truss Support Strips (AFP)** together. Bolt Truss Support Strips, **Truss Gutter Connector (AIP)**, and two **Truss Gutter Channels (AFH)** as shown using the required hardware.

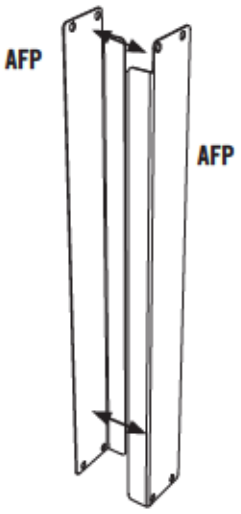


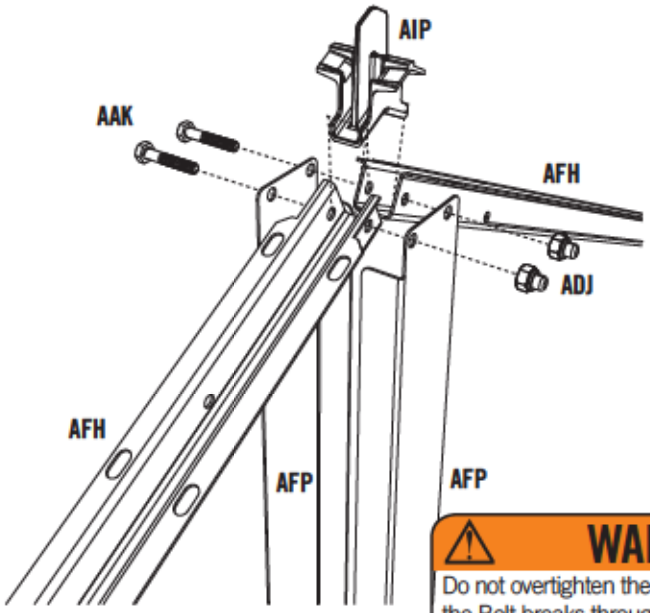


**Note: Only finger tighten hardware.**

**WARNING**

Do not overtighten the Cap Nut. If the end of the Bolt breaks through the plastic cap, call our Customer Service Department. Exposed threads on the end of the Bolt may cause serious injuries.

## SEC 4.2

Attach **Truss Support Strips (AFP)** to the center of a **Truss Brace Channel (AFG)** (Truss Support Strips fit inside the Truss Brace Channel). Attach each end of the Truss Brace Channel to the **Truss Gutter Channels (AFH)** using the required hardware. Tighten all hardware.

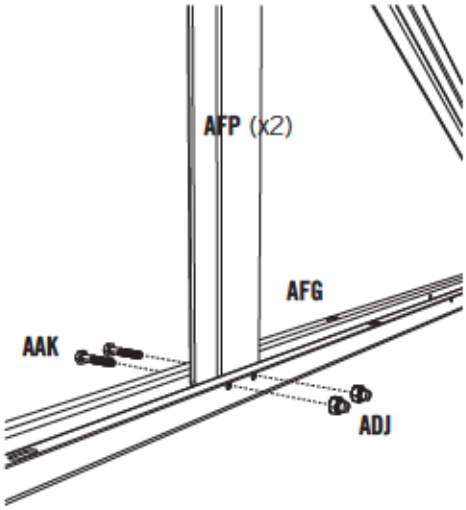


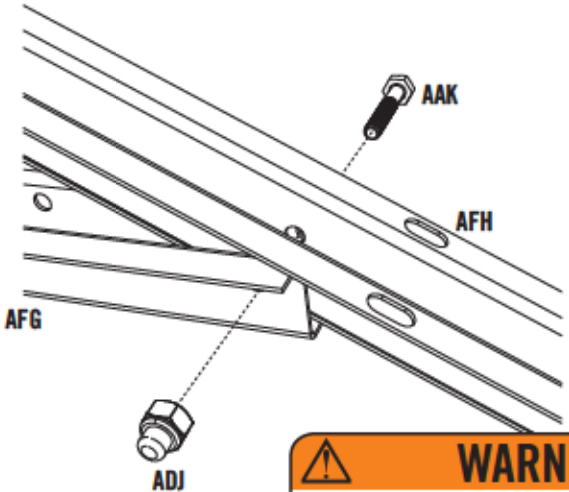


**WARNING**

Do not overtighten the Cap Nut.

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 4

**7/16"** (x2)



**AAK** (x4)

**ADJ** (x4)

**SEC 4.3**

Attach Truss Assembly to two **Wall Support Channels (AFQ)** using **1/4" x 1 1/2" Hex Bolts (AAK)** and **1/4" Cap Nuts (ADJ)**. Do not completely tighten the Cap Nut until after Truss is secured to the Wall.

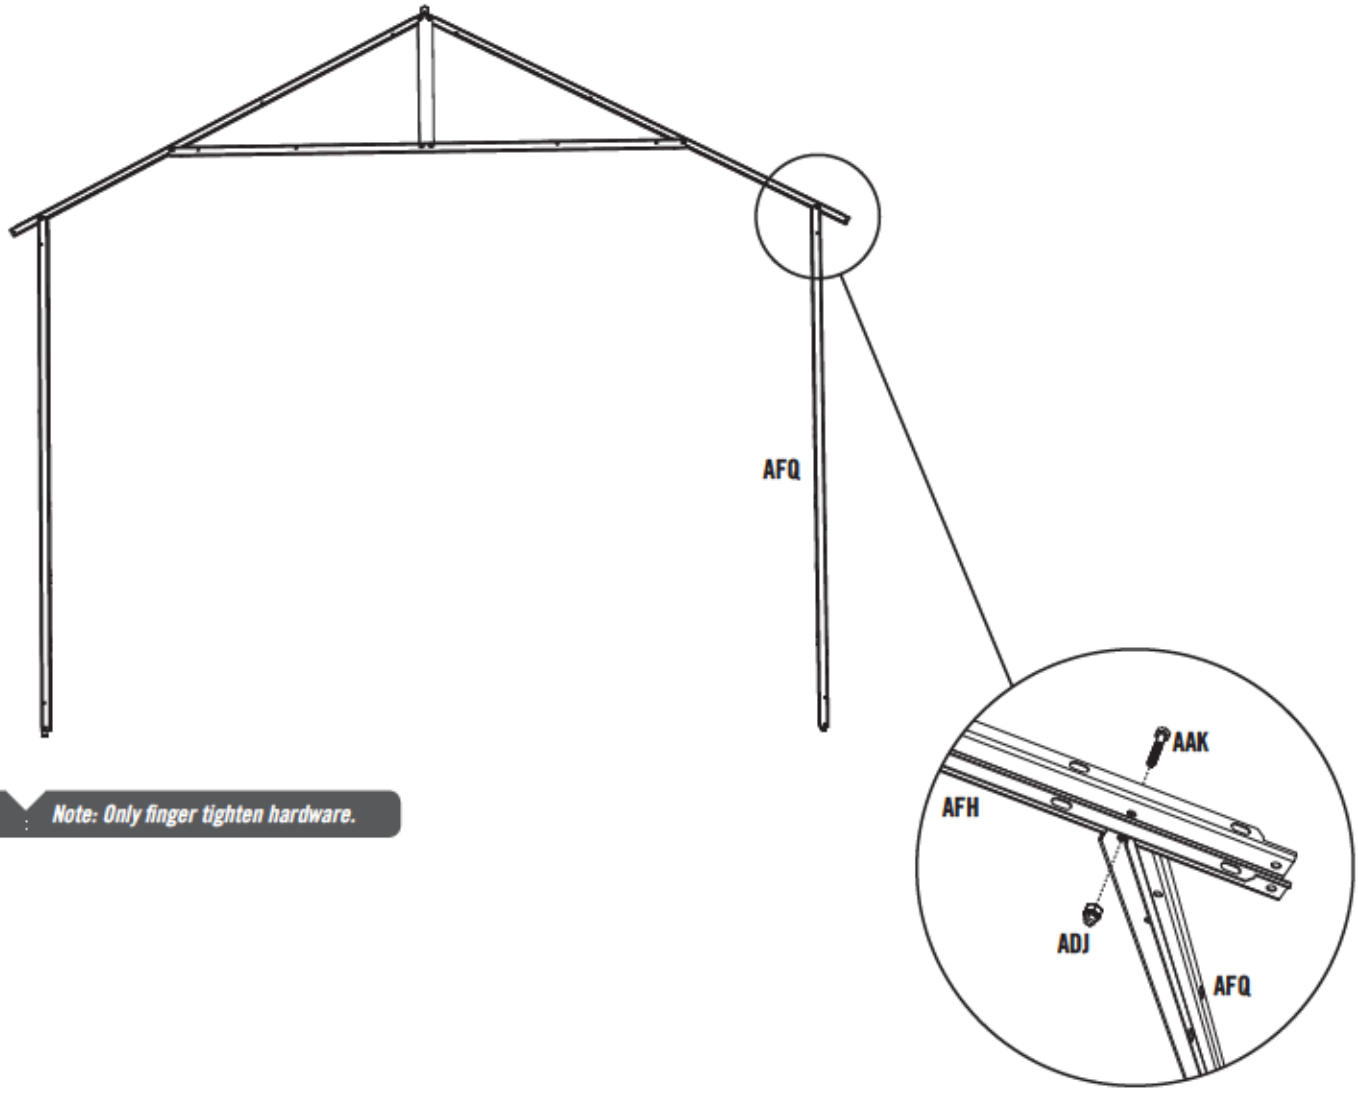


**!** *Note: Only finger tighten hardware.*

**⚠ WARNING**

Do not overtighten the Cap Nut.

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

**7/16"** (x2)



**AAK** (x4)

**ADJ** (x4)

**AHT** (x4)
(Not to scale)

SEC

SEC 4.4

Attach one **Floor Bracket (AHT)** to the bottom of each Wall/Shelf Support Channel using the required hardware. Tighten all hardware. **Repeat this section for all Trusses. You need only do this step if you plan to anchor your Shed. See the "Anchoring the Shed" step at the end of this Owner's Manual.**

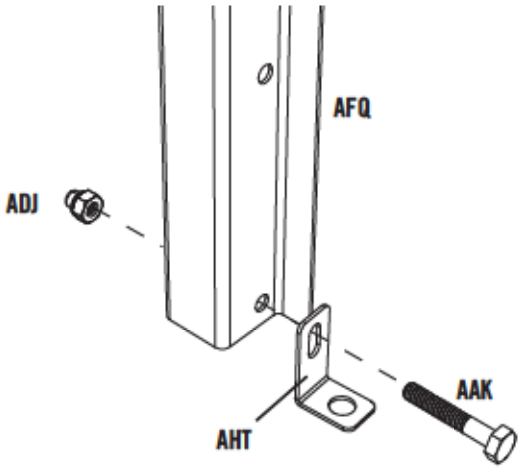

# SEC 5 WINDOW ASSEMBLY & INSTALLATION

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BGU (x2)

Hardware shown at actual size

**ADZ** (x8)
1/4" x 5/8" Pan-Head Screw

**ADW** (x8)
#10 x 3/4" Pan-Head Screw

**ADX** (x44)
#10 x 1/2" Pan-Head Screw

**AEE** (x4)
#10 x 1/2" Flat Washer

**ACF** (x4)
#10 x 5/16" Pan-Head Screw

**ACB** (x8)
#10 x 1 1/4" Pan-Head Screw

**ACD** (x4)
#10 x 3/8" Flat-Head Screw

**ADK** (x4)
#10 Cap Nut

Hardware shown at 25% of actual size

**AIE** (x4)
Mounted Window Stay

**AIN** (x4)
Sliding Window Stay

**AIV** (x4)
Window Stay Bracket

**AIR** (x8)
Window Hinge Tube

Hardware shown at 50% of actual size



**AIU** (x8)
Window Latch Bearing



**AIT** (x8)
Window Latch

## PLASTIC PARTS REQUIRED

Parts shown at 8% of actual size

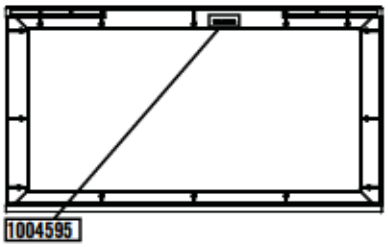


**AHG** (x4)
Window Frame

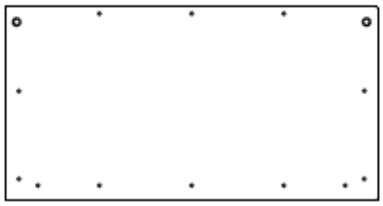

**AHF** (x4)
Window

## TOOLS REQUIRED



**Phillips Screwdriver**

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 5

**AIR** (x4)
(Not to scale)

**SEC 5.1**

Slide **Window Hinge Tubes (AIR)** into the upper and lower hinge holes and fit a **Window Frame (AHG)** over the Hinge Tubes.

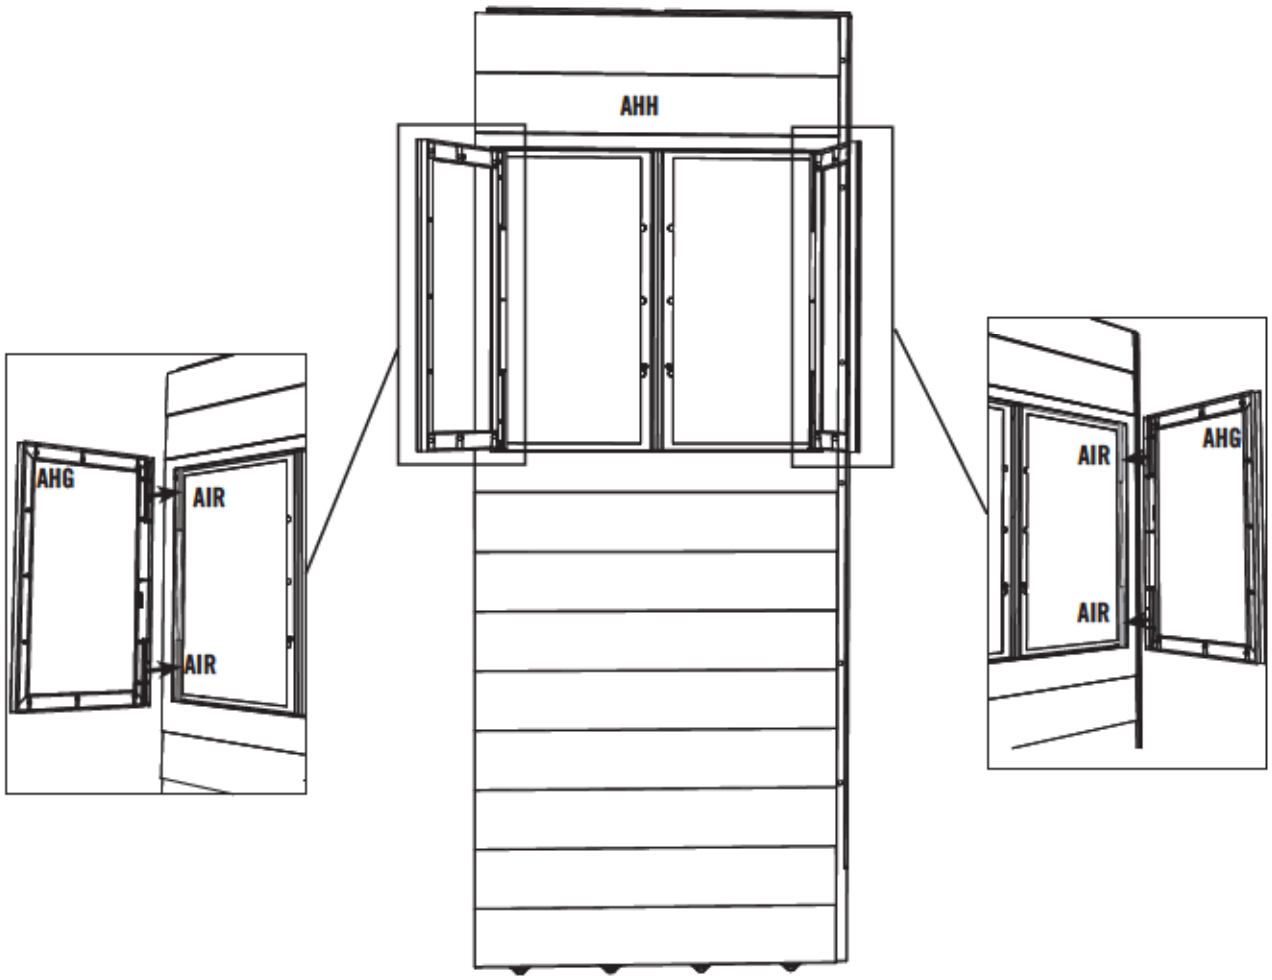

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 5

**ADX** (x20)

**SEC 5.3**

Place a **Window (AHF)** onto the Window Frame. Fasten the Window to the Frame with **#10 x 1/2" Pan Head Screws (ADX)** in the locations shown.

! *Note: Remove plastic film from both sides of window before installing.*

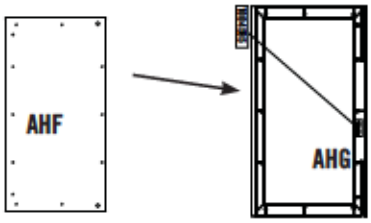


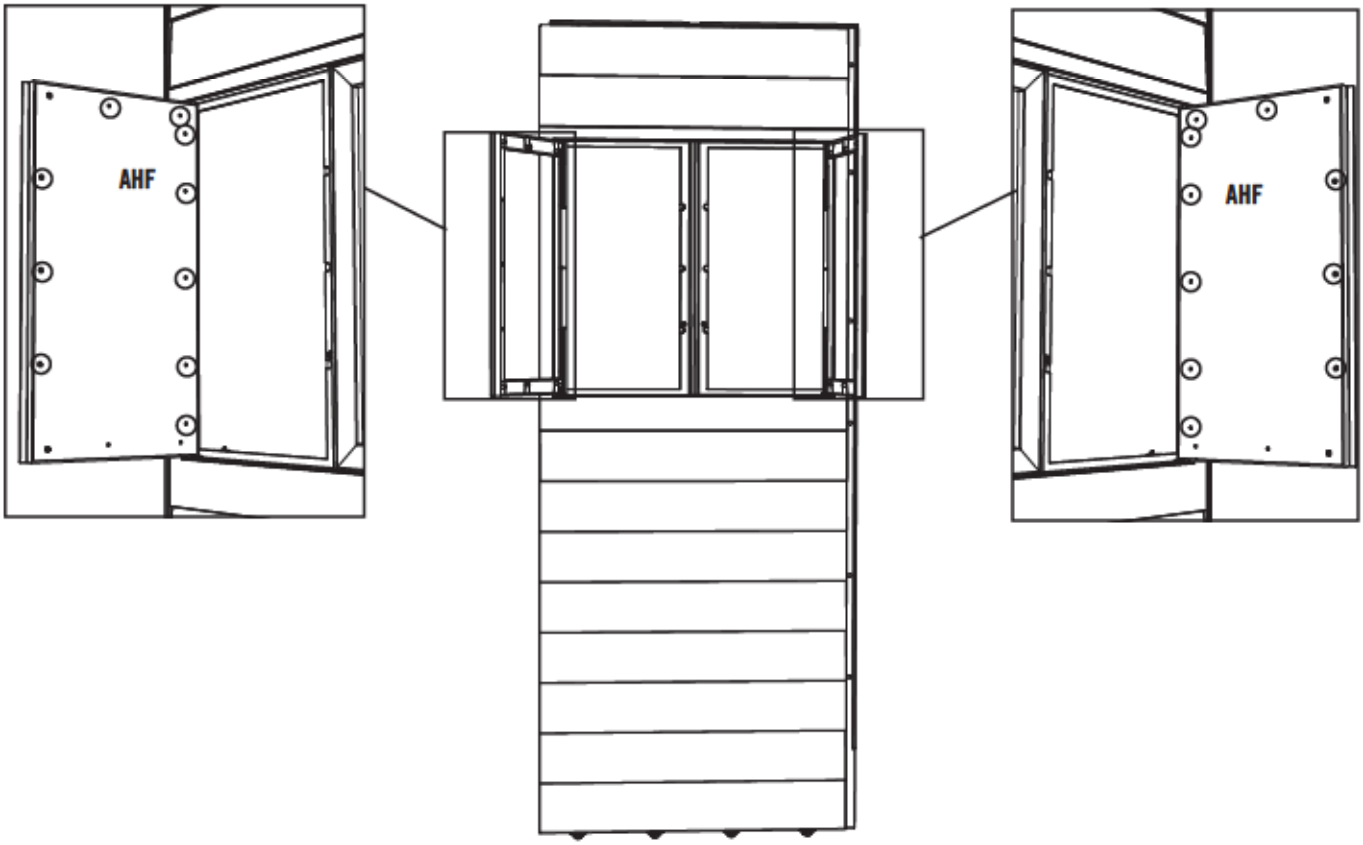


! *Note: Insert Screws into the holes with circles.*

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 5



**AIE** (x2)
(Not to scale)



**AIV** (x2)
(Not to scale)

**ADW** (x4)

**ADZ** (x4)

## SEC 5.4

Attach **Window Stay Brackets (AIV)** to the inside of the **Window Wall Panel (AHH)**.

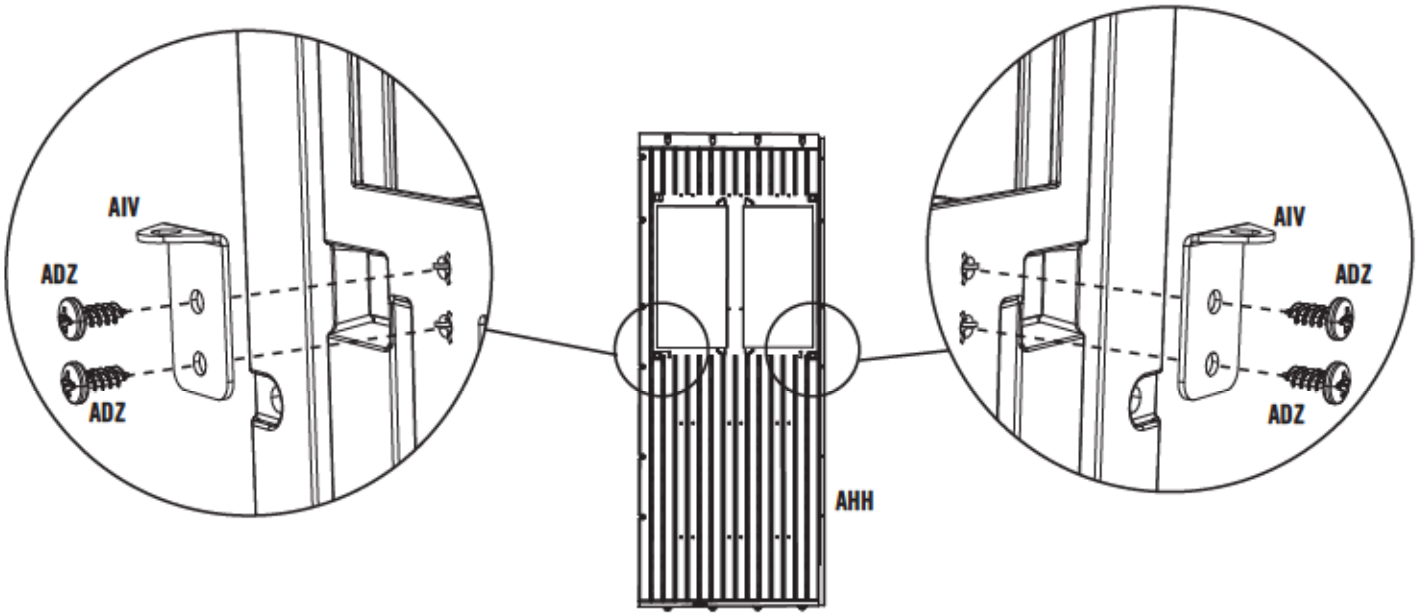


## SEC 5.5

Attach a **Mounted Window Stay (AIE)** to the bottom of the Window Frame.

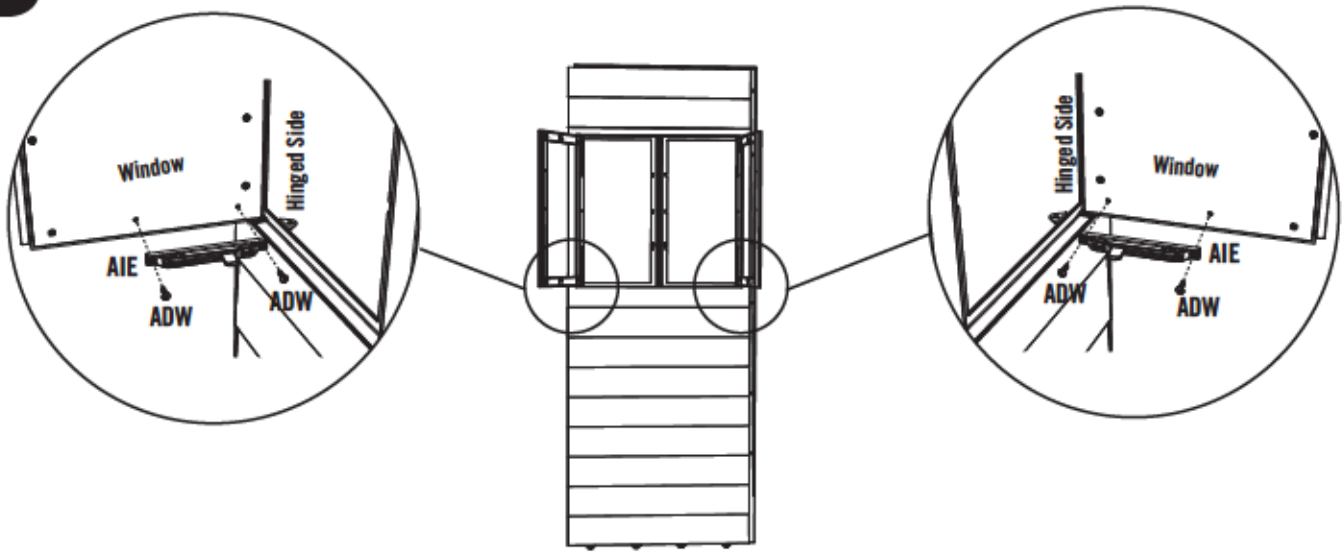

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 5



**AEE** (x2)

**ADX** (x2)

**AIN** (x2)
(Not to scale)

**ACF** (x2)

### SEC 5.6

Fit a **Sliding Window Stay (AIN)** into the Mounted Window Stay. To add rigidity to the nub of the Sliding Window Stays, insert **#10 x 1/2" Pan-Head Screws (ADX)** as shown.




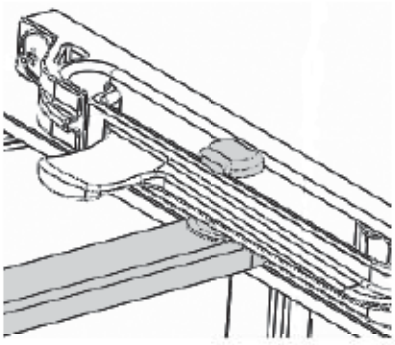

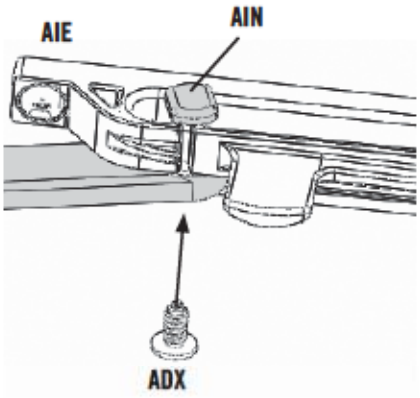


### SEC 5.7

Attach a **Sliding Window Stay (AIN)** to the **Window Stay Bracket (AIV)** using the required hardware.

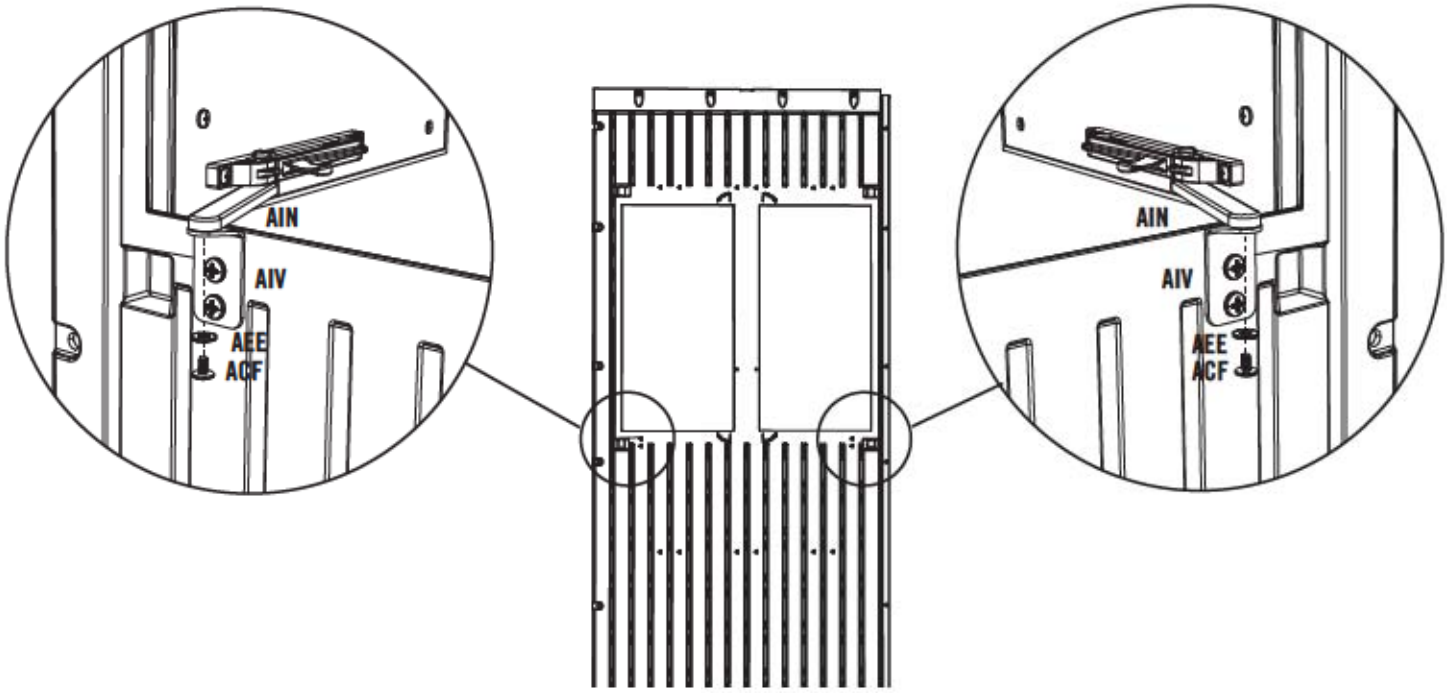

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE







**AIT** (x4)
(Not to scale)



**AIU** (x4)
(Not to scale)



**ACB** (x4)

**SEC 5.8**

Fit a **Window Latch Bearing (AIU)** into a **Window Latch (AIT)**. Attach the Window Latch to the upper latch location with a **#10 x 1 1/4" Pan-Head Screw (ACB)**. **Repeat for other Window Latches.**

! ***Note: Ensure notch in Window Latch Bearing fits over the plastic ridge in the Window Frame.***

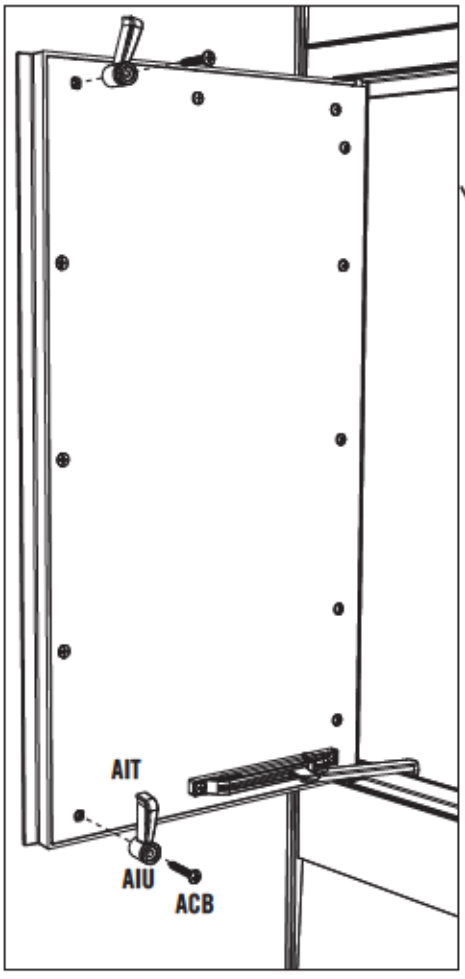


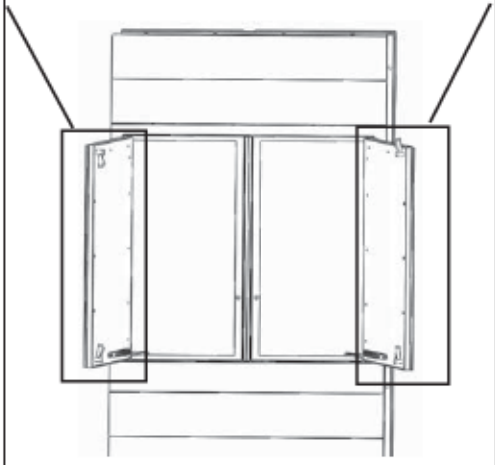

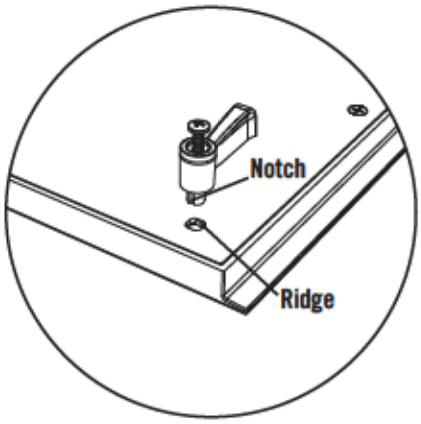


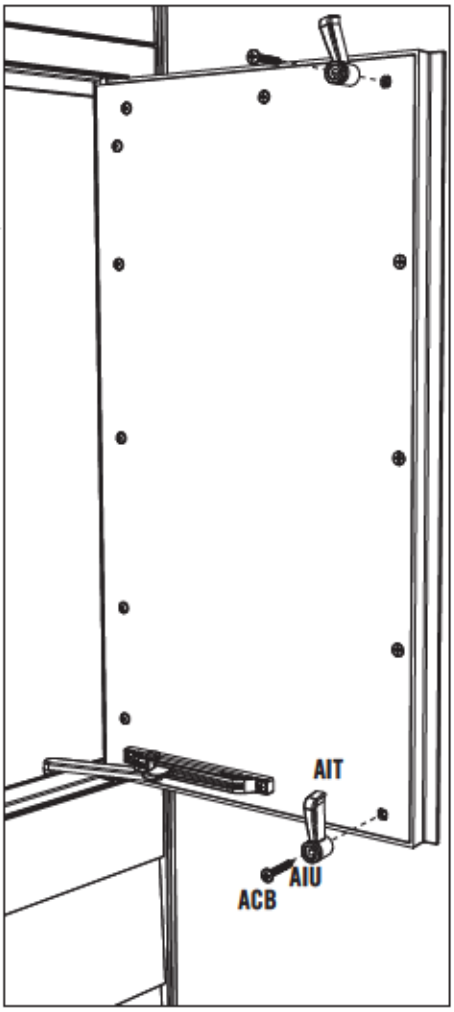

# SEC 6 WALL & ROOF INSTALLATION

## HARDWARE REQUIRED — HARDWARE BAG REQUIRED: BGT

Hardware shown at actual size (*unless otherwise indicated)



**AJA** (x8)*
Foam Cube



**AED** (x8)
#10 x 1" Fender Washer



**ADZ** (x120)
1/4" x 5/8" Phillips Pan-Head Screw

**ACJ** (x8)
#10 x 5/8" Phillips Pan-Head Screw

## METAL PARTS REQUIRED

Part shown at 8% of actual size




**AFL** (x12)
Roof Support Strip

## PLASTIC PARTS REQUIRED

Parts shown at 4% of actual size

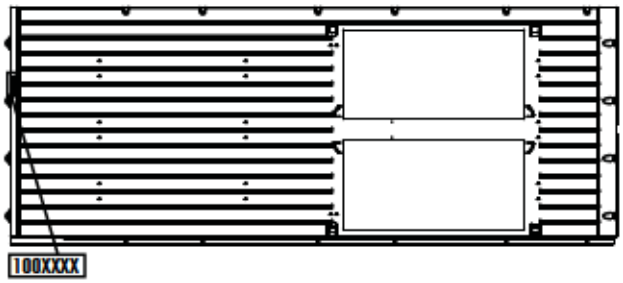


**AHH** (x2) Window Wall Panel Assembly (Assembled in Section 4)

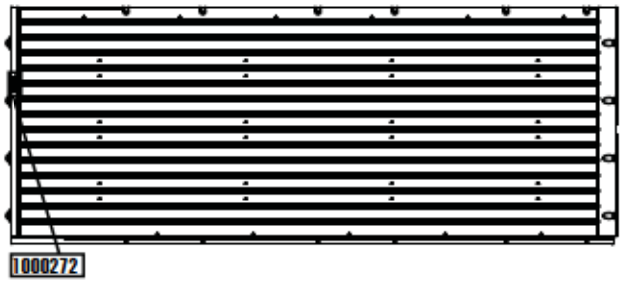


**AHD** (x2) Wall Panel

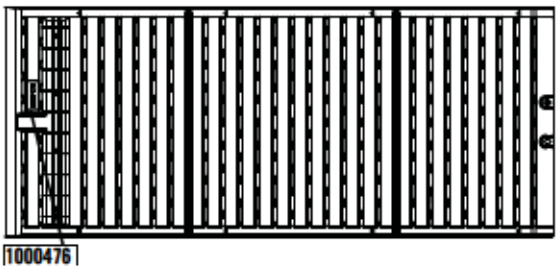


**AGQ** (x4) Center Roof Panel

Part shown at 8% of actual size

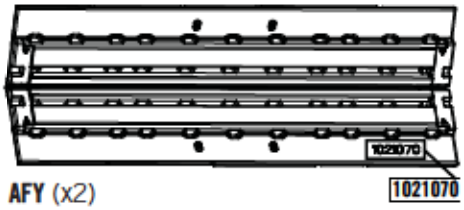


**AFY** (x2)
Center Roof Cap

## TOOLS REQUIRED



**Phillips Screwdriver**

**7/16" Wrench** (x2)

**Safety Glasses**

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**ADZ** (x24)

## SEC 6.1

Insert a Wall Panel you removed previously as well as the **Wall Panel (AHD)** and **Window Wall Panel (AHH)** provided with this kit. You can insert the Panels in any of the available locations. Use the 1/4" x 5/8" Phillips Pan-Head Screws you removed previously as well as the **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)** provided with this kit to secure the Panels together. **Repeat this step for the opposite side of the shed.**

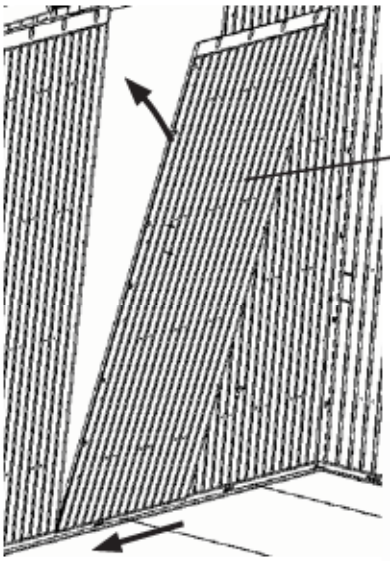


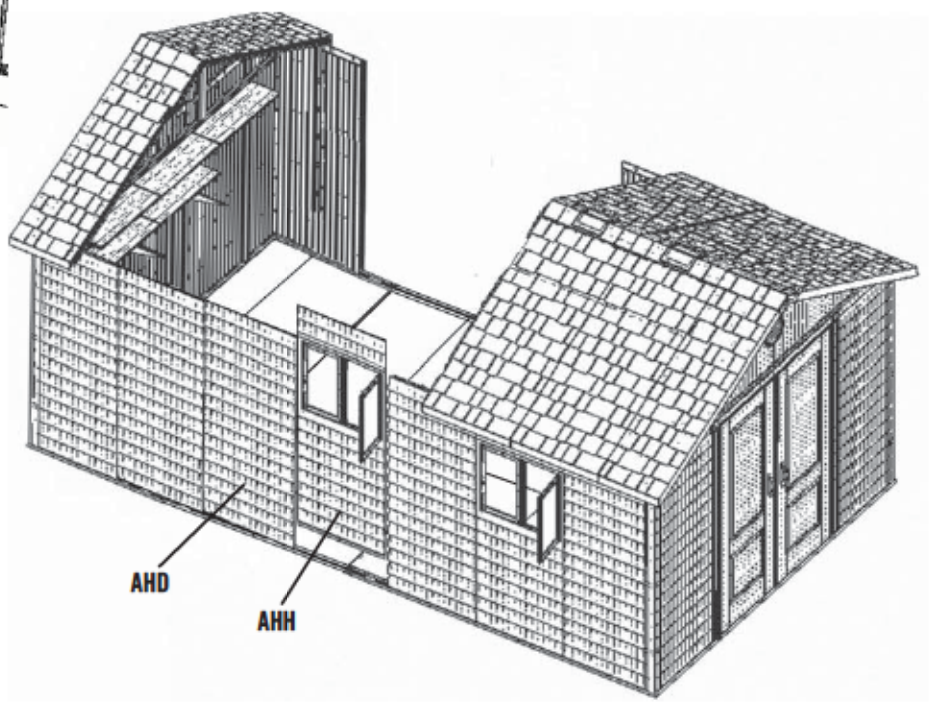

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE





**ADZ** (x32)

**SEC 6.2**

Connect the Truss Assembly you removed previously as well as the two Truss Assemblies you built using this kit to the center of each Wall Panel and Window Wall Panel with **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**.

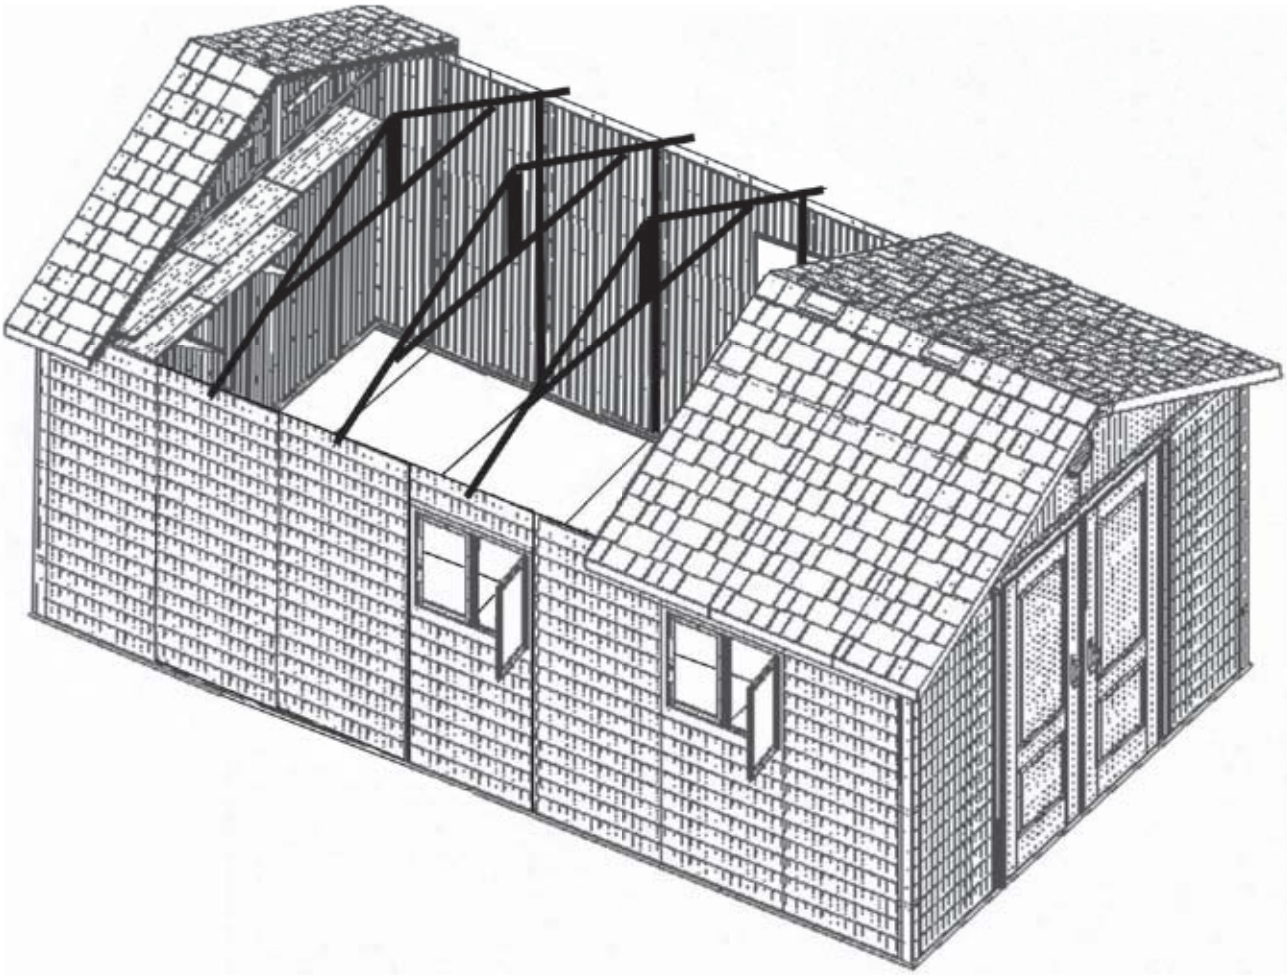

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**ADZ** (x48)

**ACJ** (x8)



**AED** (x8)

SEC 6

SEC 6.4

Connect the Center Roof Panels, Roof Support Strips, and Center Roof Caps you removed previously as well as the **Center Roof Panels (AGQ)**, **Roof Support Strips (AFL)**, and **Center Roof Caps (AFY)** provided with this kit using **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**.

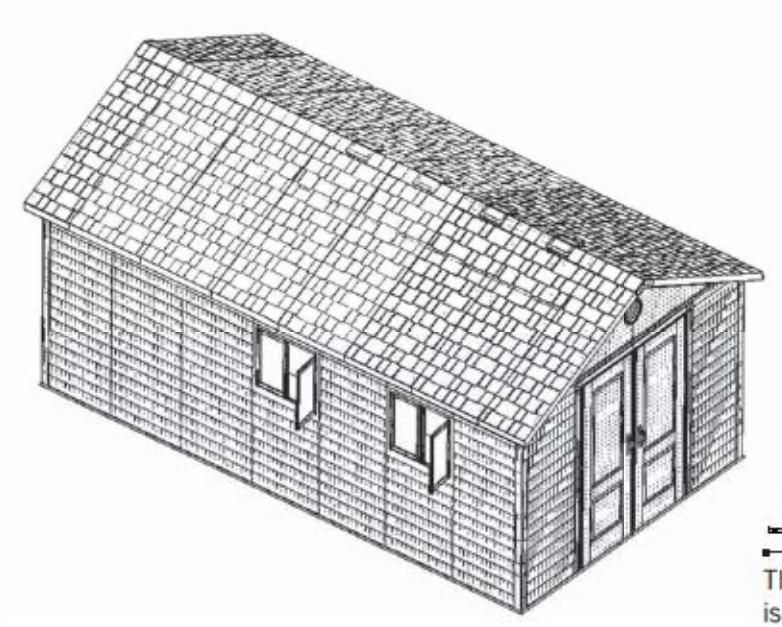

**AFL**




The hole at the end of the Roof Support Strip is for manufacturing purposes only.

**!** *Note: Only use a hand screwdriver on this step.*

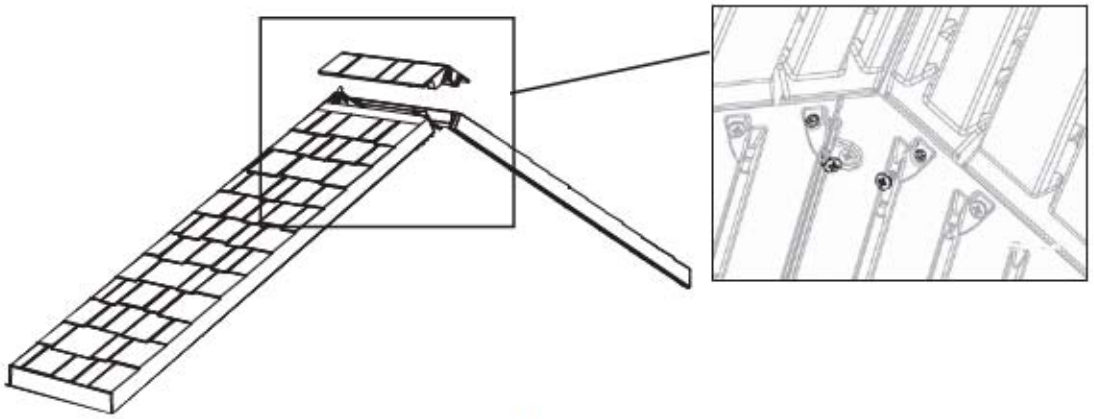

## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE





**AJA** (x8)



**ADZ** (x8)

## SEC 6.5

Connect the Truss Gutter Channels to the underside of the bottom of the Roof Panels using **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**. When finished, insert **Foam Cubes (AJA)** inside the Truss Gutter Channels at the locations shown. If you plan on anchoring your Shed, follow the instructions that came with you original owner's manual.

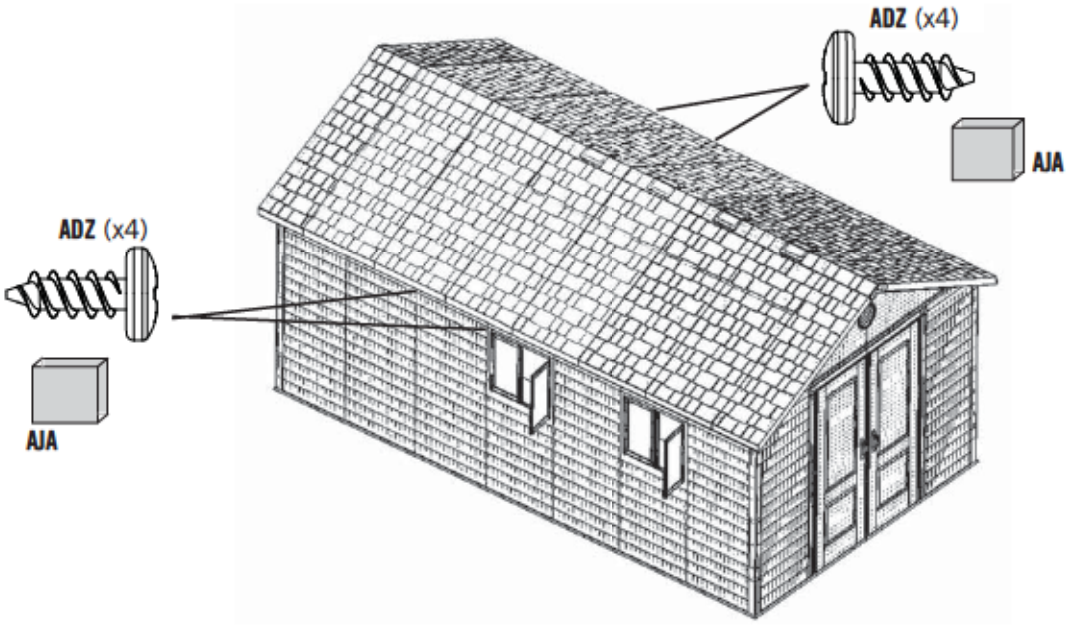


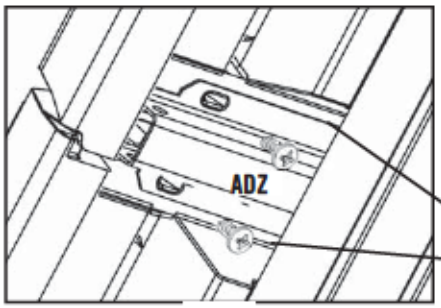


Fig. 1



**AJA**

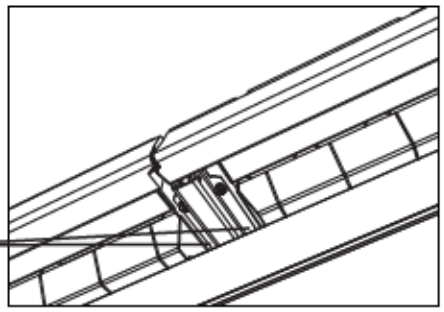

Fig. 2

## 10-YEAR LIMITED FACTORY WARRANTY

**THE MANUFACTURER RESERVES THE RIGHT TO MAKE SUBSTITUTIONS TO WARRANTY CLAIMS IF PARTS ARE UNAVAILABLE OR OBSOLETE.**

1. Lifetime outdoor sheds are warranted to the original purchaser to be free from defects in material or workmanship for a period of ten years from the date of original retail purchase. The word "defects" is defined as imperfections that impair the use of the product. Defects resulting from misuse, abuse or negligence will void this warranty. This warranty does not cover defects due to improper installation, alteration or accident. This warranty does not cover damage caused by vandalism, rusting, "acts of nature" or any other event beyond the control of the manufacturer.

2. This warranty is nontransferable and is expressly limited to the repair or replacement of defective product. If the product is defective within the terms of this warranty, Lifetime Products, Inc. will repair or replace defective parts at no cost to the purchaser. Shipping charges to and from the factory are not covered and are the responsibility of the purchaser. Labor charges and related expenses for removal, installation or replacement of the shed or its components are not covered under this warranty.

3. This warranty does not cover scratching or scuffing of the product that may result from normal usage. In addition, defects resulting from intentional damage, negligence, unreasonable use or hanging from the truss will void this warranty.

4. Liability for incidental or consequential damages is excluded to the extent permitted by law. While every attempt is made to embody the highest degree of safety in all equipment, freedom from injury cannot be guaranteed. The user assumes all risk of injury resulting from the use of this product. All merchandise is sold on this condition, and no representative of the company may waive or change this policy.

5. This product is not intended for institutional or commercial use; Lifetime Products, Inc. does not assume any liability for such use. Institutional or commercial use will void the warranty.

6. This warranty is expressly in lieu of all other warranties, expressed or implied, including warranties of merchantability or fitness for use to extent permitted by Federal and state law. Neither Lifetime Products, Inc., nor any representative assumes any other liability in connection with this product. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

**PLEASE INCLUDE YOUR DATED SALES RECEIPT AND PHOTOGRAPHS OF DAMAGED PARTS.**

REPORT PRODUCT DEFECTS IN WRITING TO:
Lifetime Products, Inc., PO Box 160010 Clearfield, UT 84016-0010
or call 1-800-225-3865 M-F 7 a.m. to 5 p.m. MST.

**REGISTER YOUR PRODUCT FOR QUICKER CUSTOMER SERVICE.**

Visit www.lifetime.com or call 1-800-225-3865 to register your product today.

**FOR INTERNATIONAL WARRANTY CLAIMS:**

All warranty claims must be accompanied by a sales receipt. Report all warranty claims in writing to your regional sales support representative. Please include your dated sales receipt and photographs of damaged parts.
To Identify the representative for your region — Please visit: www.lifetime.com/international

LIFETIME

www.lifetime.com

## ENHANCE YOUR LIFETIME® PURCHASE BY ADDING ACCESSORIES OR OTHER GREAT PRODUCTS

*To purchase accessories or other Lifetime Products, visit us at:*

# *www.lifetime.com*

*Or call: 1-800-424-3865*